

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 30, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: $47^{\circ} 00' 34.65496''$
 Longitude: $94^{\circ} 31' 23.50522''$


On 7/14/88 found a 2" iron monument with brass cap

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

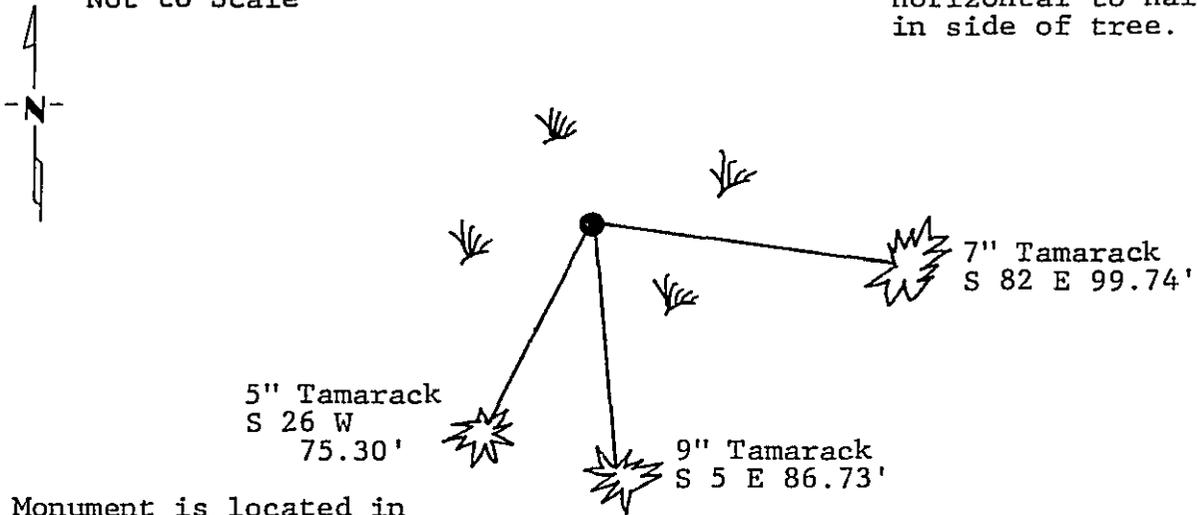

Monument is located in a cranberry bog with scattered Tamarack and Black Spruce, 150' more or less westerly of the East edge of the bog. Old remnant fence East. Sign post north 5.0' Sign post east 5.0'

Monument Stamped

T 141 N R 30 W

$\frac{1}{4}$ S 19 S 30

1965

R.L.S. No. 6807

Statement of evidence relative to this corner location is on back of page. 309846

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:50 A.M. on the 12 day of January A.D., 19 89

County Recorder Blair Kaye

By Ms, Deputy

DOCUMENT NO. 309846

Statement of Evidence: North Quarter Corner Section 30, Township 141
North, Range 30 West, Cass County, Minnesota

R-3 141-30
Bk.5 Pg.13

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 6 inch Tamarack North 41 degrees West a distance of 139 links; and a 4 inch Tamarack South 9 degrees West a distance of 154 links.

1922 County Surveyor's Record Book C pages 468-469 show survey by E.B. Horst. He found the corner and set a 2 inch by 48 inch iron monument.

1922 Count resurvey in County Recorder's Office file cabinet E Number 38 shows survey by E. B. Horst. Set a 2 inch by 48 inch iron monument.

1964 U.S. Forest Service found the corner monumented with a 2 inch diameter iron pipe at fence corner. Reset a 2 inch by 5 foot iron pipe with brass cap; a 5 inch Tamarack South 26 degrees West a distance of 75.3 feet; a 7 inch Tamarack South 5 degrees East a distance of 86.9 feet; and a 6 foot signpost North 12.7 feet.

1969 U.S. Forest Service Surveyor Bill Okerman filed corner certificate using 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 14 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument with county cap monument alongside northwesterly. Monument is located in a cranberry bog with scattered Tamarack and Black Spruce 150 feet, more or less, Westerly of East edge of bog. 1965 bearing trees: a 9 inch Tamarack South 5 degrees East a distance of 86.73 feet; and a 5 inch Tamarack South 26 degrees West a distance of 75.30 feet. New tie: a 7 inch Tamarack South 82 degrees East a distance of 99.74 feet. Pulled the old 6 foot signpost and signs and set new posts and signs 54-2 and 54-9 North 5.0 feet and East 5.0 feet.