

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 30, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 34.44289"
 Longitude: 94° 30' 44.51793"


On 7/14/88 found a 2" iron monument with brass cap

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 not to Scale

All distances are horizontal to nail in side of tree.

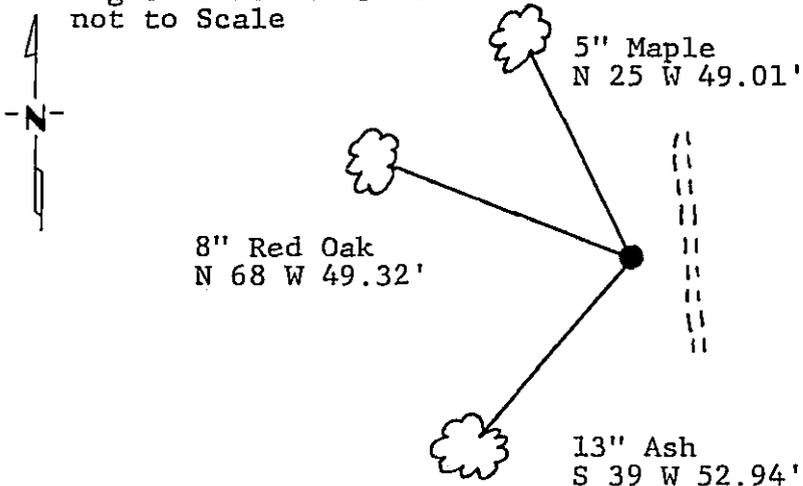

Monument is located 22' west of logging trail running North and South Remnant fence West and South. Alder Swamp Easterly.
 Sign post west 6.3'
 Sign post south 3.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N R 28 W

S 19	S 20
S 30	S 29

 1965

R.L.S. No. 6807

Statement of evidence relative to this corner location is on back of page. 309847

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:55 A.M. on the 12 day of January A.D., 1989

County Recorder Claudia Keyser
 By ms, Deputy

DOCUMENT NO. 309847

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: A 15 inch Yellow Pine North 49 and 1/2 degrees West a distance of 50 links; a 10 inch White Pine South 20 and 1/2 degrees West a distance of 38 links; a 13 inch White Pine South 43 degrees East a distance of 11 links; and a 12 inch Tamarack North 46 degrees East a distance of 66 links.

1922 County Surveyor's Record Book C pages 466-469 show survey by E.B. Horst. He found stumps of bearing trees and set a 2 inch by 48 inch iron monument.

1922 County resurvey in County Recorder's Office file cabinet E, Number 38 shows a survey by E.B. Horst. He set a 2 inch by 48 inch iron monument.

1964 U.S. Forest Service found the corner monumented with a 2 inch county monument. They set a 2 inch by 5 foot iron pipe with brass cap; and signpost with signs 54-4 and 54-2 due West 3.6 feet. The following bearing trees were marked: a 20 inch Norway Pine North 34 degrees West a distance of 42.5 feet; a 8 inch Ash North 65 degrees East a distance of 24.1 feet; a 4 inch Maple South 44 degrees East a distance of 10.4 feet; and a 14 inch Oak South 52 degrees West a distance of 10.3 feet.

1969 U.S. Forest Service Surveyor Bill Okerman filed corner certificate using 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 14 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 2 inch iron pipe with brass cap monument up 24 inches, county monument alongside Northeasterly; all 1965 bearing trees are down; to the Southeast and Northeast there is a clearcut and Alder swamp; found decayed pieces of Southeast original bearing tree at bearing and distance; monument is located 22 feet, more or less, West of logging trail, remnant fence Westerly and Southerly. New ties: a 5 inch Maple North 25 degrees West a distance of 49.01 feet; a 8 inch Red Oak North 68 degrees West a distance of 49.32 feet; and a 13 inch Ash South 39 degrees West a distance of 52.94 feet. Left 6 foot signpost West 6.3 feet; new 8 foot signpost and signs 54-2 and 54-9 South 3.0 feet.