


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 30, Township 141 N, Range 29 W, 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 00' 31.422"  
 Longitude: 94° 23' 07.938"

- On 7/18/88 found a 2" iron monument  
DATE  
replaced monument with a brass cap monument  
 left monument as found,  lowered monument,  removed monument (explain)
- On 7/18/88 placed a 2" x 36" iron monument with a brass cap  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail  
 Not to Scale in side of tree.

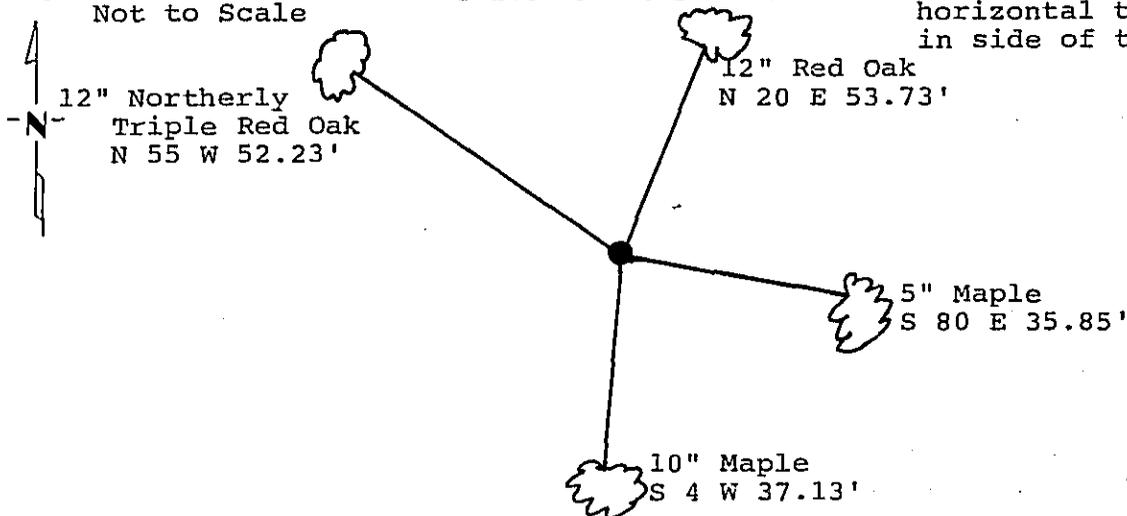

Monument is located  
 northeasterly of  
 swamp in woods

8' steel sign post East 5.0'  
 8' steel sign post South 5.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

|         |        |
|---------|--------|
| T 141 N | R 29 W |
| S 19    | S 20   |
| S 30    | S 29   |

1988

RLS No. 17008

Statement of evidence relative to this corner location is on back of page.

310043

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:20 A.M. on the 25 day of January A.D., 1989  
 County Recorder Claudia Kayle  
 By M.S., Deputy  
 DOCUMENT NO. 310043

Statement of Evidence:

Northeast Corner Section 30, Township 141  
North, Range 30 West, Cass County, Minnesota

R-5 141-30  
Bk.6 Pg.2

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 10 inch Oak North 62 and 1/2 degrees West a distance of 13 links; a 12 inch Maple North 52 degrees East a distance of 10 links; a 8 inch Poplar South 43 degrees West a distance of 23 links; and a 14 inch White Pine South 59 degrees East a distance of 45 links.

1917 County Surveyor's Record Book C page 267 show survey by John Curo. Found stake established by Kemp as set from Government bearing trees in place.

1937 U.S. Forest Service records show the following: J.A. Ghelhaug shows monument in place in survey of tower site, in Section 20, Township 141 North, Range 30 West.

1981 U.S. Forest Service records show the following: a 2 and 1/2 inch by 48 inch capped iron pipe in place and original Pine bearing tree South 59 degrees East a distance of 29.70 feet, rock pile around monument.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 18 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch iron pipe with cap and remains of Pine stump South 59 degrees East a distance of 29.20 feet. Placed a new 2 inch by 36 inch iron pipe with brass cap cemented in place in rock pile, rocks cemented around monument. 4 new bearing trees were marked and two 8 foot steel sign post set as shown on front of this certificate.