

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 36, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 39.309"
Longitude: 94° 25' 03.858"


On 5/19/88 found a 2" iron monument with a brass cap.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

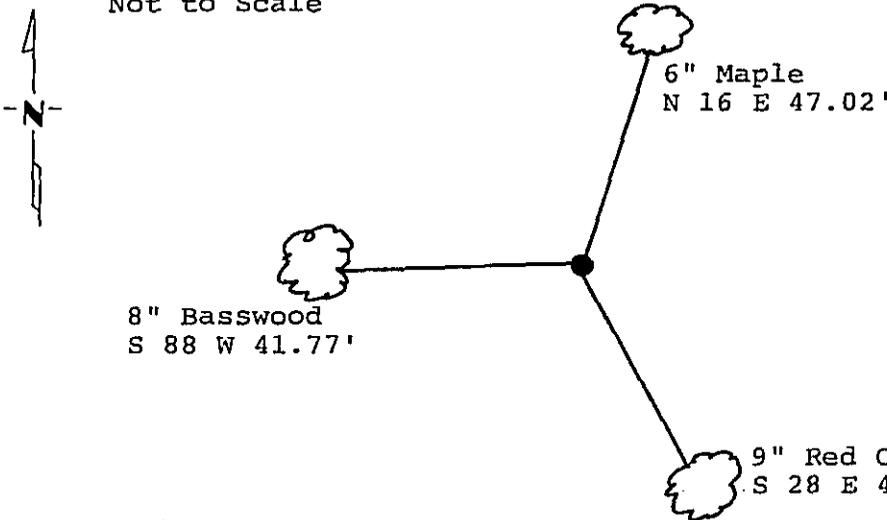

Monument is located in woods 1500' more or less north of United States Forest Service Road #2107
6' sign post west 7.40'
8' sign post east 8.30'

Monument Stamped

T 141 N R 30 W
S 25

S 36

1965

RLS No. 6807

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

310681

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:40 P. M. on the 1 day of March A.D., 1989

County Recorder Claudine Kayler
By M.S., Deputy

DOCUMENT NO. 310681

Statement of Evidence: North Quarter Corner Section 36, Township 141
North, Range 30 West, Cass County, Minnesota

V-23 141-30
BK.4 Pg.21

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Red Oak North 11 and 1/2 degrees East a distance of 39 links; and a 14 inch White Pine South 35 and 1/2 degrees West a distance of 35 links.

1937 Civilian Conservation Corps found a capped iron pipe perpetuating the corner position, assumed to have been established by county surveyor.

1965 U.S. Forest Service records show the following: found iron pipe with cap. Set a 2 inch by 5 foot capped iron pipe and the following witnesses: a 4 inch Maple North 36 degrees West a distance of 22.8 feet; a 5 inch Maple South 44 degrees East a distance of 11.2 feet; a 12 inch Norway Pine South 86 degrees East a distance of 39.8 feet; and a 6 foot sign post West a distance of 7.4 feet.

1969 U.S. Forest Service Surveyor, Bill Okerman, filed corner certificate using the 1965 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 19 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: USFS brass cap monument, 2 inch capped iron and 6 foot sign post West 7.40 feet. New bearing trees were marked and steel sign post in place as shown on front of this certificate.