

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 28, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 47° 00' 30.718"  
 Longitude: 94° 28' 15.187"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10/11/88 placed a 2 inch by 48 inch iron pipe with Brass cap.  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

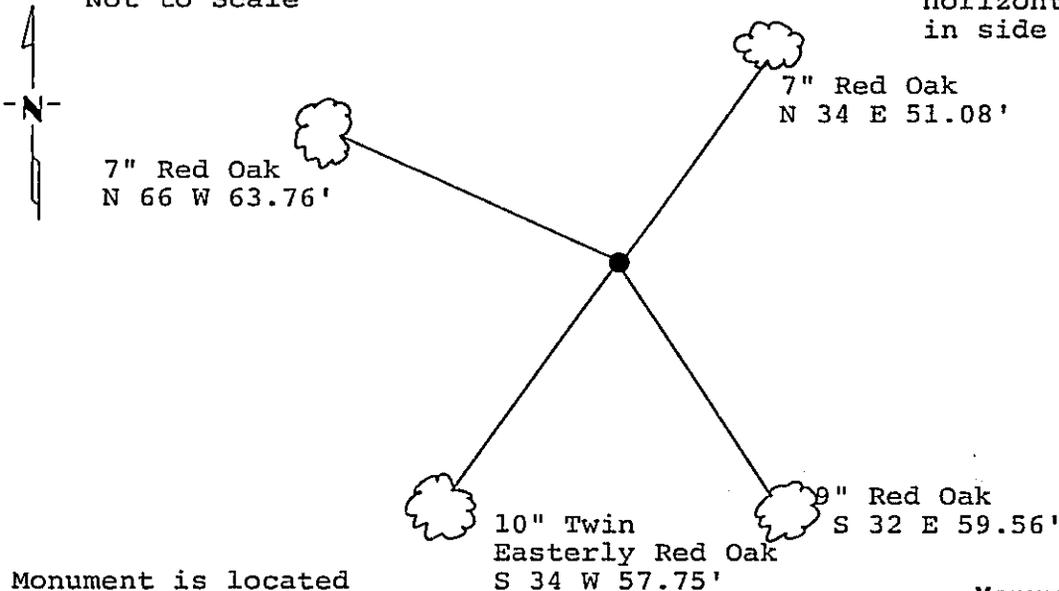

Monument is located on top of Hardwood Plateau.  
 8' Sign post West 5.0'  
 8' Sign post South 5.0'

Monument Stamped  
 T 141 N R 30 W  
 S21 | S22  
 S28 | S27  
 1988  
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 311067

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:10 P. M. on the 27 day of March A.D., 1989

County Recorder Claudine Kayler  
 By MS, Deputy

DOCUMENT NO. 311067

Statement of Evidence:

Northeast Corner Section 28, Township 141 North,  
Range 30 West, Cass County, Minnesota

R-13     141-30  
Bk.5     Pg.45

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 10 inch Spruce North 5 and 1/2 degrees East a distance of 15 links; a 12 inch Birch North 44 degrees West a distance of 10 links; a 16 inch White Pine South 26 degrees West a distance of 73 links; and a 8 inch Birch South 33 degrees East a distance of 77 links.

1964 U.S. Forest Service technician Ekstrom searched for the corner, found no evidence of original bearing trees or post.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 8 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: corner position fits well with geographical call measurements to the north side of pond located south as noted in the original survey.

1988 on October 11 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet at the lost proportional position along the east line Sections 21 and 28, said township. This position fit the geographical location to the pond as noted in the original survey. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate.