

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH EAST Corner of Section 35, Township 141N, Range 28W, 5th P.M.

STATE OF MINNESOTA, County of CASS

Latitude: 46° 59' 33.786"

Longitude: 94° 10' 59.269"

At the corner location shown on the sketch:


On 6-20-88 found a 2" iron monument with brass cap (GLO)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

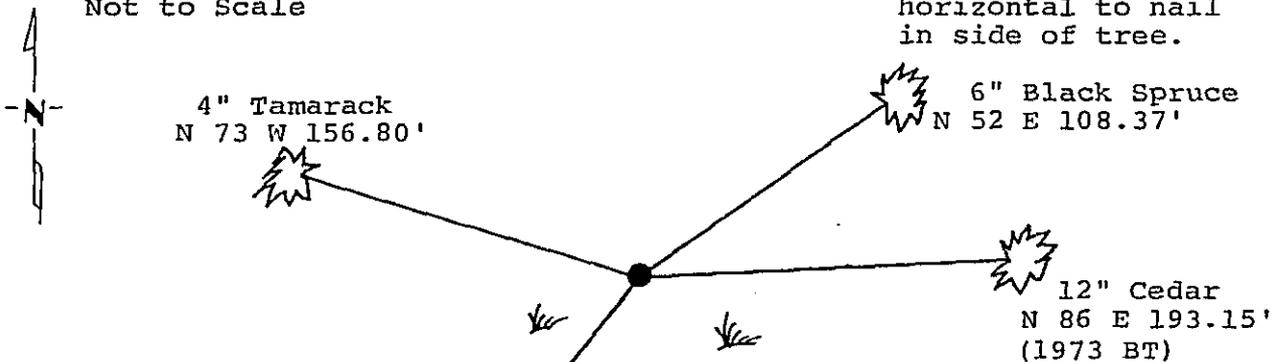

Monument is located in Tamarack & Spruce bog on east side of Bullhead Lake. Set 8' sign post on north side of monument for stabilization.

Sign post south 5.0'
Sign post east 5.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N R 28 W

S 26	S 25
S 35	S 36
1918	

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 3/31/89 Registration No. 17008

311164

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:30 A.M. on the 3rd day of April A.D., 19 89

County Recorder Claudine Kaylow
By Bjk, Deputy

DOCUMENT NO. 311164

Statement of Evidence:

Northeast Corner Section 35, Township 141
North, Range 28 West, Cass County, Minnesota

V-21 141-28
Bk.7 Pg.9

1874 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 28 West. The notes indicate a wood post was set to mark the corner position. Corner fell in bog, no trees available for ties.

1913 County Surveyor's Record Book A pages 564-567 show survey by John Curo. He found wood stake in place.

1918 U.S. General Land Office dependant resurvey found the corner marked by wood stake, which checks with original topography calls in the area. A 2 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 10 inch Cedar North 56 degrees East a distance of 228 links; and a 12 inch Tamarack South 82 and 1/2 degrees East a distance of 278 links.

1973 U.S. Forest Service notes show the following: found the corner monumented with a brass cap and squared wood post alongside. The following bearing trees were marked: a 13 inch Spruce North 49 degrees East a distance of 166.8 feet; an 11 inch Cedar North 86 degrees East a distance of 192.6 feet.

1979 U.S. Forest Service Surveyor, Milo Stefan, Licensed Land Surveyor Number 12261, filed a corner certificate with the Cass County Recorder as document number 246216, using the 1973 information:

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 20 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch brass cap monument down 6 inches with squared wood post alongside. Raised monument to surface and set an 8 foot sign post on North side and tied monument to post to stabilize. 1973 Northeast bearing tree is dead 30 foot stub and 1973 bearing tree is now 12 inch Cedar North 86 degrees East a distance of 193.14 feet. New bearing trees were marked as shown and steel sign post is in place as noted on front of this certificate.