

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

STANDARD SOUTHEAST Corner of Section 34, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 46° 58' 48.515"

Longitude: 94° 26' 57.749"


On 6/29/88 found a 2" iron monument with a brass cap. (USFS)

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

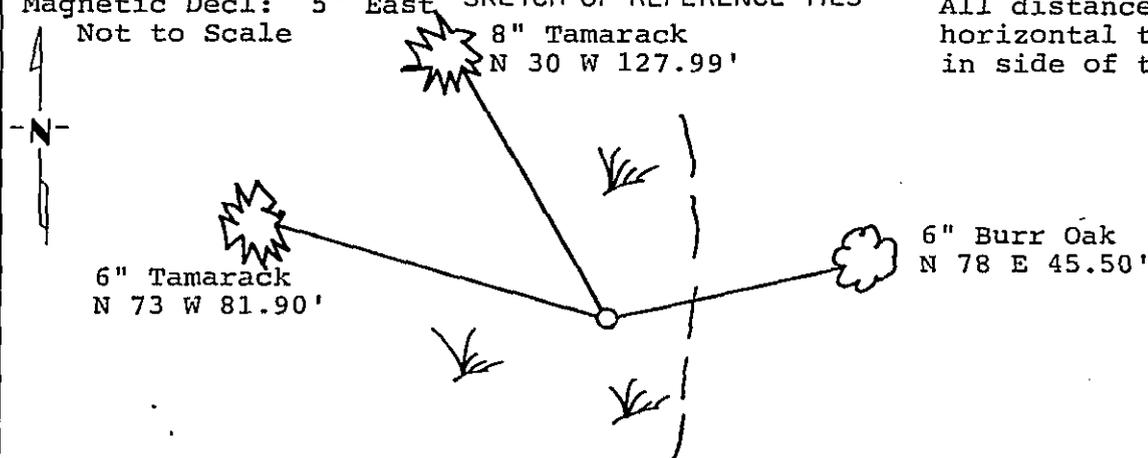

Monument is located in a cranberry and Tamarack bog 20' more or less west of edge
6' sign post west 7.5'
8' sign post east 5.0'

Monument Stamped

T 141 N R 30 W

SC

S 34 | S 35

S3

T 140 N

1965

RLS No. 6807

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 3/31/89 Registration No. 17008

311188

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:30 P.M. on the 3rd day of April A.D., 19 89

County Recorder Claudine Kaylow
By DJK, Deputy

DOCUMENT NO. 311188

Statement of Evidence:

Standard Southeast Corner Section 34, Township
141 North, Range 30 West, Cass County, Minnesota

Z-17 141-30
Bk.5 Pg.26

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Spruce North 40 degrees West a distance of 8 links; and a 7 inch Spruce North 74 degrees East a distance of 13 links.

1938 Civilian Conservation Corps found corner and show measurements along the South line of said Section 34.

1965 U.S. Forest Service found the corner monumented with a 1 and 1/2 inch iron pipe. Set a 2 inch by 60 inch iron pipe with a bronze tablet positioned on top of rock; rocks piled around pipe; 6 foot sign post set West 7.5 feet. The following bearing trees were marked: a 4 inch Tamarack North 41 degrees West a distance of 109.0 feet; and a 6 inch Birch North 58 degrees East a distance of 48.2 feet.

1969 U.S Forest Service Surveyor, Bill Okerman, Registered Land Surveyor Number 6807, filed a corner certificate on September 5, with the Cass County Recorder as certificate Number 534, using the 1965 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 29 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: Forest Service brass cap up 35 inches in rock pile 20 feet, more or less, Westerly of East edge of cranberry and Tamarack bog; both 1965 bearing ties are snags; 6 foot sign post East 5.0 feet, signs 54-2 and 54-4; 8 foot sign East 5.0 feet, signs 54-2 and 54-9. New bearing trees: 6 inch Burr Oak North 78 degrees East a distance of 45.50 feet; a 6 inch Tamarack North 73 degrees West a distance of 81.90 feet; and a 8 inch Tamarack North 30 degrees West a distance of 127.99 feet. Measurements from the corner fit well with those as noted by the CCC.