

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 19 Meander Corner of Sections 32/33, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 22.161"  
 Longitude: 94° 21' 54.249"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3/16/89 placed a 2" by 48" iron pipe with brass cap and  
DATE  
plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

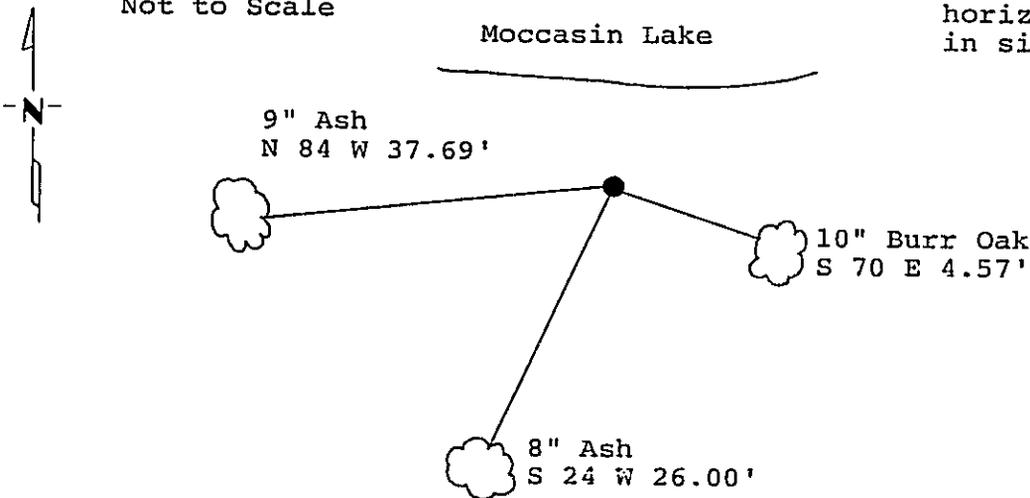

Monument is located  
 40'± West of West edge  
 of parking lot for boat  
 access and 65'± South of  
 waters edge.

8' steel sign post North 4.0'

All trees are painted with red enamel and  
 marked with a 54-3 (bearing tree) tag.

Monument Stamped  
 T 141 N R 29 W  
 MC  
 S32 | S33  
 1989  
 RLS 17008

Statement of evidence relative to this corner location is on back of page.

311847

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:55 P. M. on the 3 day of May A.D., 19 89

County Recorder Claudine Kaye  
 By MS, Deputy

DOCUMENT NO. 311847

Statement of Evidence:

Meander Corner Number 19 Section 32, Township 141  
North, Range 29 West, Cass County, Minnesota

WX-9 141-29  
Bk.6 Pg.31

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch White Pine South 13 degrees West a distance of 29 links; and a 14 inch White Pine South 6 degrees East a distance of 41 links.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 23 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of original post or accessories. This corner was determined lost.

1989 on March 14 and 16 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportion position between the Northeast corner of Section 32 and Meander Corner Number 18. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.