

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

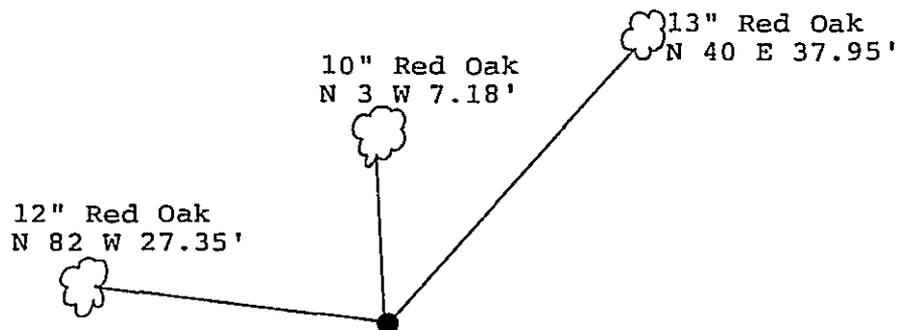

Standard

 South Quarter _____ Corner of Section 32, Township 141 N, Range 30 W, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

Latitude: 46° 58' 47.341"Longitude: 94° 30' 08.194"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 2/15/89 placed a 2" by 48" iron pipe with brass cap, plastic
DATE
base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to ScaleAll distances are
horizontal to nail
in side of tree.

Monument is located 18"±
Southerly of trail in
hardwoods, approximately
120' Southerly of plantation.
8' steel sign post East 5.0'
8' steel sign post West 5.0'

Monument Stamped
R30W
SC
¼ S | 32 T141N
T140N
1989
RLS 17008

All trees are painted with red enamel
and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

311859

I hereby certify that this survey, plan or
report was prepared by me or under my
direct supervision and that I am a duly
Registered Land Surveyor under the laws
of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in
the Co. Recorders office at 4:07 P.M. on the
3 day of May A.D., 1989

County Recorder Claudia KaylBy MS, DeputyDOCUMENT NO. 311859

Statement of Evidence:

Standard South Quarter Corner Section 32,
Township 141 North, Range 30 West, Cass County,
Minnesota

Z-7 141-30
Bk.9 Pg.2

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Sugar Maple North 41 degrees West a distance of 42 links; and a 6 inch Sugar Maple North 8 degrees a distance of 75 links.

1965 U.S. Forest Service records show the following: technician Ekstrom chained from pipe at Closing Corner of 5 and 6, Township 140 North, Range 30 West. He found a 2 inch iron pipe (must be the North Quarter Corner of 5).

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on August 29 a Landecker-Stevenson & Associates crew searched for the corner. No evidence of Maple bearing trees was found; dug for post and found nothing. Corner determined lost.

1989 on February 15 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet at the lost, single proportion position along the 10th Standard Parallel arc between the Southwest and Southeast corners of said Section 32. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate.