

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 16, Township 139 N., Range 26 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 01-28-1988 found a 1 1/2" IRON PIPE UP 1.0'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

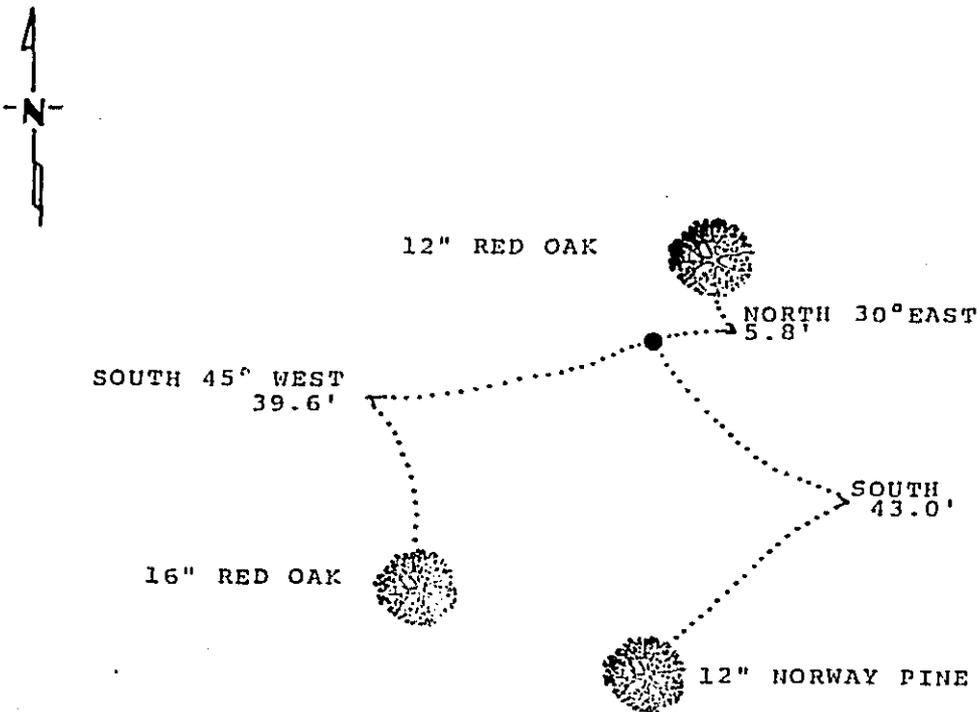

BEARINGS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

D.D.S. 4-4-88
FILE F-761

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-14-89
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:05 P. M. on the 22 day of May, 1987

County Recorder Clarence K. Kapp

By MS, Deputy

DOCUMENT NO. 312281

Northeast Corner Section 16, Township 139 North, Range 26 West

The following offices were contacted for information concerning this corner:

MN Secretary of State
Cass County Surveyor
Mn/DNR Washburn Forestry Station

- 1863 This corner was established by the U.S. General Land Office, marked with a wood post and witnessed by four bearing trees.
- 1938 The Civilian Conservation Corp at 5285 feet from south set a 4" square post for approximate corner.
- 1957 Sabin's Eastburn Addition plat by Dean Anderson, RLS, shows a monument at the southeast corner of Section 9 with three bearing trees.
- 1988 The DNR Bureau of Engineering found a 1½" iron pipe. Dean Anderson's ties were in place and checked. The pipe was accepted as marking the location of the corner.