


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 22, Township 134N, Range 31W, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/24/86 placed a 2"x 18" telespar monument with stamped
DATE
aluminum cap in centerline north to south road.

SKETCH OF REFERENCE TIES

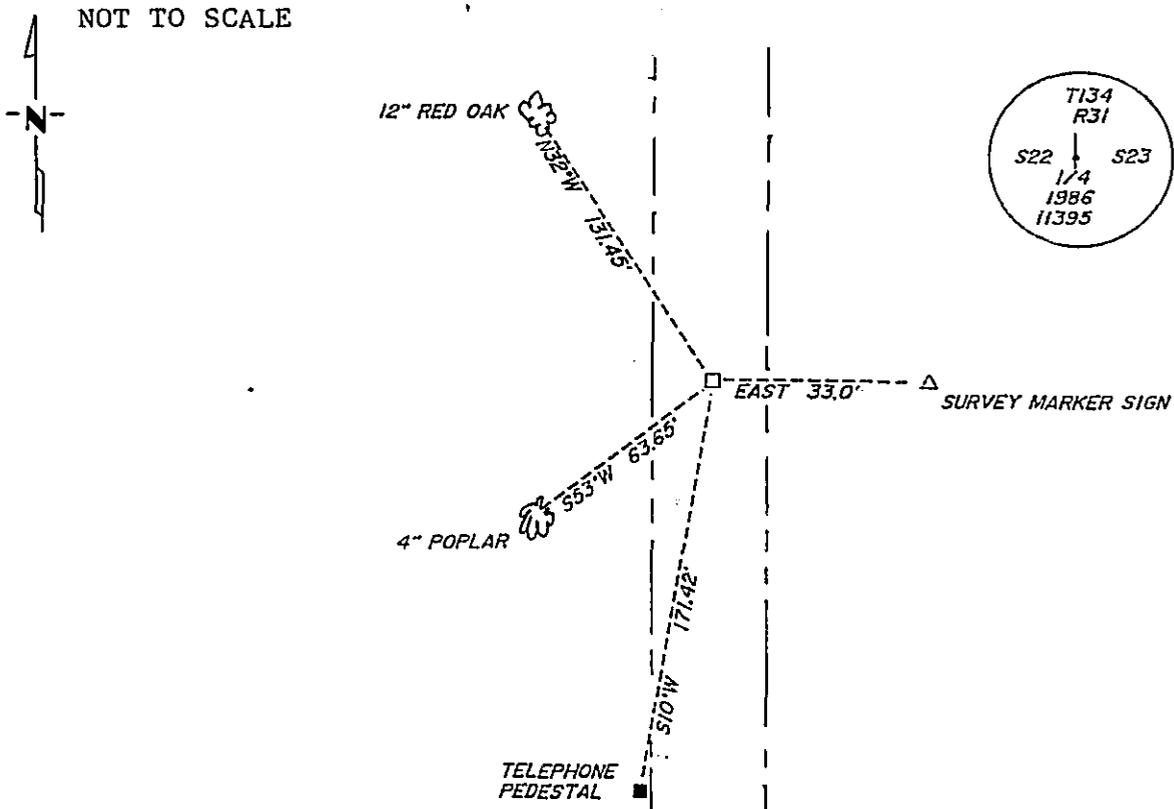

Statement of evidence relative to this corner location is on back of page. 318244

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Olson 1-29-90
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:16 P. on the 31 day of January A.D., 19 90

County Recorder Claudia Kayler
 By ms, Deputy

DOCUMENT NO. 318244

Statement of Evidence:

P-17

East Quarter Corner, Section 22, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 2" Oak S60E 45 links, and an 8" Aspen S58E 32 links.
- 1986 On May 14, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in the north to south road at the north to south position provided by the Comstock and Davis Company. They dug 12' north to south by 9' east to west by 2' deep. They found 3" of top soil, 9" of fill, and 1' of sandy clay with some rocks.
- 1986 On September 24, Terry Freeman and Norman Morris set a 2"x 18" telespar monument down 6" in the centerline road north to south at split between the northeast and southeast corners in section 22. This location was provided by Comstock and Davis.