

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 35, Township 134N., Range 31W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE \_\_\_\_\_  
 left monument as found,  lowered monument,  removed monument (explain)
- On 9/17/86 placed a cast iron monument down 10" in the centerline  
DATE 9/17/86 of the east to west road in line with fences north and south.

### SKETCH OF REFERENCE TIES

NOT TO SCALE

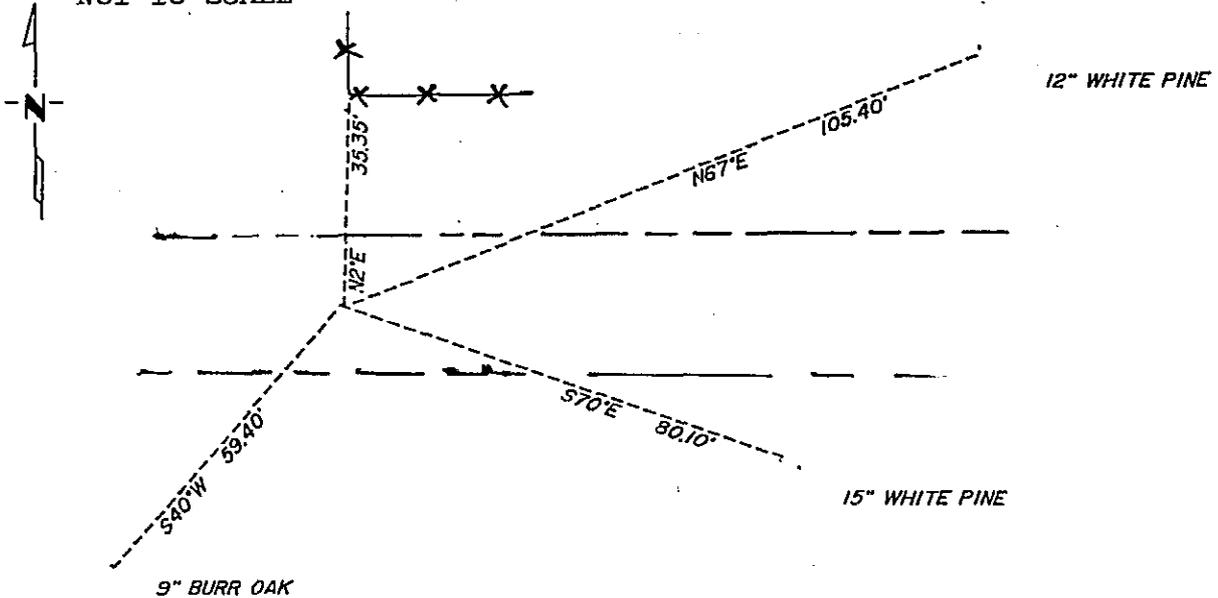

SURVEY MARKER SIGN NORTH 25.0'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter C. Olson 4-18-90  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

319823

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:45 A .M. on the 23rd day of April A.D., 19 90

County Recorder Claudine Kayler  
By Bjk, Deputy

DOCUMENT NO. 319823

Statement of Evidence:

V-19

North Quarter Corner, Section 35, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 10" Oak S10E 20 links, a 4" Oak N8E 18 links.
- 1986 On May 19, Cass County Survey Technician Terry Freeman and backhoe operator Glen Williams dug in the area of the east to west road and fences north and south. The area dug was 9' north to south by 11' east to west by 3.5'. They found the soil to be all sand and couldn't determine if it was fill or natural sand. They at least 2.5' below in the surrounding area.
- 1986 On September 17, Terry Freeman set a cast iron monument in the centerline of the east to west road in line with fences to the north and the south.