


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 19, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 8, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) set a brass monument at the centerline of County Road 63. The quarter corner was on line between the NE and SE of section 19 and set according to the proportion from the 1920 survey.

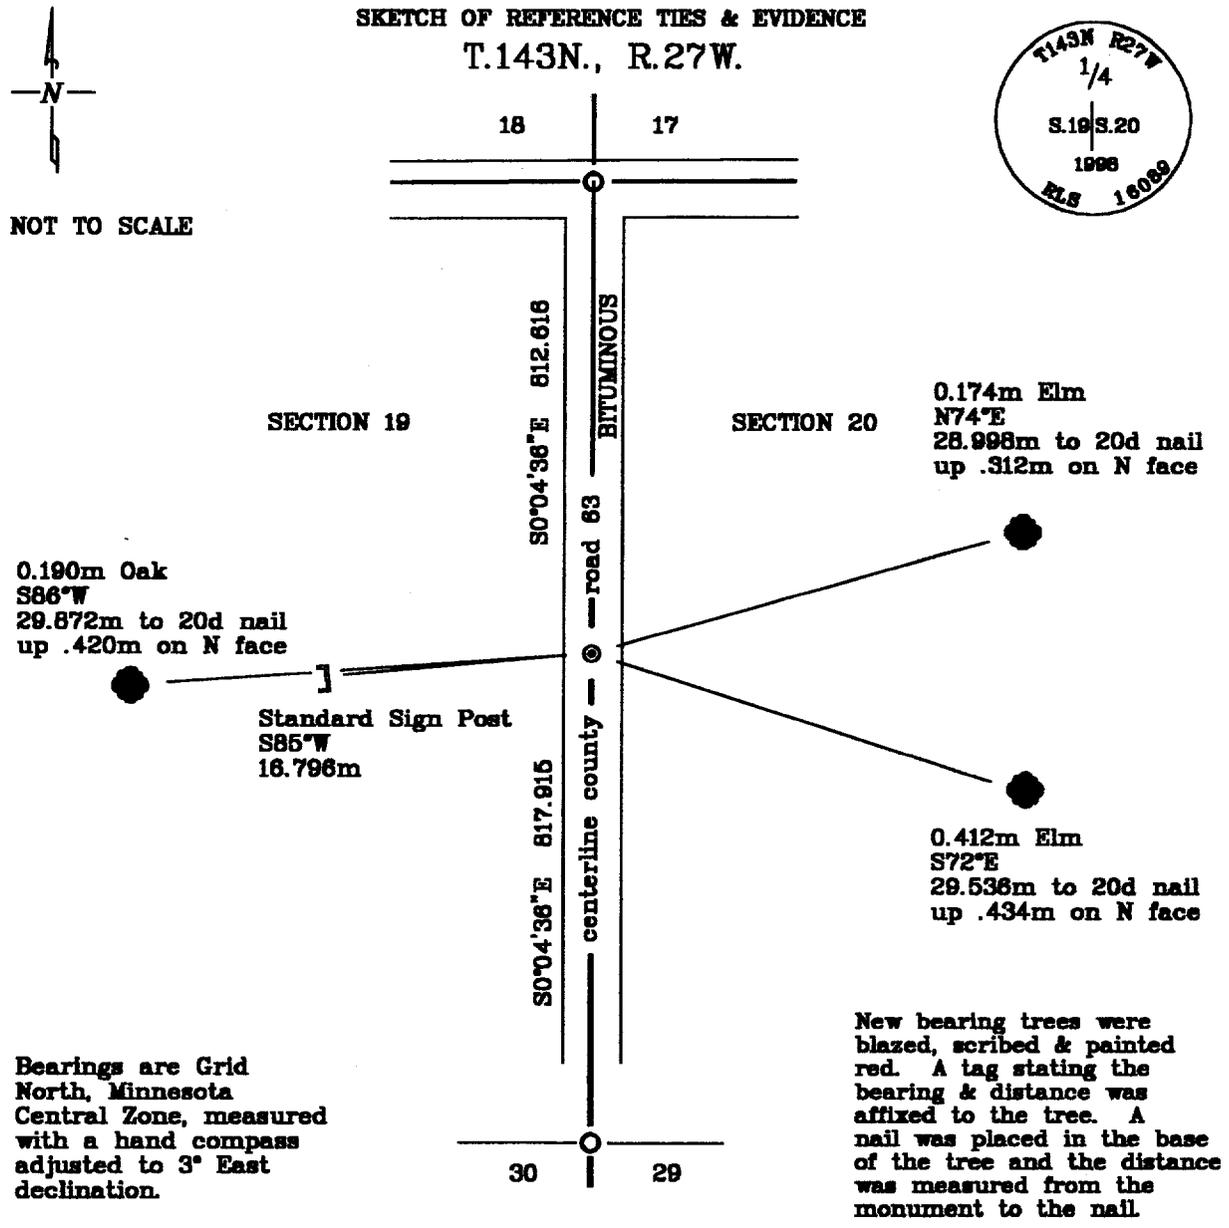

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Ledelling 4-24-1999
 LaVerne Ledelling Date
 Licensed Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412252
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:30 P.M. Date: 4-29-99
 Recorder Claudine Kaylor
 By K.F. Deputy
 DOCUMENT NO. 412252

Statement of Evidence

East Quarter Corner, Section 19, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

5" (0.127m) Cedar	8" (0.203m) Cedar
S70°W	S80°E
7 Links (1.408m)	17 Links (3.420m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1920; County Survey Record Book "C", pp. 391-398; Ben Clark found an old cedar post, and set an iron post for the corner. No new ties were established. The corner was found on line between the northeast & southeast corners of section 19, but the distance was not a split. Specifically the distance to the northeast corner was 2668.0 feet & the distance to the southeast corner was 2685.4 feet.

1920; County Resurvey Plat "E-7"; E.B. Horst found an iron monument for the corner.

September 1, 1998; Northern Lights Surveying and Mapping, Inc., crew used GPS along certain field lines to help gain control for future corner search.

December 8, 1998; NLSM crew of Heinle and Carlson returned to site to set monument. Monument was set on line between the NE and SE of section 19 and proportionate to the the 1920 survey. They set a 0.015m diameter galvanized steel pipe 0.610m below the bituminous layer at the centerline of County Road 63 for the quarter corner. The following references were established:

0.174m Elm	0.412m Elm	0.190m Oak
N74°E	S72°E	S88°W
28.998m to 20d nail	29.536m to 20d nail	29.872m to 20d nail
up .312m on N face	up .434m on N face	up .420m on N face
Standard Sign Post		
S85°W		
16.796m		

Also placed PK's at : 3' North and 3' South of corner.

Coordinates:

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Cass County North

Northing = 73351.701 meters
Easting = 158503.381 meters

Northing = 343,340.028 meters
Easting = 808,629.220 meters

Latitude = 47°11'21".10307 North
Longitude = 94°08'10".11279 West