


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 3, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

November 20, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM), set an aluminum capped, aluminum rod for the section corner based on calculations from the Army Corps of Engineers (COE), and their reference to an old logging road which is still plainly visible. The COE had found the original Government bearing trees.

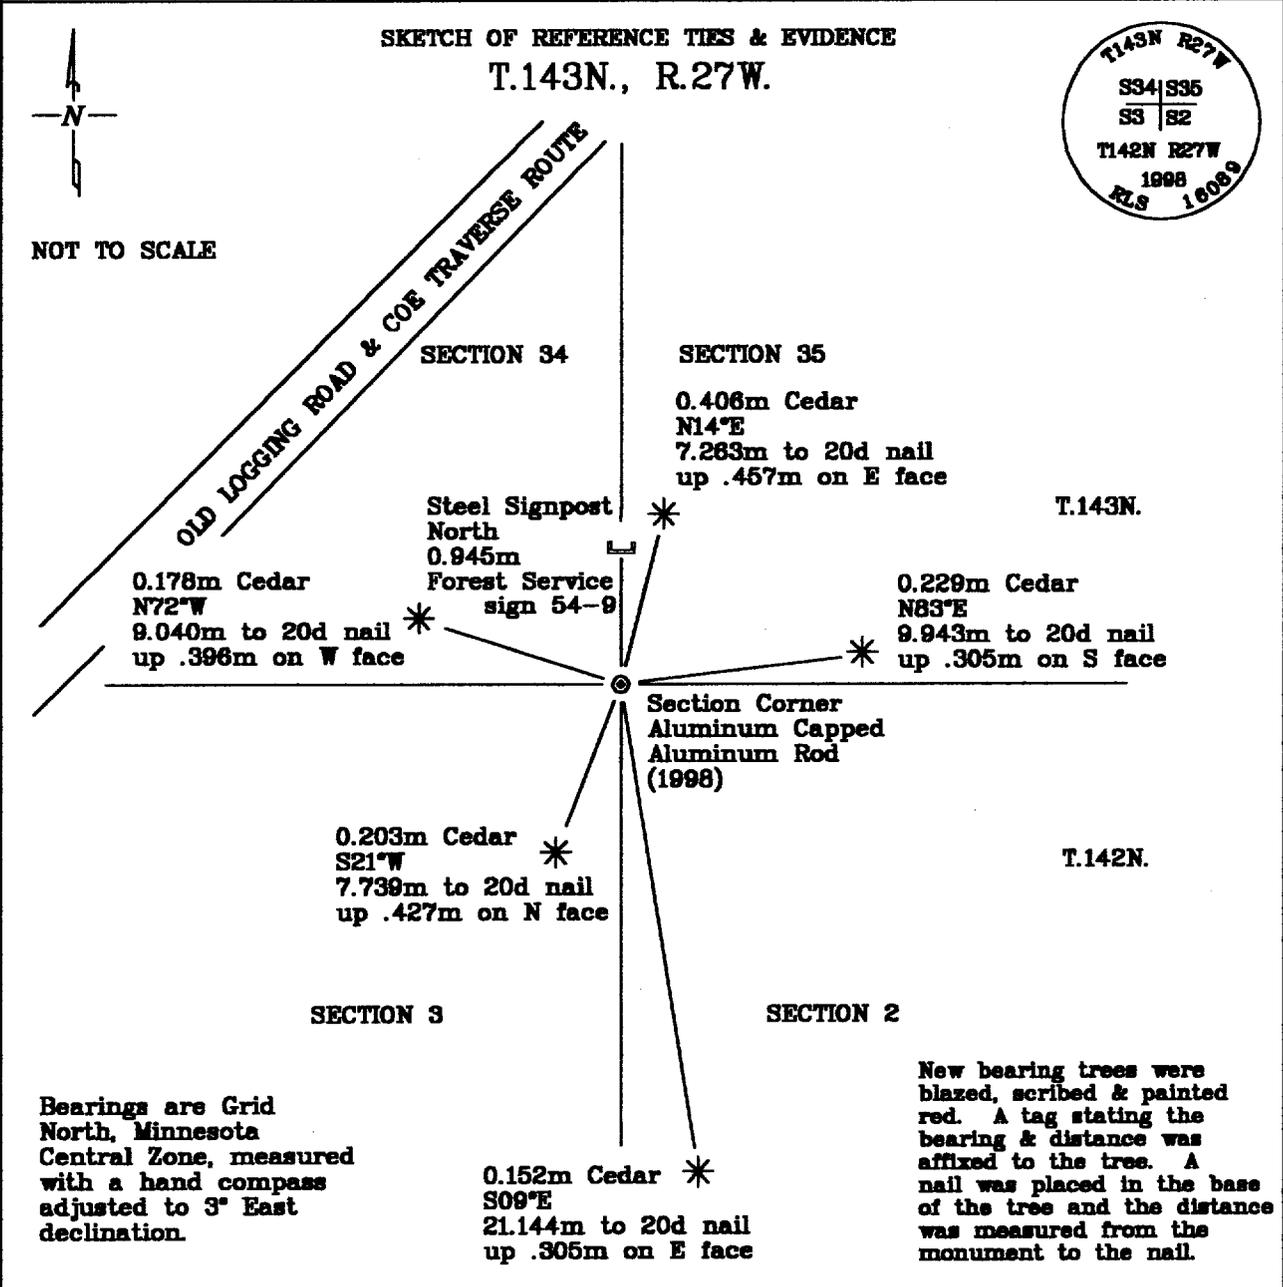

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Laverne Letelling
Laverne Letelling
Date 4-24-1999
Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412254
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:40 P.M. Date: 4-29-99
Recorder Claudine Kaylor
By K.F. Deputy
DOCUMENT NO. 412254

Statement of Evidence

Page 2 of 2

Northeast Corner, Section 3, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor P.H.Conger set a wooden post for the Section corner and referenced it with the following:

6"(0.152m) Tamarack	7"(0.178m) Cedar	7"(0.178m) Cedar
S09°W	N67°E	S55°E
13 Links (2.615m)	5 Links (1.006m)	13 Links (2.615m)

8"(0.203m) Tamarack
N54°W
9 Links (1.811m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

April 1, 1903; R.C. Smith of the Army Corps of Engineers, Book 355, p.55, found two 5" Cedar bearing trees, they were both alive and plainly marked. They also found other Cedar trees that were down and rotted. The corner fell 34m ± southeast of a long, straight ice road which was used as a traverse route by the Corps. Stadia measurements placed the corner 1627.2m east of the SW corner of Section 34 and 817.9m from the S 1/4 of Section 34.

October 15, 1998; Northern Lights Surveying and Mapping, Inc., crew of Foster and Heinle cruised 2640' (804.674m) east from search points at the south quarter of section 34 position. They then established two GPS search points and made an initial search for G.L.O. evidence. None was found at this time.

October 21, 1998; NLSM crew of Foster and Brunner made secondary search and established two new GPS points near the logging road and located its position. Meanwhile, Heinle and Leuelling located the other end of the ice road at its intersection with the Soo Line tracks.

November 20, 1998; NLSM crew of Leuelling and Heinle returned to site to set the monument based on the calculations from the Army Corps of Engineers, and their reference to the old logging road which was still plainly visible. The crew set a 0.019m diameter aluminum rod, 2.422m long, with a stamped 0.083m diameter aluminum cap. The monument was driven 2.120m into a cedar swamp, and the following references were then established:

0.406m Cedar	0.229m Cedar	0.178m Cedar
N14°E	N83°E	N72°W
7.263m to 20d nail	9.943m to 20d nail	9.040m to 20d nail
up .457m on East face	up .305m on South face	up .396m on West face
0.203m Cedar	0.152m Cedar	Steel Signpost
S21°W	S09°E	North
7.739m to 20d nail	21.144m to 20d nail	0.945m
up .427m on North face	up .305m on East face	Forest Service sign 54-9

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p.72.

Coordinates:

Cass County North

Northing = 69228.041 meters
Easting = 183347.288 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 339,218.454 meters
Easting = 813,474.823 meters

Latitude = 47°09'07".35511 North
Longitude = 94°04'20".39635 West