


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 21, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

November, 1998, Northern Lights Surveying and Mapping, Inc. monumented the quarter corner as a perpetuation of the original General Land Office (G.L.O.) survey.

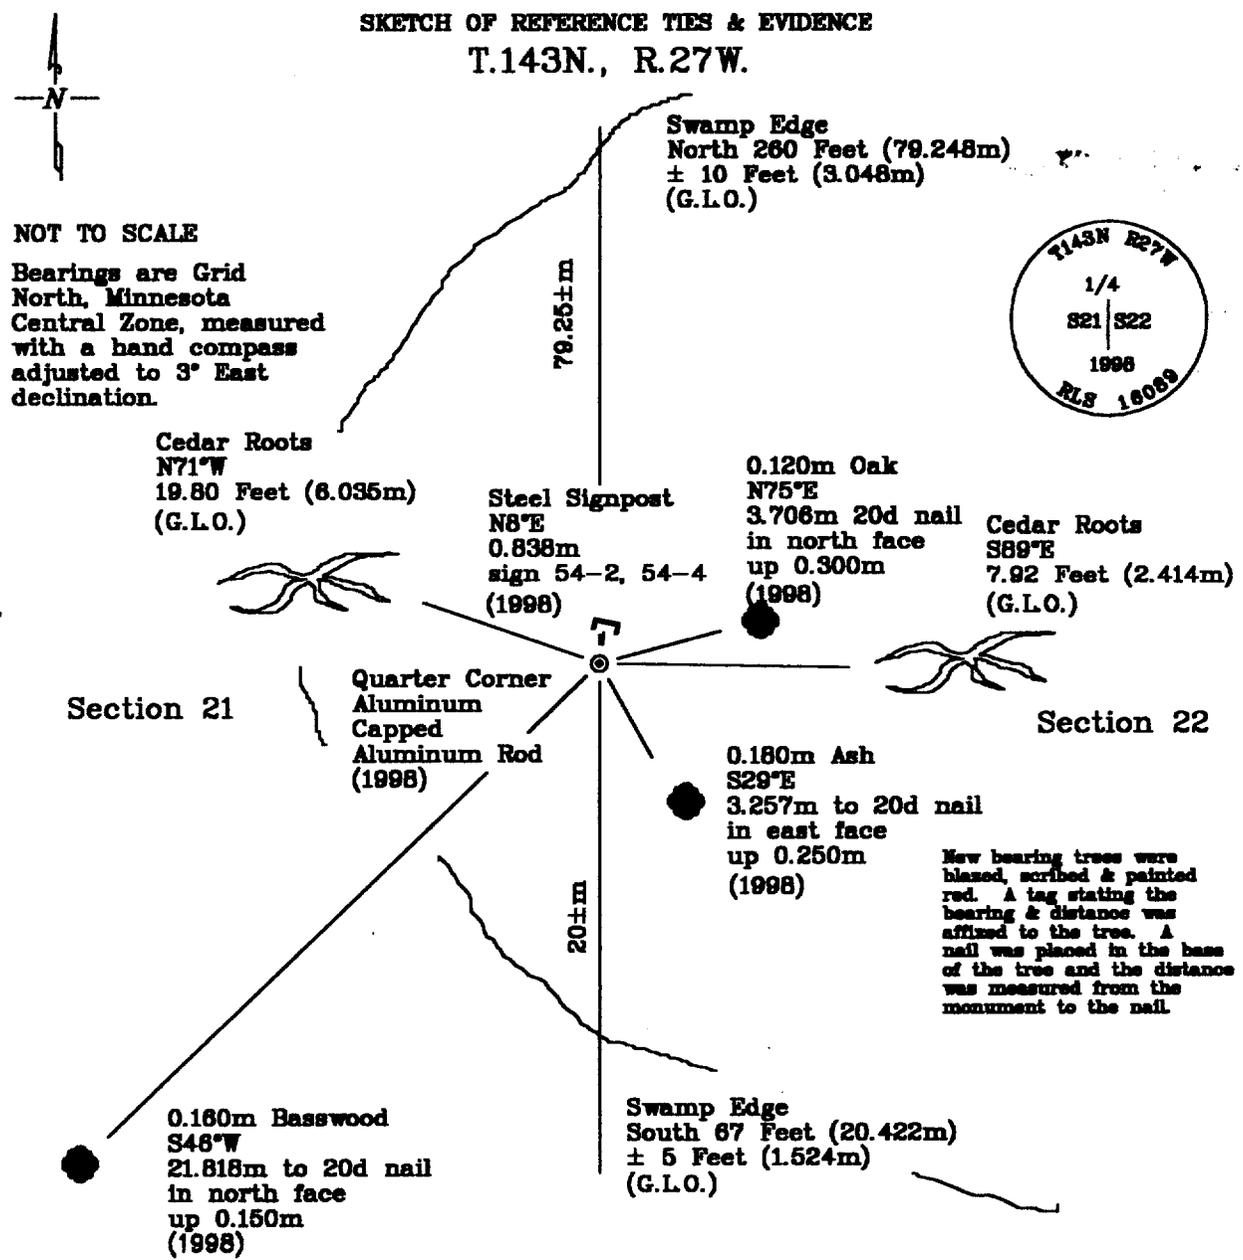

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 5-13-99
Date

LaVerne Leuelling Date
Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412850
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 11:45 A.M. Date: May 17, 1999
Recorder Claudine Kaylor
By K.F. Deputy
DOCUMENT NO. 412850

Statement of Evidence

East Quarter Corner, Section 21, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; G.L.O. survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

10" (0.254m) Cedar N88°W 30 Links (8.035m)	12" (0.305m) Cedar S89°E 12 Links (2.414m)	Swamp edge north 4 chains Swamp edge south 1 chain
--	--	---

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1969; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N. R.27W. Field Book #1, p. 41; Curt Krause searched the area and found it to be heavily burned over. He found large burned cedar stumps in an old telephone clearing line, but no marks on them. He indicated that the original land ties fit well.

November, 1998; Northern Lights Surveying and Mapping, Inc. crew chief Robyn Heinle, using Novatel GPS equipment, cruised north from the southeast corner of Section 21 to gain control. She ran a GPS session at the approximate corner location. She also searched the area and found the cedar stumps, which seemed to fit the record bearing and distance. Later in the month, she and LaVerne Leuelling returned to the corner position, re-checked the cedar stump distance/bearing, and also found swamp calls from original notes north and south. These were noted as the following:

Cedar Roots N71°W 19.80 Feet (6.035m)	Cedar Roots S89°E 7.92 Feet (2.414m)	Swamp Edge South 67 Feet (20.422m) ± 5 Feet (1.524m)	Swamp Edge North 260 Feet (79.248m) ± 10 Feet (3.048m)
---	--	--	--

Well rotted wood fibers were found at the corner position.

They set a 0.019m diameter aluminum rod with a 0.083m diameter aluminum stamped cap, 1.829m long, for the quarter corner and established the following references:

0.120m Oak N75°E 3.706m 20d nail in north face up 0.300m	0.180m Ash S29°E 3.257m to 20d nail in east face up 0.250m	0.160m Basswood S46°W 21.818m to 20d nail in north face up 0.150m	Steel Signpost N6°E 0.838m sign 54-2, 54-4
--	--	---	---

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #2, p. 57.

Coordinates:

Cass County North

Northing =73276.683 meters
Easting =161691.681 meters

**State Plane Coordinate System
Minnesota Central Zone
NAD 83**

Northing =343266.301 meters
Easting =811817.458 meters

Latitude =47°11'18".53994 North
Longitude =94°05'38".87899 West