


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner Section 26, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

Northern Lights Surveying and Mapping, Inc.(NLSM) set a galvanized steel pipe for the corner position based on testimony given by a local resident as to the location of a 1940 corner tag on an Aspen and on an old fence line.

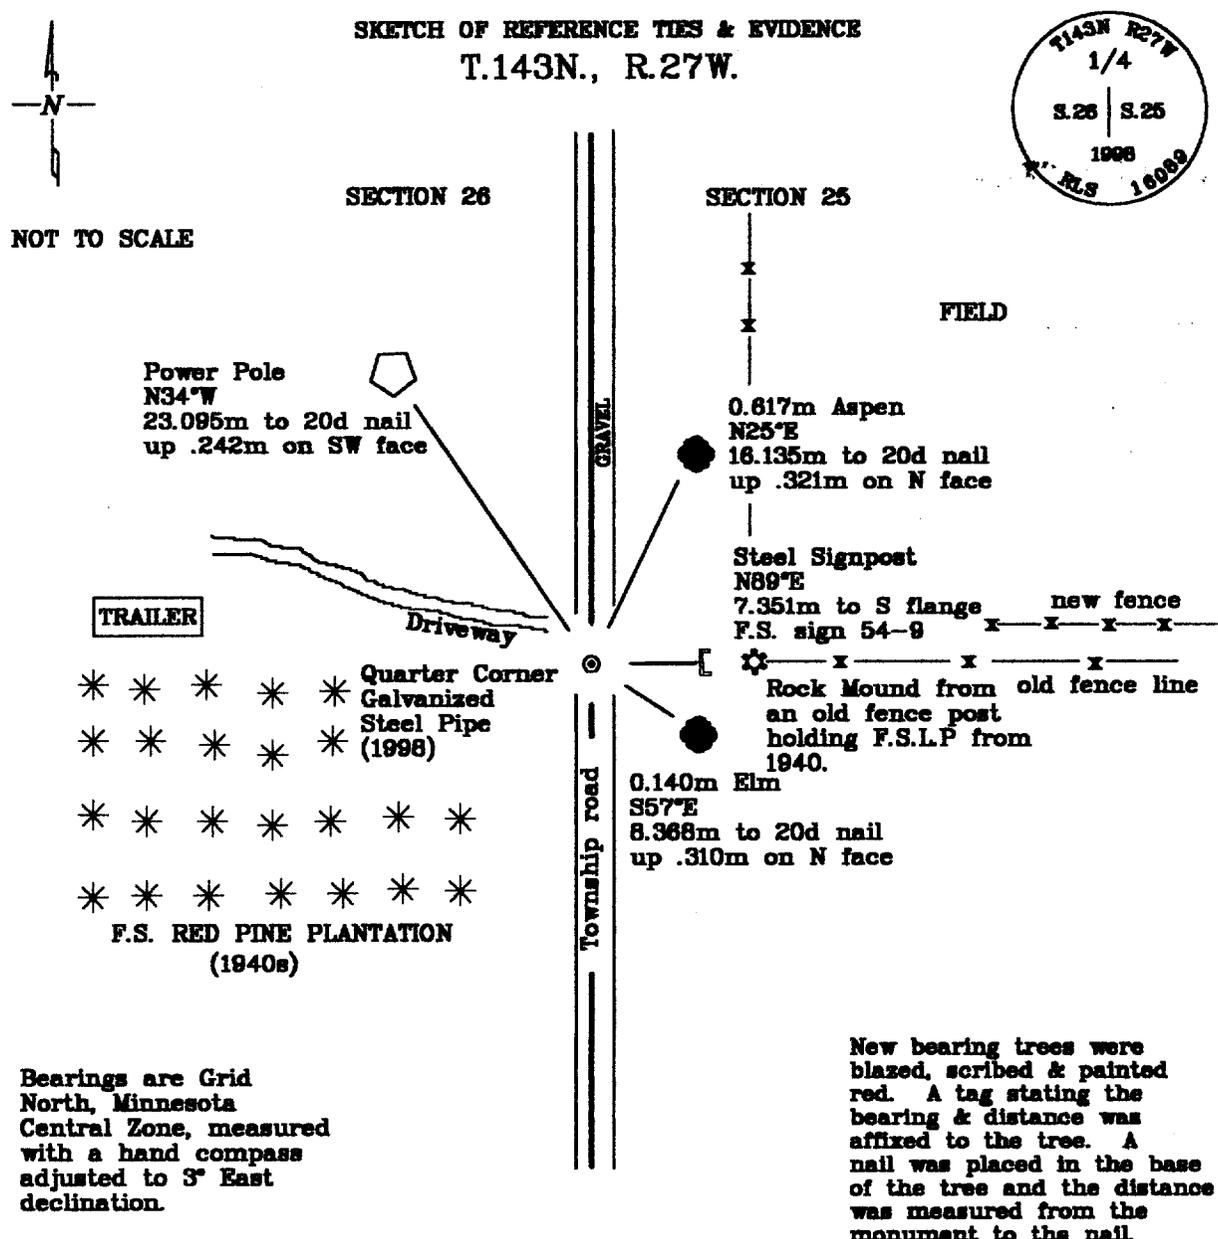

NOT TO SCALE

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Beuelling 5-13-99
 LaVerne Beuelling Date
 Licensed Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412860
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:35 P.M. Date: May 17, 1999
 Recorder Claudine Kaylor
 By K.F. Deputy
 DOCUMENT NO. 412860

East Quarter Corner Section 26, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September 1873; General Land Office (G.L.O.), Deputy Surveyor William Allen set a wood post for the corner and referenced it with the following:

6"(0.152m) Aspen	10"(0.254m) Birch
N55°W	S40°E
8 Links (1.609m)	5 Links (1.006m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1915; Cass County Survey Record #328, Book "B", p.456-462; the west line of section 25 was measured 5128.2' (465.796m); the quarter corner was not shown.

October 1940; United States Forest Service Form 874; R.T. DeFant found:

10"(0.254m) Pine stump
East
46 Links (9.254m)

He put a location poster on west side of:
3"(0.076m) Aspen
East
46 Links (9.254m)

He noted that the corner was in the centerline of north-south running road. He questioned the authenticity of the corner, stating that it was a "company" corner.

November 1969; United States Department of Agriculture-Forest Service (USDA-FS) T.143N. R. 27W. Field Book #1, p. 6; Curt Krause found the point of a rotted stake at the end of a fence. He also found a pine stump 46 Links (9.2545m) from the centerline of a road, as reported by DeFant. He could not find the Aspen or location poster.

January 1993; USDA-FS T.143N. R.27W. Field Book #1, p.6; Curt Krause and crew drove to the area of the corner and found a fence line N88°E at 2677' (815.951m) north of the centerline of County Road #4. A telephone pedestal was on the west side of the road and measured 2653' (808.636m) from Co. Rd. #4. They noted a red pine stand to the southwest; the Walker district believed there was a trespass (a trailer house and septic system) west of the road.

October 1, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) crew of Leuelling and Heins received testimony from an 87 year old local resident, Leonard (Guy) Robbins. At the West Quarter of Section 25, Mr. Robbins pointed out a post, which had a yellow tag on it. That tag dated from the time of the Forest Service plantation creation. At that time the post was the southwest corner of a field. The field fence was moved 20'± north in the mid 1970's. Remnants of the old fence are clearly visible. Mr. Robbins stated that the south line of the northeast 1/4 of Section 26 was fenced by him to the line created by the Forest Service Plantation in the 1940's.

December 15, 1998; NLSM crew set a brass capped 0.015m diameter galvanized steel pipe, 0.610m long for the quarter corner. It was set in the centerline of section line road and in accordance with DeFant's found tag. In the absence of a direct claim of evidence leading to the General Land Office corner, this position was accepted as a long standing (60+ years) corner of local control.

The following references were then established:

0.617m Aspen	0.140m Elm	Power Pole	Steel Signpost
N25°E	S57°E	NS4°W	N89°E
16.135m to 20d nail	8.366m to 20d nail	23.095m to 20d nail	7.351m to S flange
up .321m on N face	up .310m on N face	up .242m on SW face	F.S. sign 54-9

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #3, p. 51.

Coordinates:

Cass County North

Northing = 71708.666 meters
Easting = 164943.376 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 341,699.624 meters
Easting = 815,069.676 meters

Latitude = 47°10'27".57441 North
Longitude = 94°03'04".38825 West