


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner, Section 33, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 7, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) monumented the section corner as a perpetuation of the original General Land Office (G.L.O.) survey which was computed along with findings from the County and the Civilian Conservation Corps (CCC). An iron pin was found within 0.5 meters of the pre-calculated position and accepted as the best evidence for the General Land Office corner.

SKETCH OF REFERENCE TIES & EVIDENCE
T.143N., R.27W.



NOT TO SCALE

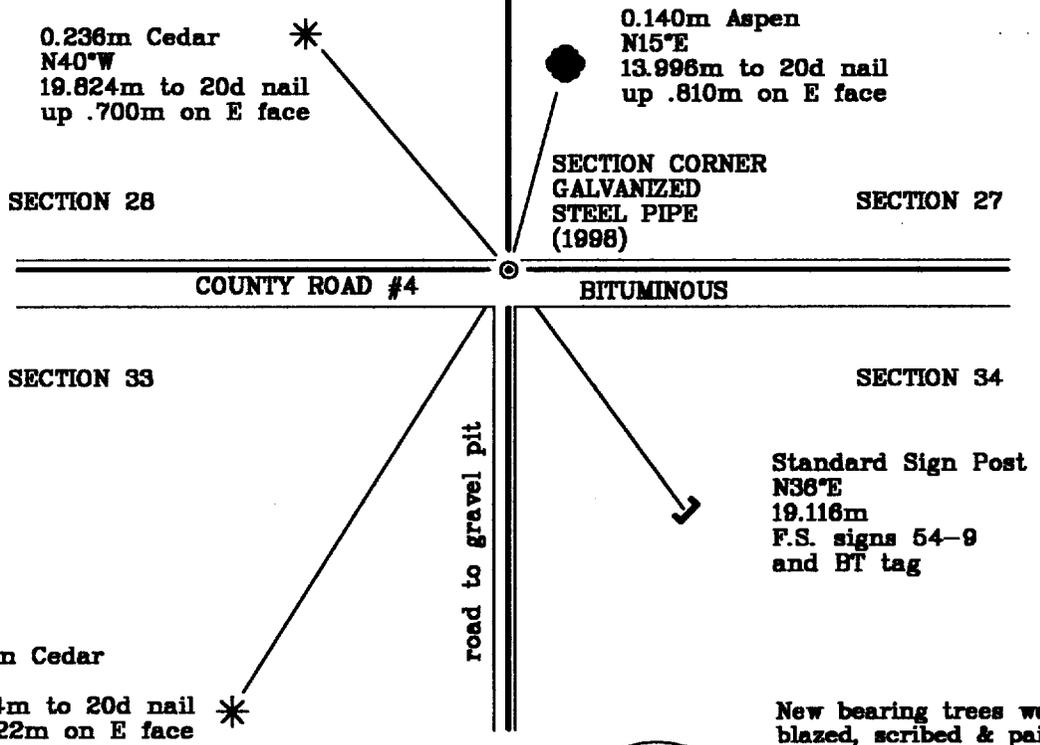

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.



New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling 5-13-99
LaVerne Leuelling Date

Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412861
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:40 P.M. Date: May 17, 1999

Recorder Claudine Kaylor

By K.F. Deputy

DOCUMENT NO. 412861

Statement of Evidence

Northeast Corner, Section 33, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the section corner and referenced it with the following:

8" (0.152m) Tamarack S46°W 32 Links (6.437m)	7" (0.178m) Cedar N68°E 13 Links (2.615m)	12" (0.305m) White Pine N79°W 12 Links (2.414m)
--	---	---

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

February, 1915; Cass County Record Book "B" - Survey Record #328, pp. 456-462; Curo and Donner found the original Cedar bearing tree, down and plainly marked, and set a 60d spike for the corner. They marked the following as references:

8" (0.203m) Dry Stub N4°49'W 52.20 Feet (15.911m)	14" (0.356m) Dry Stub N39°15'E 73.40 Feet (22.372m)	8" (0.203m) Dry Stub S37°26'W 6.90 Feet (2.103m)
---	---	--

The distance to the N1/4 33 was 2648 and the distance to the N1/4 34 was 2679.9 feet.

February, 1937; United States Forest Service-Civilian Conservation Corps surveyor J.A. Gjelhaug noted in USFS-CCC Bk # 88, used the intersection of county road #4 and south running road for the NE corner position of section 33. It was also found that his distances on the north line of section 33 were essentially the same as what the county had recorded. He showed the corner to be 40.31 chains (2680.46 feet) from the N1/4 33 and 39.91 chains (2634.06 feet) from the E1/4 of section 33.

August, 1997; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N R.27W. Field Book #1, p. 36; R. Main and C. Krause occupied a pin at the intersection of County Road #4 and a township road to the south as a GPS position.

December 12, 1998; Northern Lights Surveying and Mapping, Inc., set monument computed by a best fit calculated position based on the traverse by Gjelhaug in 1937, and the survey done by the county in 1915. The position was a perpetuation of the original General Land Office survey through the work of the county and Gjelhaug. NLSM set a brass capped 0.015m diameter galvanized steel pipe, 0.610 long, below the bituminous, north of the centerline of county road #4, and in line with a road running to the south. The following references were then established:

0.236m Cedar N40°W 19.824m to 20d nail up .700m on E face	0.140m Aspen N15°E 13.996m to 20d nail up .610m on E face	Standard Sign Post N36°E 19.116m F.S. signs 54-9 and BT tag
	0.268m Cedar S32°W 33.854m to 20d nail up .822m on E face	

Also placed PK's in bituminous as additional ties: 2' North and 2' East

The distance to the N1/4 of Section 33 was 808.109 meters (2651.27 feet).
The distance to the N1/4 of Section 34 was 817.262 meters (2681.30 feet).
The distance to the E1/4 of Section 33 was 801.379 meters (2629.19 feet).

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p. 1.

Coordinates:

Cass County North

Northing = 70869.213 meters
Easting = 161896.190 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340,858.909 meters
Easting = 811,822.932 meters
Latitude = 47°10'00.58695" North
Longitude = 94°05'38.64410" West