


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner, Section 2, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

November 4, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) set a galvanized steel pipe with a brass cap for the section corner based on evidence found that was left by the Civilian Conservation Corps (C.C.C.) in 1939, and on the testimony given to Curt Krause from a local resident in 1969.

SKETCH OF REFERENCE TIES & EVIDENCE


T.143N., R.27W.



SECTION 35

SECTION 36

NOT TO SCALE

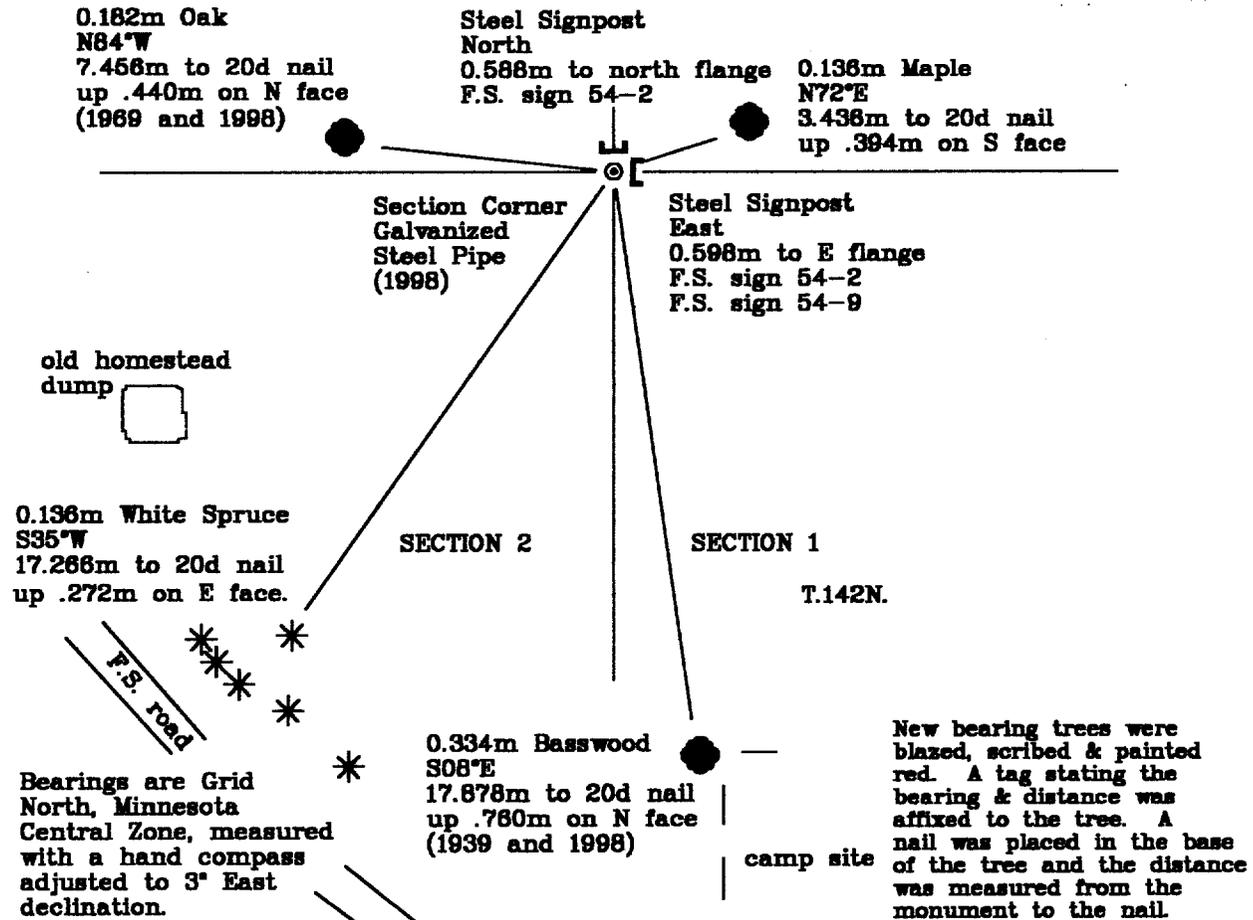

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling
Date 5-20-99

Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 413181
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 4:10 P.M. Date: May 25, 1999

Recorder Claudine Kaylor

By K.F. Deputy

DOCUMENT NO. 413181

Statement of Evidence

Page 2 of 3

Northeast Corner, Section 2, Township 142 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873; General Land Office (G.L.O.) survey notes: Deputy Surveyor P.H. Conger set a wooden post for the section corner and referenced it with the following:

8"(.203m) Birch	8"(.203m) Fir	6"(.152m) Fir	8"(.152m) Maple
S51°W	N13°W	N32°E	S62°E
39 Links (7.846m)	23 Links (4.627m)	24 Links (4.828m)	18 Links (3.621m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1915; County Resurvey - Survey Record #328, Book B, p.459; Engineer Donner found the northeast and southwest bearing trees marked and standing. Donner set a 4"x 4"x 48" cedar post to mark the corner

1935; Civilian Conservation Corps (CCC) Notes Remer File - found a wood post in poor condition 14" above ground with a Forest Service Location Poster (FSLP) on a 3" Basswood on the north side of the tree N10°W 88 Links to the corner.

August 11, 1939; Civilian Conservation Corps, form #874 by B.E.Lyons found a squared post 2 1/2" above ground, badly rotted. He also found:

4 1/2"(.114m) Basswood
N10°W
88 Links (17.703m)

The Basswood also had a FSLP on the north side of the tree. The corner is on the edge of a clearing to the southwest and Aspen on the other side.

October 27, 1969; United States Department of Agriculture-Forest Service, Corner Restoration Book #2 T.142N. R.27W., p. 17; Local resident took Curtis Krause to the approximate corner location. He found a F.S.L.P. on a 12" Basswood and recorded the bearing and distance. He searched for the corner, but found no remains of a post. The area had 3"-4" of burned ash and decay.

October, 1998; Northern Lights Surveying and Mapping, Inc. crew of Leuelling and Heinle visited the approximate location based on a testimony by Curt Krause. In searching there was a .334m Basswood with two scars that appeared to be from the C.C.C. location poster from 1939. In one of the scars, 2 small nails were found from the 1939 FSLP.

November 4, 1998; NLSM Crew of Heinle and Brunner revisited site and set the corner based on the testimony from Curt Krause and the Basswood. The crew also found another location tag, this one by Curt Krause. The corner was monumented with a 0.015m diameter, 1.219m long galvanized steel pipe and a brass cap, up .172m from the ground. The following references were then established:

0.182m Oak	0.136m Maple	0.334m Basswood
N84°W	N72°E	S08°E
7.456m to 20d nail	3.436m to 20d nail	17.878m to 20d nail
up .440m on N face	up .394m on S face	up .760m on N face
(1969 and 1998)		(1939 and 1998)
0.136m White Spruce	Steel Signpost	Steel Signpost
S35°W	East	North
17.266m to 20d nail	0.598m to E flange	0.588m to north flange
up .272m on E face.	F.S. sign 54-2	F.S. sign 54-2
	F.S. sign 54-9	

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #4, p.76.

Coordinates:

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Cass County North

Northing = 339,312.947 meters
Easting = 815,083.244 meters

Northing = 69321.901 meters
Easting = 164956.005 meters

Latitude = 47°09'10.29105" North
Longitude = 94°03'04.02853" West