

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 140, Range 28, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

On 3/1/00 found a 2" I.D. IRON PIPE
DATE


left monument as found, lowered monument, removed monument (explain)

On 10/25/00 Placed a PK 7.02' NORTH OF THE CLOSING CORNER FOR THE
DATE
ACTUAL SECTION CORNER, 6' NORTH OF CL

SKETCH OF REFERENCE TIES



- ⊙ TOP SW CORNER ELECTRICAL JUNCTION BOX
- ⊙ TOP NE CORNER ELECTRICAL JUNCTION BOX

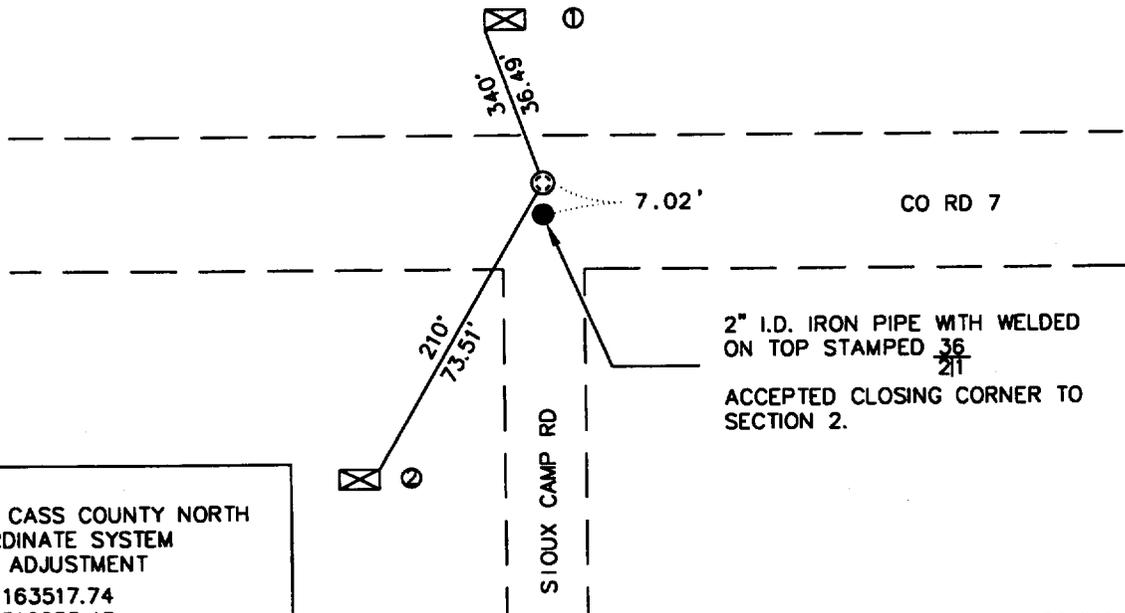

1983 CASS COUNTY NORTH
COORDINATE SYSTEM
1996 ADJUSTMENT
N = 163517.74
E = 510655.43

2" I.D. IRON PIPE WITH WELDED
ON TOP STAMPED 36
21
ACCEPTED CLOSING CORNER TO
SECTION 2.

AZIMUTHS ARE OBSERVED WITH A COMPASS

Statement of evidence relative to this corner location is on back of page.

11/9/00
FOM01869

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 11/02/00
SIGNATURE DATE

License Number 16098

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER # 430971
County of Cass

I hereby certify that this document was filed in the Co. Recorders Office at 2:20 P. M. on the 28th day of Nov. A.D., 2000

County Recorder Claudine Kaylor for
By _____, Deputy

DOCUMENT NO. 430971

Northeast Corner Section 2, Township 140 North, Range 28 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Surveyor
 Widseth, Smith and Nolting of Brainerd
 Landecker and Associates of Pequot Lakes
 Landecker and Associates of Walker
 Central Minnesota Surveying
 AMI Surveyors and Mappers

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be the closing corner marked with a post and the following bearing trees were marked:

Cedar 5" S 20° W 12 links (7.92')
 Spruce 6" S 50° E 14 links (9.24')

The corner is 8.74 chains(576.84') east of the Southwest Corner Section 36.

1926 Ben Clark found an iron post and both original Govt. bearing trees.

1941 Civilian Conservation Corp. set approximate corner 5280' from south.

1953 Co. Hwy Dept. shows iron pipe inplace for the corner.

? AMI in a letter to the DNR state that they had used this corner.

2000 In May, the DNR survey crew found a 2" capped iron pipe, top stamped 36-1-2, which has been used for the closing corner.

In October, the DNR survey crew established a point on the Township line between the SW Corner and the South Quarter Corner S36, T141, R28W and on line between the East Quarter and iron pipe closing corner of Section 2. Set a PK nail at this position 7.02'

North of closing corner. Measured as follows:

East Quarter Corner Section 2	S 00°15'05" E 2554.45'
Southwest Corner Section 36	N 88°54'27"W 544.43'
South Quarter Corner Section 36	S 88°54'27" E 2084.79'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401