

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 23, Township 135 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 12/1/98 found a 1 1/2" inside Diameter Iron Pipe, up 0.6' with S.F. Posts  
DATE  
On north: west side. Iron Pipe Painted Orange  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE

SKETCH OF REFERENCE TIES

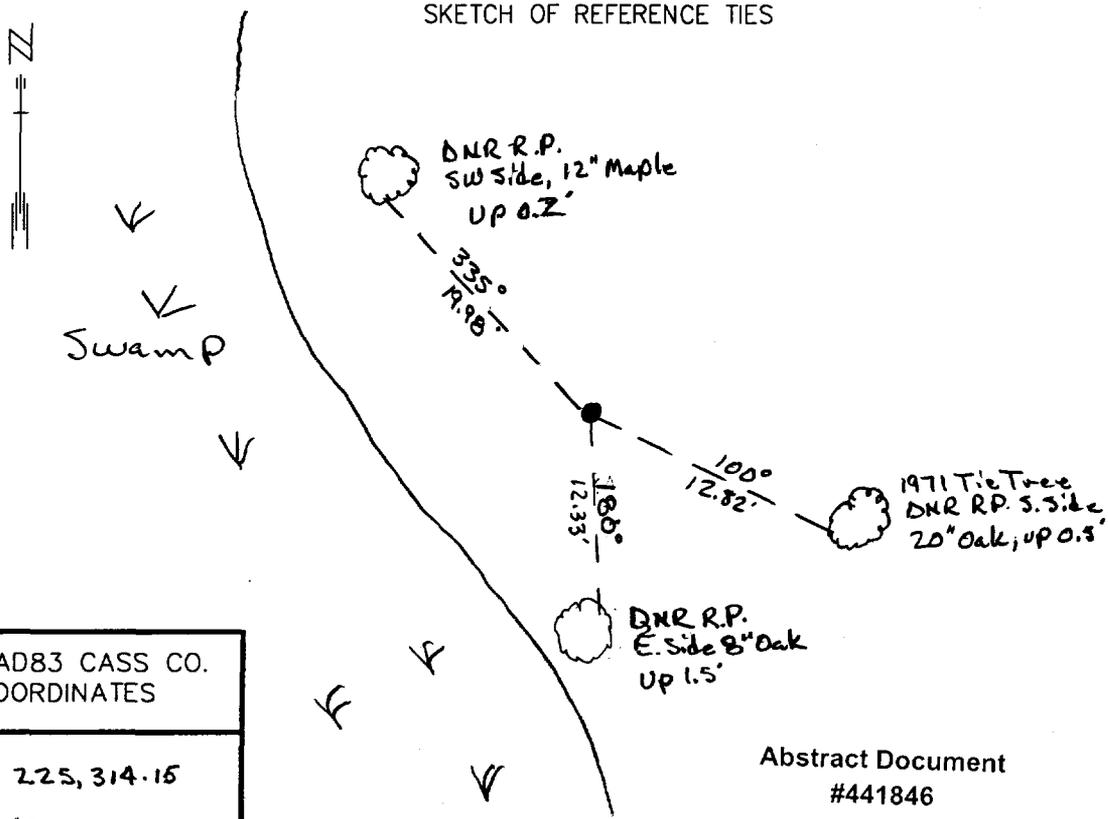

NAD83 CASS CO.  
COORDINATES

N 225,314.15

E 481,388.89

Abstract Document  
#441846

Azimuths observed with Compass

Statement of evidence relative to this corner location is on back of page.

DATE 11/29/99  
FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 5/31/01  
SIGNATURE DATE

License Number 16098

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:32 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Narby  
By John F. Naeth, Deputy  
DOCUMENT NO. 441846

**Northeast Corner Section 23, Township 135 North, Range 31 West**

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State  
Cass County Surveyor  
Widseth, Smith and Nolting of Brainerd  
Landecker and Associates of Pequot Lakes  
Landecker and Associates of Walker  
Central Minnesota Surveying

1858 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

W. Pine 20" N 36° W 26 links  
W. Pine 16" N 18° E 18 links  
W. Pine 22" S 10° E 15 links  
W. Pine 15" S 76° W 19 links

1920 Lincoln Mackey surveyed the Rainbow Trail through this township. He found all four stumps of the original bearing trees and set a 2" x 48" iron monument. He measured 5365.47' to the northeast corner section 24 and 5237.1' to the northeast corner section 22. He took the following new ties:

Poplar 8" N 74 1/2° W 118.1'  
Poplar 10" S 27° W 162.5'  
Poplar 6" N 52° E 72.5'  
Poplar 7" N 16° E 54.0'

1971 Donald Coulter worked on sections 10 - 15 for a plat of Wilderness Park. He shows a 2" iron pipe for the corner and took ties to two oaks, a maple and a birch.. He measured 5363.47' to the northeast corner section 24 and 5226.59' to the northeast corner section 22.

1998 The DNR survey crew found a 1 1/2" iron pipe, up 7" and one of the tie trees taken by Coulter. The iron pipe had been painted orange and had steel fence posts on the north and east sides. None of the trees marked by Mackey were found. The iron pipe was accepted as marking the original location of the corner. We measured 5366.04' to the northeast corner section 24 and 5227.44' to the northeast corner section 22.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425