

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 28, Township 134 N, Range 31 W, 5TH P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 6-3-98 Placed a DSM DOWN 0.3' ON E OLD N-S GRAVEL ROAD
DATE ON FENCE EAST.

SKETCH OF REFERENCE TIES

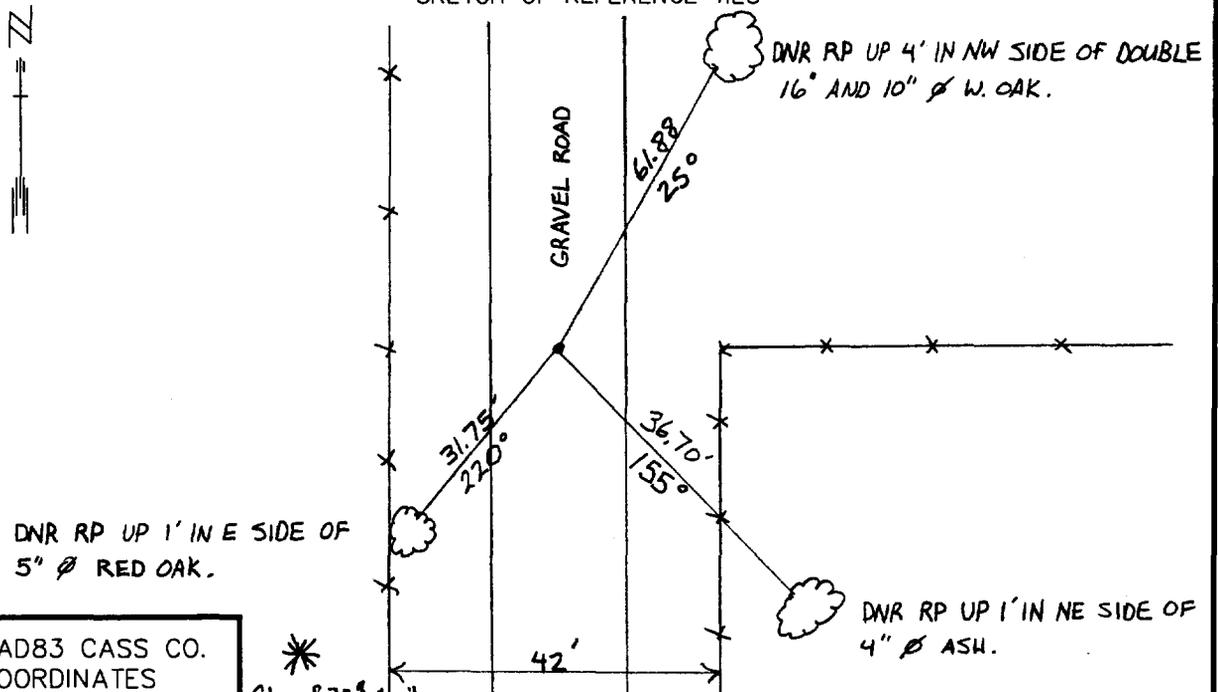

NAD83 CASS CO. COORDINATES

N 217,421.89

E 470,932.12

* Ctr. of 30 White Pine
220°
58.9'

Abstract Document #441857

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page. DATE FILE WMA01198

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 5/31/01
SIGNATURE DATE

License Number 16098

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. recorders office at 2:54 P.M. on the 16th day of Oct. A.D., 2001

County Recorder Kathryn M. Norley
By John C. Maeder, Deputy
DOCUMENT NO. 441857

East Quarter Corner Section 28, Township 135 North, Range 31 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Surveyor
Widseth, Smith and Nolting of Brainerd
Landecker and Associates of Pequot Lakes
Landecker and Associates of Walker
Central Minnesota Surveying

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

W. Pine 24" S 38 ½° W 31 links (20.46')

W. Pine 28" N 42° E 36 links (23.76')

1998 The DNR survey crew searched for the corner at the intersection of an old fence east and the centerline of an old north - south gravel road. Nothing was found. A spike was set in line with the fence east and the centerline of the road. The northeast corner of section 28 and the centerline of the old road and a fence line west at the approximate east sixteenth corner of the northeast quarter of section 28 were located. The split between the northeast corner and the spike set to mark the approximate east quarter corner fell in line with the sixteenth fence line west. The spike was removed and a 3/4" x 24" iron rod with a MNDNR SURVEY MARKER cap was set, down 4" to mark the obliterated location of this corner. The distance to the northeast corner of the section measures 2643.08' and to the southeast corner is 2660.62'.

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56425