


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

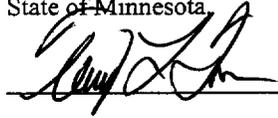

Date: 4/11/03 License No: 21367

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at 12:20 o'clock P.M. on the 17<sup>th</sup> day of April, 2003 A.D.

County Recorder Kathryn M Morby

By: dc, Deputy  
DOCUMENT NO. 465200

EAST QUARTER Corner of Section 31, Township 139, Range 29, 5TH P.M.

On 5/21/02 found a 2 1/4" GALV. IRON PIPE WITH BROKEN TOP DOWN 2"


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

decl: 5' EAST (ASSUMED)

## SKETCH OF REFERENCE TIES

Not to Scale

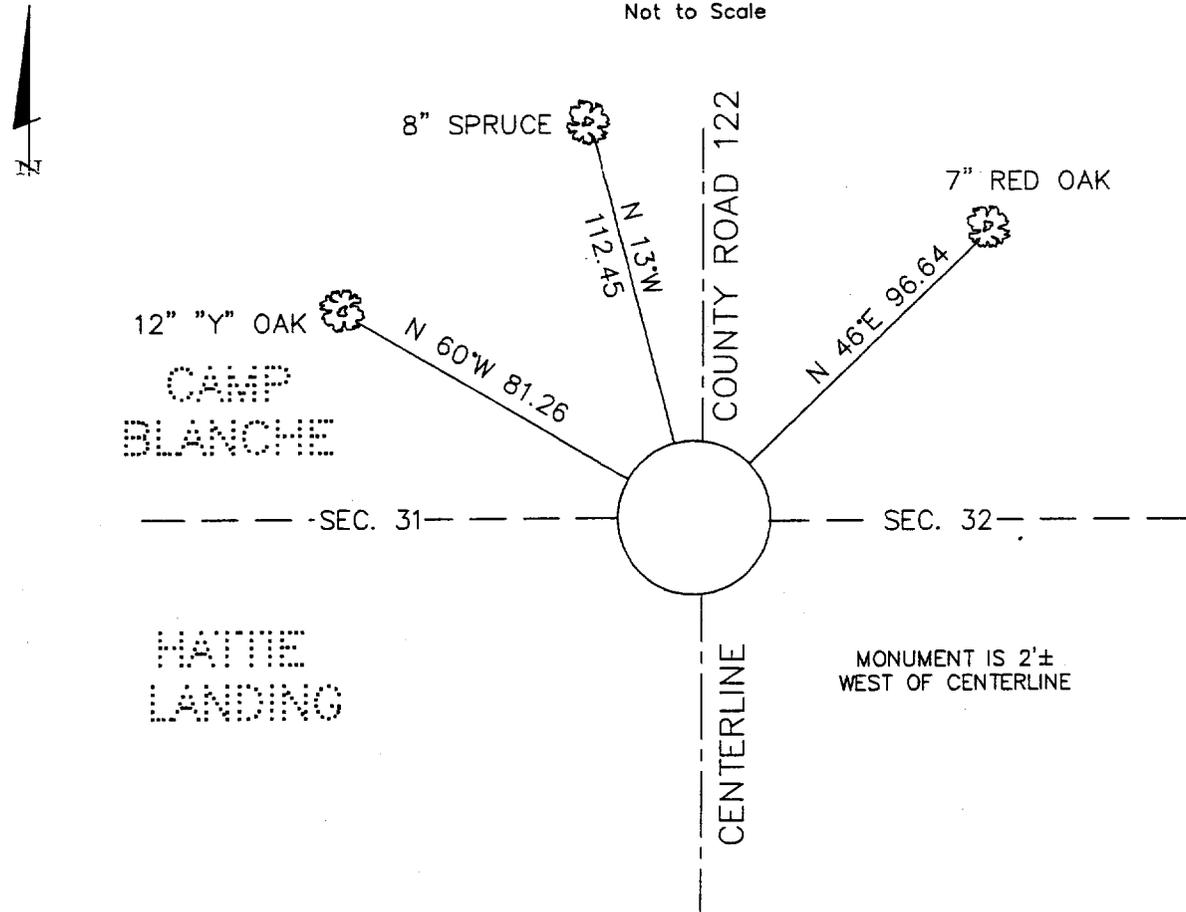

ALL DISTANCES ARE HORIZONTAL  
TO NAIL IN BASE OF BEARING TREE.

Statement of evidence for this corner position is on the back of this page

East Quarter, Section 31, Township 139 North,  
Range 29 West, Cass County, Minnesota

- 1865 Wright & Walker, U.S. Deputy Surveyors, originally established this corner position while surveying the interior subdivision line of Township 139 North, Range 29 West. A wood post was set to mark the corner position with the following witnesses: A Norway Pine, North 44 degrees West, 193 links; A Black Pine, North 44 degrees East, 194 links.
- 1914 County Survey Record Book "B", p. 354-360 shows a survey by H. F. Baldwin. He found no evidence of original corner. Set a 2 ¼ inch x 48 inch iron monument proportionally.
- 1915 Plat of Camp Blanche by John W. Curo. Plat shows 2 ¼ inch x 4 foot iron monument. Document #43301.
- 1979 Plat of Hatte Landing by Walter E. Curo. Plat shows found monument. Document #245793.
- 2002 May 21, a Landecker & Associates, Inc. survey crew while surveying in the plat of Camp Blanche found a 2 ¼ inch galvanized iron monument with broken top and accepts the corner as established by Baldwin in 1914 from which the following accessories: A 7 inch Red Oak, North 46 degrees East, 96.64 feet; A 12 inch Y Oak, North 60 degrees West, 81.26 feet; A 8 inch Spruce, North 13 degrees West, 112.45 feet.