



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Quarter Corner common to Section 1, Township 141 North, Range 30 West and Section 6, Township 141 North, Range 29 West, of the Fifth Principal Meridian, Cass County, Minnesota. The found GLO brasscapped has been accepted as the "Lost" Quarter Corner set properly by the GLO in 1917.

SKETCH OF REFERENCE TIES T 141 N, R 29-30 W



NOT TO SCALE

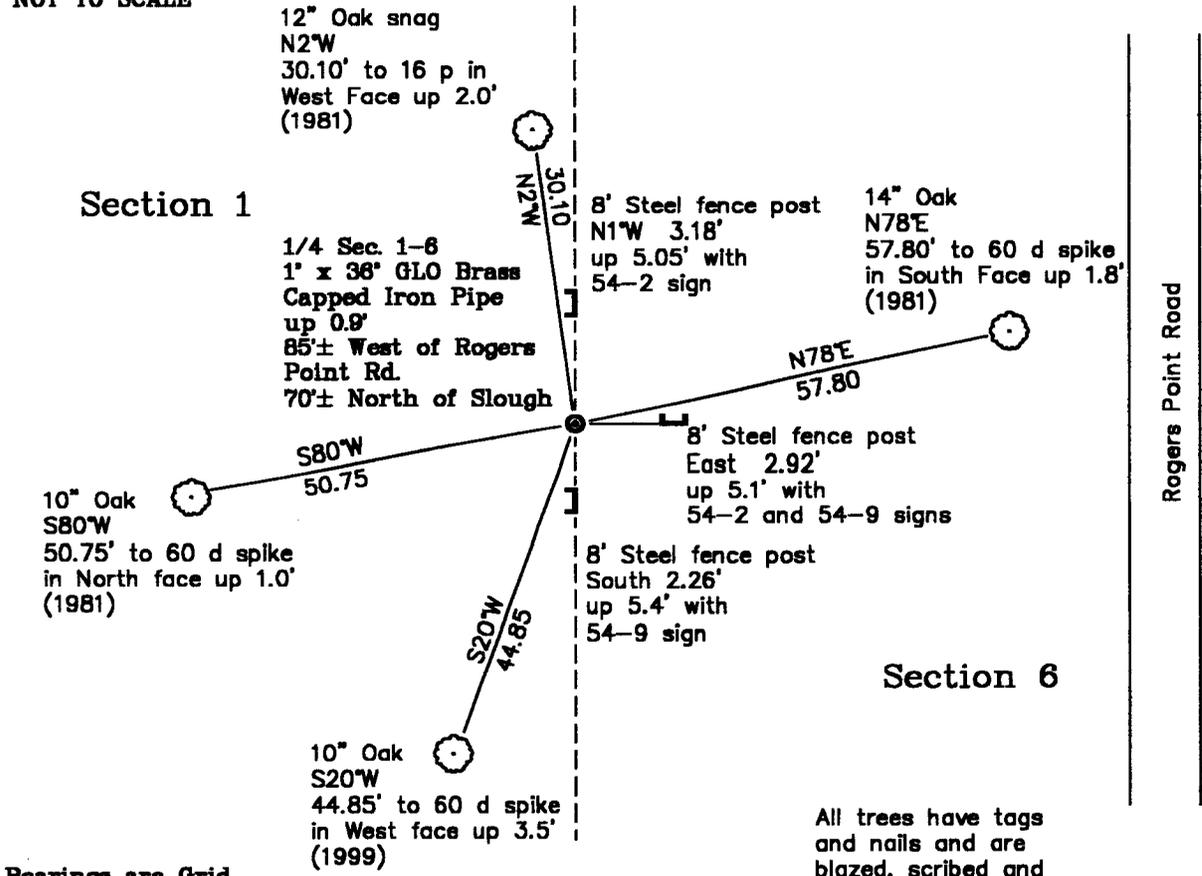

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

All trees have tags and nails and are blazed, scribed and painted red.

Abstract Document #480058

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuelling
LaVerne Leuelling Date 2-11-04
Licensed Land Surveyor No. 18089
Northern Lights Surveying & Mapping, Inc.

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 9:15 A.M. Date: 2-12-2004
Recorder Kathryn M. Dewey
By tlv Deputy
DOCUMENT NO. 480058

Statement of Evidence

Page 2 of 3

Quarter Corner common to Section 1, Township 141 North, Range 30 West and Section 6, Township 141 North, Range 29 West, of the Fifth Principal Meridian, Cass County, Minnesota.

1873: General Land Office (G.L.O.) survey notes, page 9. P. H. Conger, Deputy Surveyor, set wood post for the corner and referenced it with the following:

4" Birch	3" Birch
N62°E	N30°W
14 lks (9.24')	17 lks (11.22')

Said notes are on file with the Secretary of State, St. Paul, Minnesota. Copies of these notes are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1917: Earl G. Harrington, US Surveyor, was unable to find any evidence of the original post or BT's. He set a 1"x36" iron pipe with a brass cap for the E 1/4 of Section 1 at a proportional position between the SE Corner of Section 1 and the M.C. between Sections 1 and 6 from which he made the following BT's:

12" Pine	8" Oak
N11 1/4°E	S60 1/2°W
110 lks (72.60')	67 lks (44.22')

Notes of GLO Resurvey of 1917, Page 162. Said notes are on file with the Secretary of State, St. Paul, Minnesota. Copies of these notes are on file with the Cass County Surveyor's Office, Walker, Minnesota.

September 11, 1981: Walter E. Curo found the 1"x36" iron pipe with brass cap stamped 1/4, S1-S6 from which he found a 14" Pine Snag, N12°20'E, 72.6' with an old rusty tag and stump hole remains, S60°30'W, 44.2'. He noted that the monument is 83.5' West of the Township Road and made the following new BT's:

12" Red Oak	5" White Oak	12" White Oak	8' Steel Sign Post
N11°12'W	S82°03'W	N78°11'E	South
30.00'	50.73'	57.75'	2.4'

Certificate of Location of Government Corner by Walter Curo filed in Cass County as Doc. No. 262611 dated 12/8/81.

September 15, 1999: R. Main, United States Forest Service, found the monument and sign post in good condition. He found the Red Oak N1°W, 30' to be a snag. He added one new BT and one new Sign Post. USFS Book 3, Page 49.

10" White Oak	8' Steel Sign Post
S26°W	North
44.82' to Spike	3.3'

Statement of Evidence

Page 3 of 3

October 17, 2003: Bryce Thompson and Quinten Kovanen of Northern Lights Surveying and Mapping found the 1/4 Corner, the 1" x 36" iron pipe with GLO brass cap. All three of Curo's BT's were found as well as the one established by the USFS. They added one additional steel sign post. The list of existing references are as follows:

10" Oak S80°W 50.75' to 60 d spike in North face up 1.0' 1981	10" Oak S20°W 44.85' to 60 d spike in West face up 3.5' 1999	14" Oak N78°E 57.80' to 60 d spike in South Face up 1.8' 1981	12" Oak snag N2°W 30.10' to 16 d In. West Face up 2.0' 1981
8' Steel fence post South 2.26' up 5.4' with 54-9 sign 1981	8' Steel fence post N1°W 3.18' up 5.05' with 54-2 sign 1999	8' Steel fence post East 2.92' up 5.1' with 54-2 and 54-9 signs 2003	

The original copy of the notes are on pages 13 & 69, Book 1 for USFS contract No. 53-6392-3-2 and are on file at the Supervisor's Office of the Chippewa National Forest in Cass Lake, Minnesota. Copies are in the office of Northern Lights in Grand Rapids, MN.

Coordinates by Static GPS:

State Plane Coordinate System
Minnesota Central Zone
NAD 83 (HARN 96)

Y = 1,078,920.19'
X = 2,585,815.33'

Cass County North
Northing = 193,160.25'
Easting = 452,837.41'

Geodetic Coordinates:

Latitude = 47°03'31.8994"N
Longitude = 94°24'21.1354"W