


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 28 , Township 133 , Range 29  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 10/03/05 found a 1' IRON PIPE  
DATE
- left monument as found     lowered monument     removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

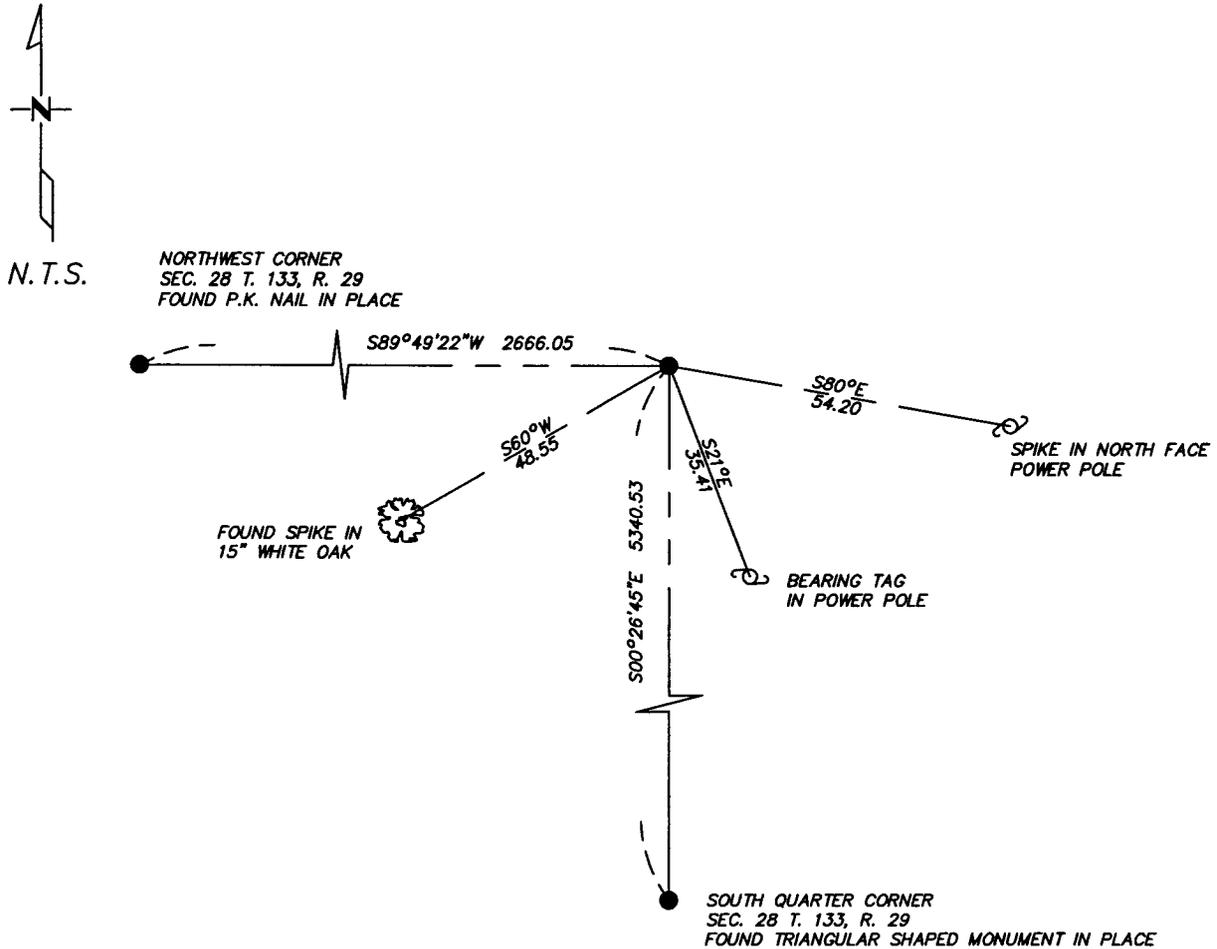

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ch [Signature]      3/23/06  
SIGNATURE                      DATE

Registration No. 43932

- Land Surveyor     Professional Engineer  
 County Surveyor     County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_ M. on the \_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_  
 By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence

North 1/4, Section 28, T. 133N. R. 29W., 5th P.M.

- 1870 – Wood Post was set for corner.
- 1905 – W.M. Hallet Survey shows corner found.
- 1969 – Dean Anderson (R.L.S. 3091) set pipe from 1961 Bearing Trees.
- 1976–1977 – Dean Anderson finds 1/2" pipe capped R.L.S. 3091 which fit 1969 Bearing Tree Ties.
- 1999 – Cass County Surveyors Office finds a 1" pipe down 0.4 feet in place.
- Aug. 2003 – Bruce Grivna (R.L.S. 17253) Survey shows monument found.
- 2005 – Westwood Professional Services, Inc. finds 1/2" pipe in place. Ties to which are shown on the front of this sheet.

A000515678  
OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON  
07/24/2006 09:43:52AM  
AS DOC #: A000515678  
PAGES: 2  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER  
BY Kathryn M. Norby  
FDZ DEPUTY