

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at \_\_\_\_\_ o'clock \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ A.D.

*Todd R. Johnson*  
\_\_\_\_\_  
TODD R. JOHNSON  
Date: 1/11/07 License No: 44869  
44869

County Recorder \_\_\_\_\_  
By: \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

NORTHEAST CORNER Corner of Section 21, Township 139, Range 26, 5TH P.M.

On 9/27/06 found a FOUND RAILROAD SPIKE DOWN 4" IN CENTERLINE CO. RD. 48


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

## SKETCH OF REFERENCE TIES

Corner Index: N-13

Not to Scale

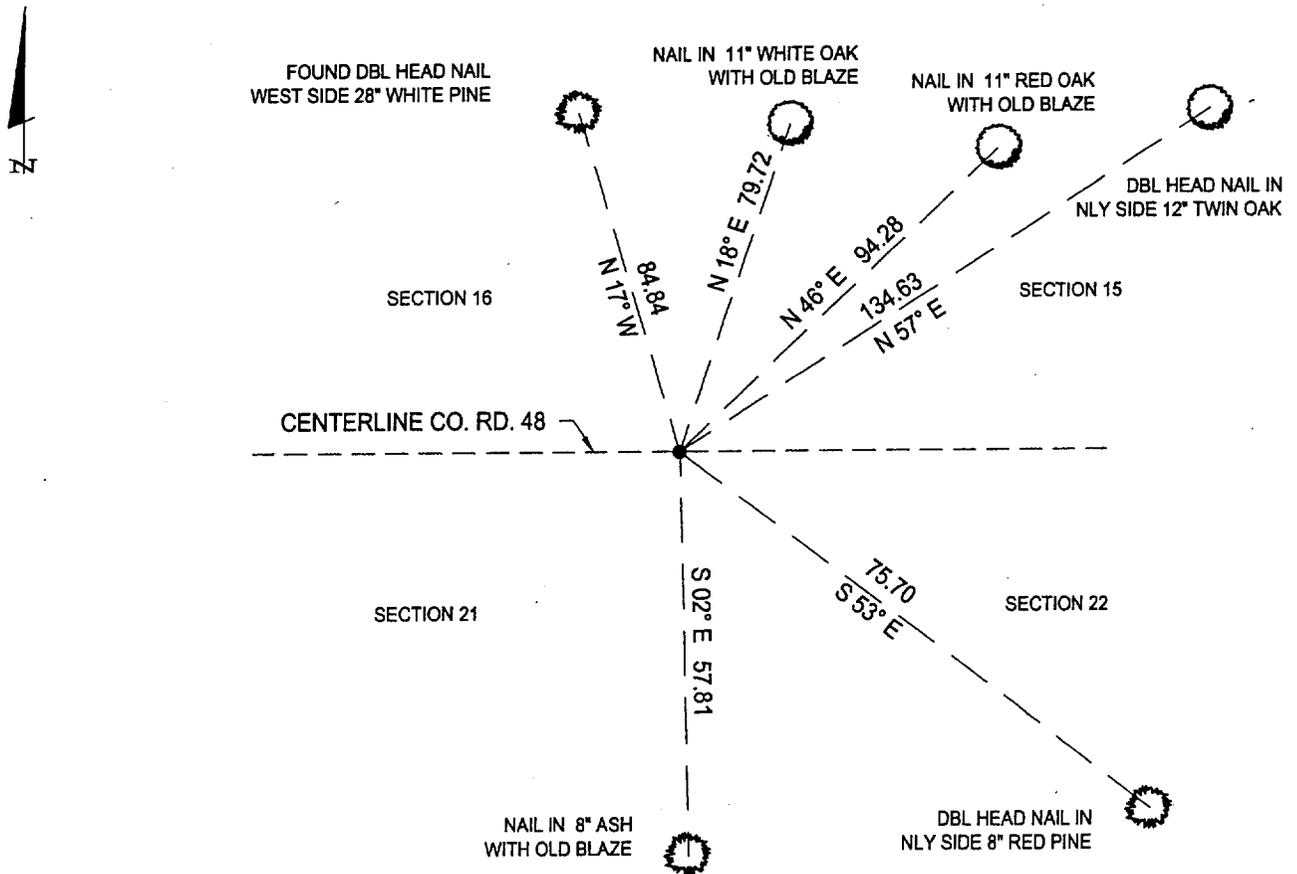

Statement of evidence for this corner position is on the back of this page

STATEMENT OF EVIDENCE

Index No. N - 13

Northeast Corner, Section 21, Township 139  
North, Range 26 West, Cass County,  
Minnesota

- 1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner with the following witnesses: A 6 inch White Birch, North 41 degrees East, 18 links; A 6 inch White Birch, South 44 degrees East, 23 links; A 20 inch White Pine, South 80 degrees West, 35 links; A 20 inch White Pine, North 65 degrees West, 21 links.
- 1937 Survey by CCC's Book 3, page 37, Washburn Lake Ranger Station, Ironwood stake set.
- 2000 September, Cass County Survey Office finds a railroad spike, down 0.4 feet in the centerline of County Road No. 48 and ±85 feet West of the centerline of Crooked Lake Trail. Also found were the old blazes and nails in 3 bearing trees: An 11 inch White Oak, North 18 degrees East, 79.72 feet; An 11 inch Red Oak, North 46 degrees East, 94.28 feet; An 8 inch Ash, South 2 degrees East, 57.81 feet. An additional witness was established: A 22 inch White Pine, North 18 degrees West, 84.79 feet.
- 2006 July 17<sup>th</sup>, a Landecker and Associates, Inc. survey crew finds a railroad spike, down 4 inches in the centerline of County Road No. 48 and accepts it as the corner position. The following accessories are established: A 12 inch Twin Oak, North 57 degrees East, 134.63 feet; An 8 inch Red Pine, South 53 degrees East, 75.70 feet.

A000525256

OFFICE OF COUNTY RECORDER  
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR  
RECORDED ON  
04/12/2007 08:41:29AM

AS DOC #: A000525256  
PAGES: 3 2 mw  
REC FEES: \$0.00

KATHRYN M. NORBY  
COUNTY RECORDER

BY Kathryn M Norby  
mmw DEPUTY