

A000549049

OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA

CERTIFIED, FILED, AND/OR
RECORDED ON
05/12/2009 03:29:23PM

AS DOC #: A000549049
PAGES: 2
REC FEES: \$0.00

KATHRYN M. NORBY
COUNTY RECORDER

BY Kathryn M Norby DEPUTY
mw


Index No. N-13

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 21, Township 135, Range 30
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/24/98 Placed a 3/4" X18" Iron Rod with plastic cap marked "DNR"
DATE SURVEY MARKER"

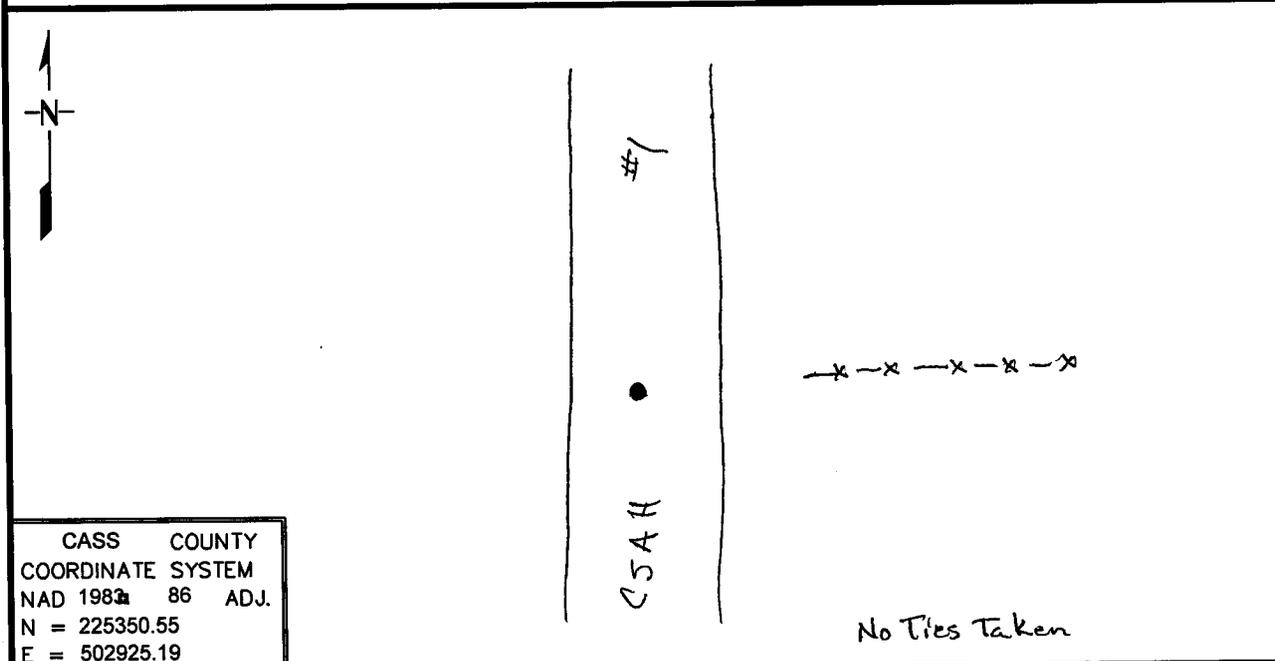

CASS COUNTY
COORDINATE SYSTEM
NAD 1983 86 ADJ.
N = 225350.55
E = 502925.19

Statement of evidence for this corner location is on back of this page.

4/30/09 JDW
FOM01856

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE [Signature] DATE 4/30/09 License Number 16098

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Northeast Corner Section 21, Township 135 North, Range 30 West

The Department of Natural Resources, Bureau of Engineering contacted the following offices for information regarding this corner:

MN Secretary of State
 Cass County Surveyor
 Widseth, Smith and Nolting of Brainerd
 Landecker and Associates of Pequot Lakes
 Landecker and Associates of Walker
 Central Minnesota Surveying

1869 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Tam. 6" N 68° E 15 links (9.90')
 Tam. 7" S 25° E 7 links (4.62')
 Tam. 6" N 42 ° W 25 links (16.5')
 Tam. 4" S 54° W 17 links (11.22')

???? The survey of State Rural Highway No. 80 shows stationing at this corner with the following note: in line with north line of fence. The distance to the Northeast Corner Section 16 is 5298.9' and to the Northeast Corner Section 28 is 5269.5'.

1920 Lincoln Mackey surveyed the Rainbow Trail through this township. He found a wood stake at the corner set by State Highway Engineer. He measured 5293.1' to the Northeast Corner of Section 16 and set the quarter corner midway and on line between the section corners. The Rainbow Trail is on the east - west quarter line of Section 16. E.S.Tusler set an iron monument to mark the corner.

1998 In February, the DNR survey crew searched for the corner and located the centerline of the north - south County Highway and a fence line east. The fence posts in the fence line are mostly newer posts, 10 - 20 years old, but there are some very old posts also in this fence line. I accepted the intersection of the fence line and the centerline of the road as the obliterated location of the corner. A MNDNR Survey Marker was set to mark the corner. Distances were measured to the following corners:

East Quarter Corner Section 16 - N 00°17'42"E 2648.41'
 North Quarter Corner Section 21 - N 89°37'49"W 2641.67'
 Approx. (centerline - centerline) Northeast Corner Section 28 - S01°00'32"E
 5267.86'

For more information on our survey in this area please contact MN DNR, Bureau of Engineering, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401