

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 7, Township 136, Range 30, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found _____
- left monument as found, lowered monument, removed monument (explain)
- On 11/15/10 PLACED 1/2" x 16" Iron pipe capped #44530
DATE (SET IRON 0.5' BELOW SURFACE)



SKETCH OF REFERENCE TIES

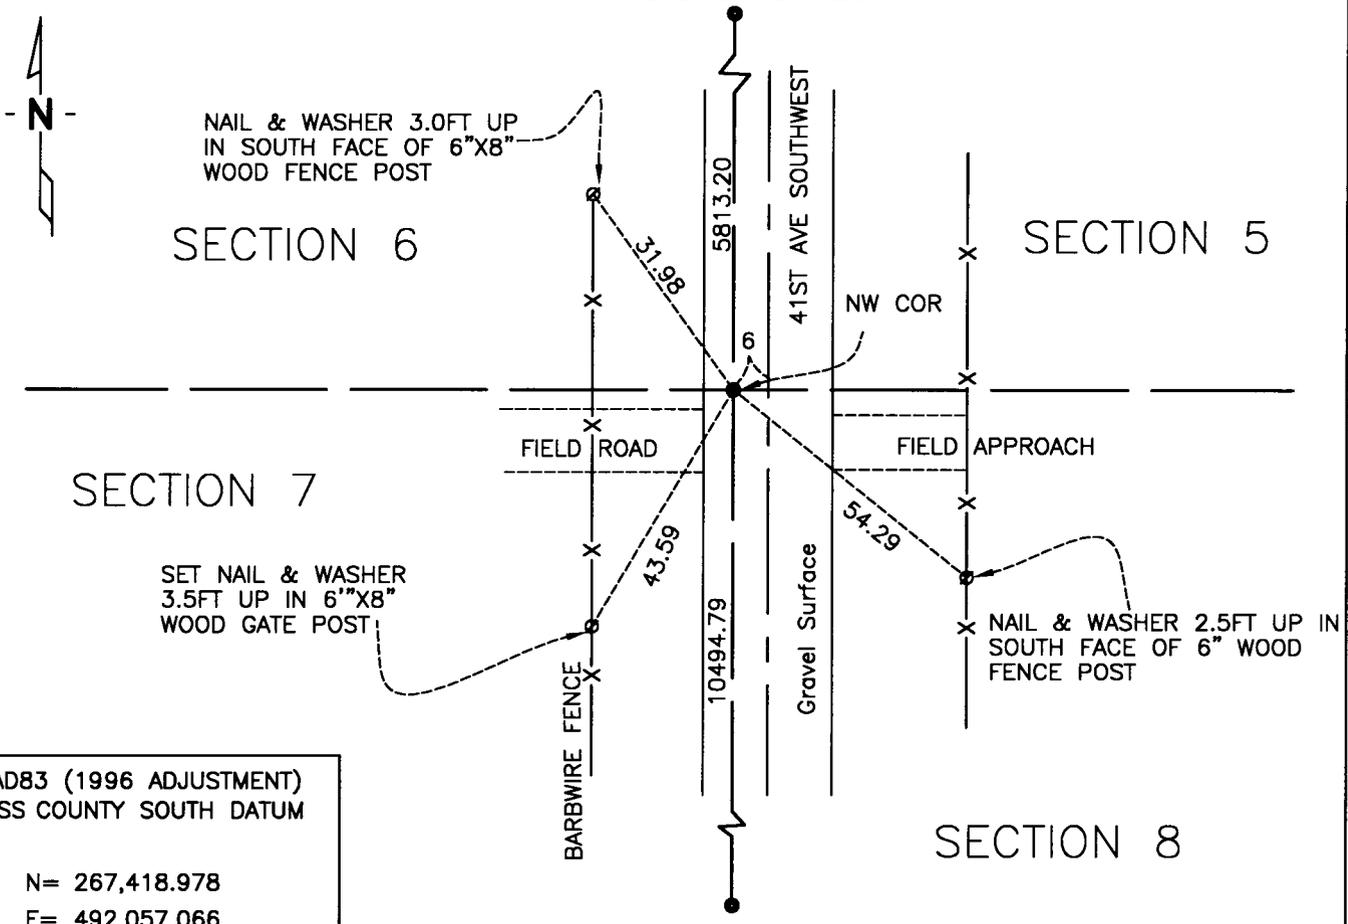

NAD83 (1996 ADJUSTMENT)
CASS COUNTY SOUTH DATUM

N= 267,418.978
E= 492,057.066

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SURVEYOR

2/10/11
DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20____

County Recorder _____
By _____, Deputy
DOCUMENT NO. _____

Statement of Evidence:**Northeast corner of Section 7, Township 136 North, Range 30 West**

Oct. 1870 R. Cronk, GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:

7" W. Birch	N57°E	31 links (20.46 feet)
8" Birch	S67°W	18 links (11.88 feet)
10" W. Birch	S58°E	40 links (26.40 feet)
18" J. Pine	N65°W	25 links (16.50 feet)

Dec. 1908 John Curo, County Surveyor, set a stake at this corner as part of his breakdown and survey of Section 6, Township 136, Range 30, he found all the original GLO bearing trees, however the jack pine called for by the GLO surveyors is actually a white pine and measures 19.75 feet. Curo used the other 3 bearing trees to reestablish the corner and set a stake. County Survey Record Book "B", survey record No. 273. (see page 156 for detailed section 6 measurements).

June 1909 Township Road Order shows no survey.

May 1911 Township Road Order shows no survey.

Nov. 1933 Township Road Order shows no survey.

Nov. 2010 Craig E. Johnson, LS, CFedS, set a 1/2 iron pipe capped No. 44530, 0.5 feet below the surface of the gravel road. The corner was established by projecting a straight line from a found iron at the NE corner of Section 6 to a found iron at the SE corner of Section 18, John Curo's 1908 measurement of 5813.20 feet was used from the NE corner of said section 6 to the subject corner. As corroborating evidence an existing old fence at the 1/16 line 1306.5 feet north of the subject corner match's Curo's 1908 measurement. (An excavation search for this corner was considered, however this portion of the road is in a cut area and a search would most likely be unproductive.) (The 16th and 1/4 corners to the west of this corner were set by Curo 1908, we searched for the corners on two different occasions and found nothing). We accepted the set iron pipe as the corner and set ties as indicated on the face of this certificate.

A000568459

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:52:47 AM
AS DOC #: A000568459
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER**