

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 30, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found _____
- left monument as found, lowered monument, removed monument (explain)
- On 12/07/10 PLACED SET 1/2IN IRON PIPE WITH RLS#44530
DATE

SKETCH OF REFERENCE TIES

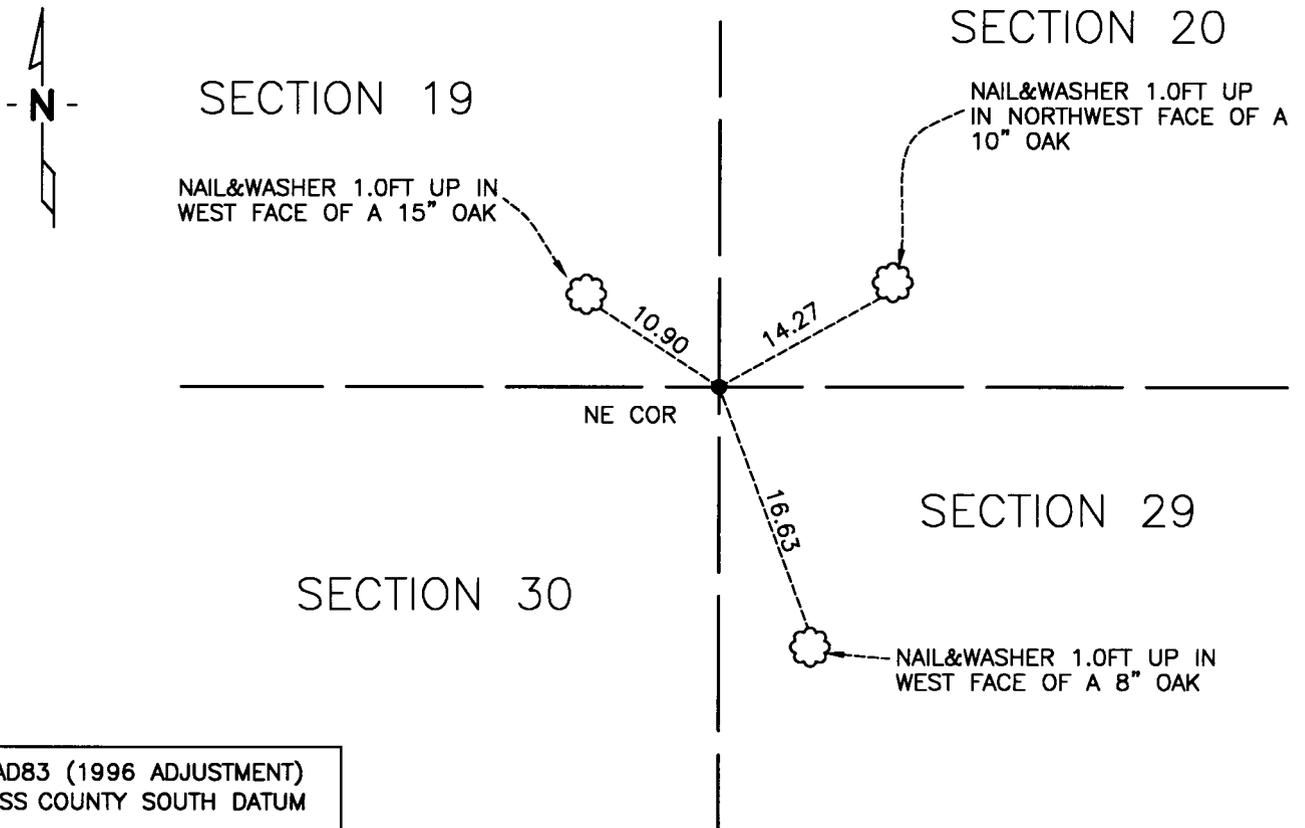

NAD83 (1996 ADJUSTMENT)
CASS COUNTY SOUTH DATUM

N= 220,042.271
E= 492,357.587

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SURVEYOR

02/14/11
DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____



Statement of Evidence:

Northeast corner of Section 30, Township 135 North, Range 30 West

Oct. T.B. Walker GLO Deputy Surveyor set a wood post for the original
1869 corner and referenced it as follows:

- 7" Blk. Oak N66°W 40 links (26.40 feet)
- 13" Blk. Oak S90°E 205 links (135.30 feet)
- 9" Soft Maple S60°W 42 links (27.72 feet)
- 20" Pine N83°E 181 links (119.46 feet)

Oct. E.B. Horst LS 376, Deputy County Surveyor, Survey Book C,
1917 Record No. 388, page 72, on file in the CCSO, states "We
continue N. and look for the section corner of secs. 19, 20, 29,
30, which we are unable to find."

April B. Hippen CCSO technician and D. Bundy, Cass County Land
2009 Department technician, records of the CCSO, searched area, found
no evidence of corner. There is a small low area here which may
explain the unusual configuration of the original witness trees.

Dec. Craig E. Johnson, LS, CFedS, another search of the area found
2010 no evidence of the corner or it's accessories, the land calls in
the GLO notes were examined and found to be inconclusive, the E
1/4 corner of Section 19 and the N 1/4 of Sec 29 were
searched for and nothing found. Johnson set a 1/2 iron pipe
capped No. 44530. The corner was established by double
proportion using the NE corner of Section 29, NE Corner of
Section 19, NW Corner of Section 30 and NE Corner of Section
31.

A000568475
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:53:03 AM
AS DOC #: A000568475
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER