

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH Corner of Section 32, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 11/30/10 found 5/8" REBAR DOWN 0.8'
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ PLACED \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

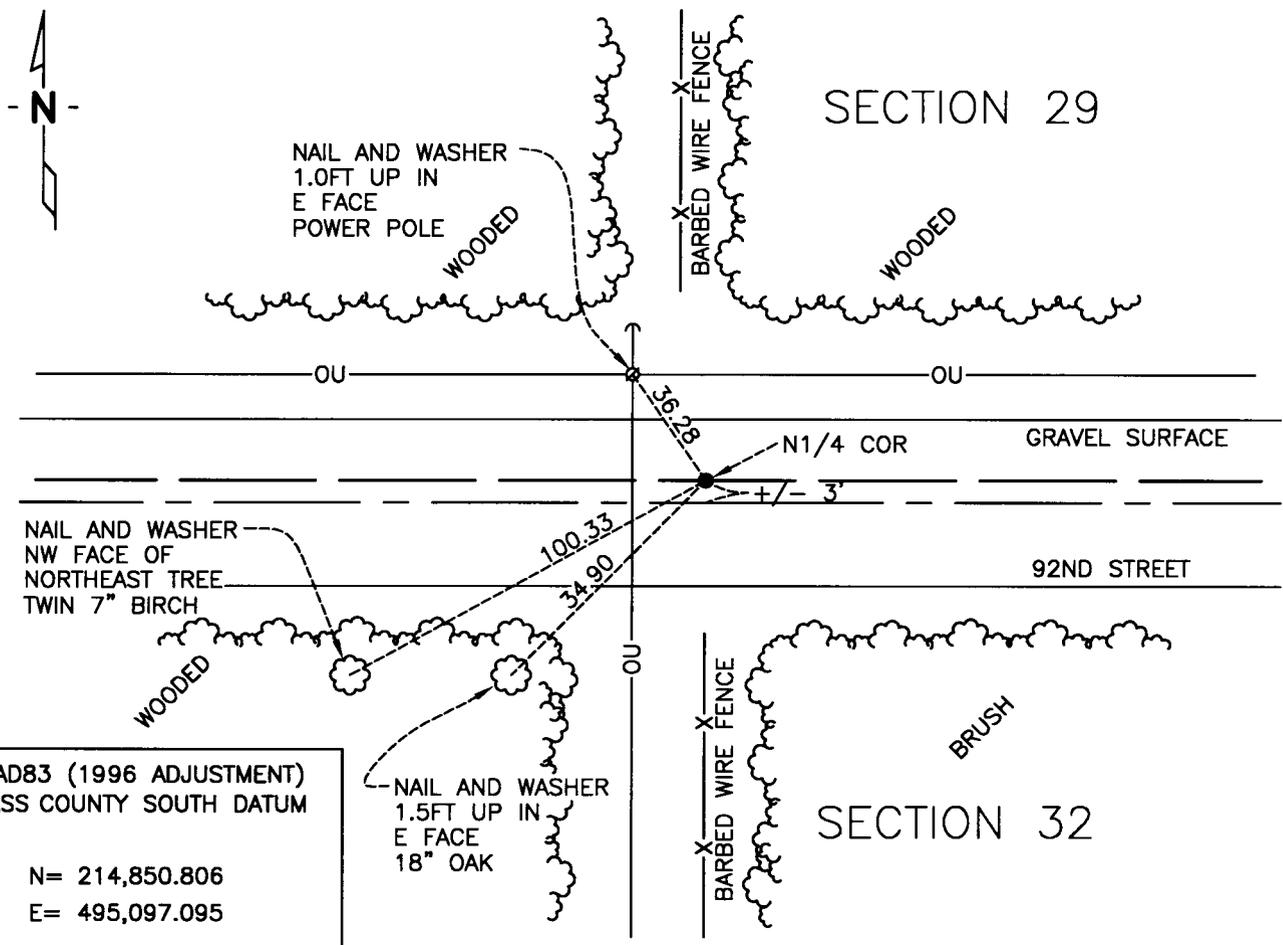

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 02/14/11  
SURVEYOR DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

### OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

8 0 1 8 8 8 8  
 TX:4013191

Statement of Evidence:**North Quarter Corner of Section 32, Township 135 North, Range 30 West**

- Oct. 1869 T.B. Walker GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:  
 10" Oak N5°E 25 links (16.50 feet)  
 12" Tam. S28°W 62 links (40.92 feet)
- Oct. 1917 E.B. Horst, LS 376, Deputy County Surveyor, Survey Book C, Record No. 388, Page 72, on file in the CCSO, states "set stake on line and look for 1/4 corner between sections 29 and 32. All are gone and we continue our line W." On page 76 he states "1/4 corner at sta 2691.70 W. goes N. 42.00 ft. where I set a 2" x 48" iron Monument. No timber for B.Ts."
- Feb. 2009 B. Hippen CCSO technician, records of the CCSO, found a 5/8 inch rebar, down 0.8 foot, 3 feet more or less, north of centerline of 92nd Street, on fence line to south, 3 feet more or less, east of fence line to the north, and witnessed the same as follows:  
 14" Burr Oak N54°E 118.35 feet  
 14" Burr Oak S37°W 35.14 feet  
 Power Pole N8°W 36.48 feet
- Nov. 2010 Craig E. Johnson, LS, CFedS, found a 5/8" Rebar, the iron matched the position of the K.L.D. survey. The Iron was accepted as the corner and reference ties set as depicted on the face of this certificate.

**A000568481**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**02/23/2011 07:53:09 AM**  
**AS DOC #: A000568481**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**