

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST 1/4 Corner of Section 31, Township 135, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found _____
- left monument as found, lowered monument, removed monument (explain)
- On 12/09/10 PLACED SET 1/2" IRON PIPE WITH RLS# 44530
DATE

SKETCH OF REFERENCE TIES

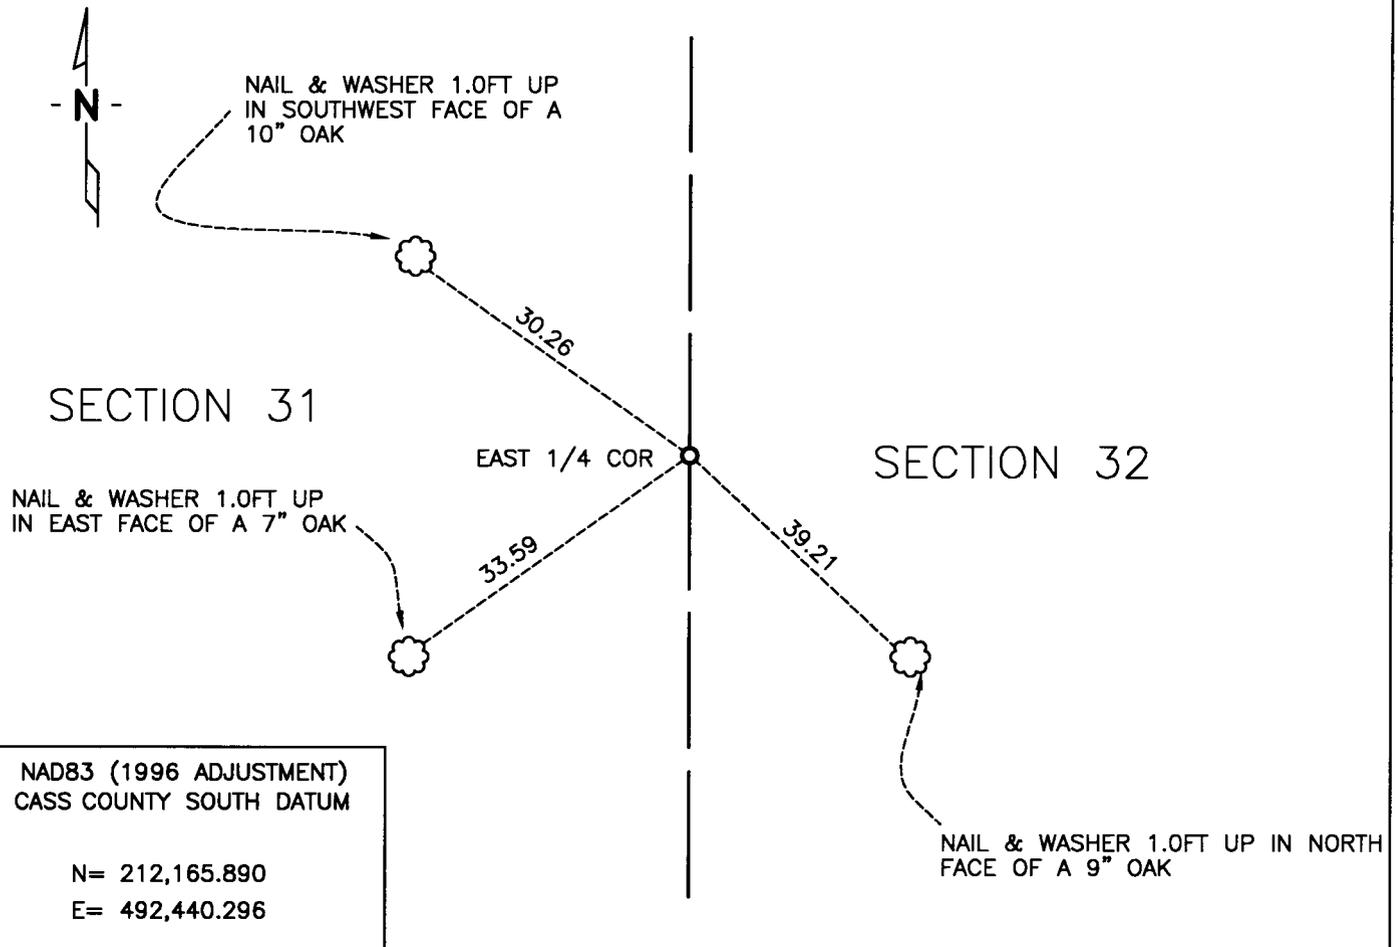

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] SURVEYOR 02/14/11 DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at ____M. on the _____ day of _____ A.D., 20____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____



Statement of Evidence:**East Quarter Corner of Section 31, Township 135 North, Range 30 West**

Oct. 1869 T.B. Walker GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:

14" Oak S38.5°W 122 links (80.52 feet)
8" Oak S23°E 70 links (46.20 feet)

Oct. 1917 E.B. Horst, LS 376, Deputy County Surveyor, Survey Book C, Record No. 388 page 72, on file in the CCSO, states "Return to our line and go S. between sections 31 & 32 and look for the 1/4 corner which is also gone."

April 2009 B. Hippen CCSO technician, records of the CCSO, located a brook noted in the GLO land calls and searched area 11.00 chains (726.00 feet) north of the brook. No evidence of the corner was found.

Dec. 2010 Craig E. Johnson, LS, CFedS, another search of the area found no evidence of the corner or it's accessories, the land calls in the GLO notes were examined and found to be inconclusive, the brook called for in the GLO notes 11.00 chains (726.00 feet) south of the corner measures 789.00 feet more or less, however the brook may not be in the same location as the 1869 survey because it falls in the center of a wetland and the location isn't obvious. Johnson set a 1/2 iron pipe capped No. 44530. The corner was established by single proportion on line and mid way between the NE and SE corners of Section 31.

A000568483
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:53:11 AM
AS DOC #: A000568483
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER