

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 6, Township 134, Range 30, 5th P.M.


STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 12/07/10 PLACED SET 1/2IN IRON PIPE WITH RLS#44530  
DATE



SKETCH OF REFERENCE TIES

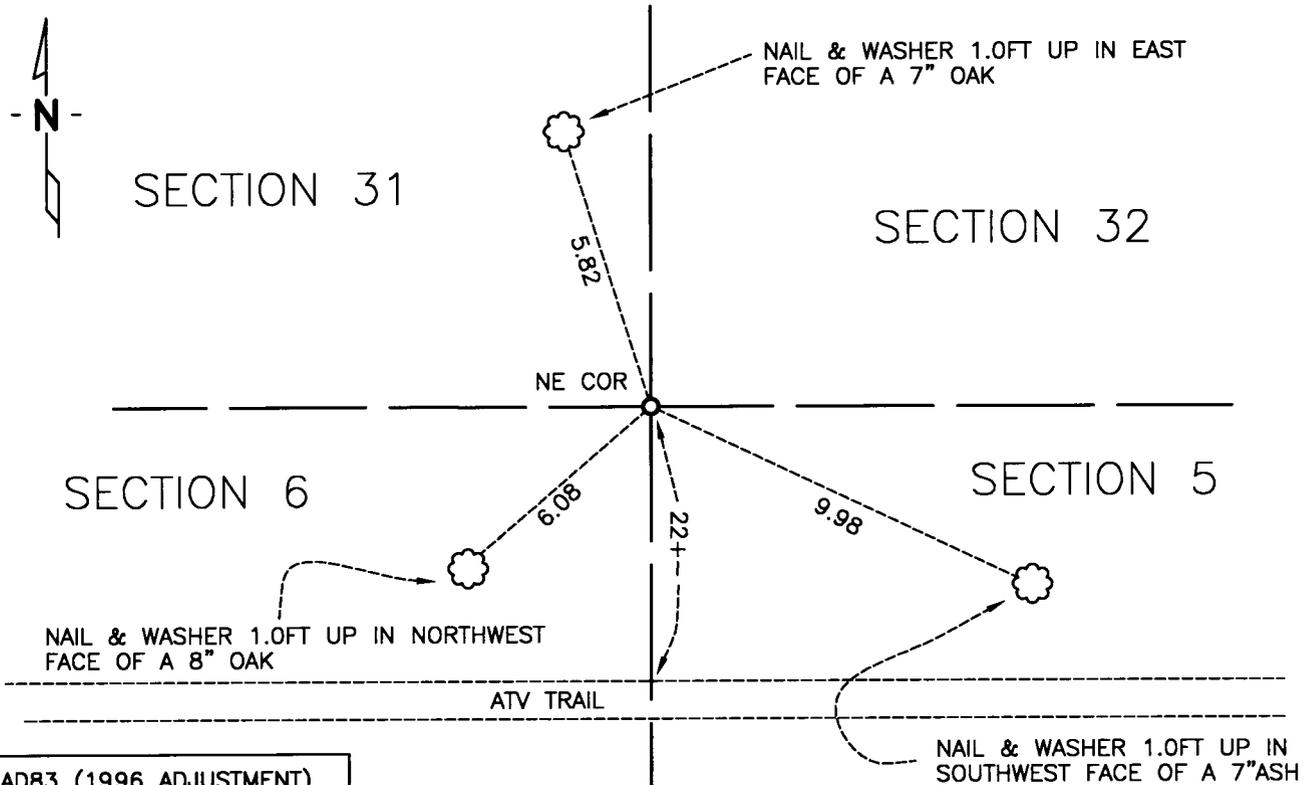

NAD83 (1996 ADJUSTMENT)  
CASS COUNTY SOUTH DATUM

N= 209,457.241  
E= 492,475.093

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*[Signature]*  
SURVEYOR

02/14/11  
DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D., 20\_\_

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:**Northeast Corner of Section 6, Township 134 North, Range 30 West**

April 1858 E.N. Darling GLO Deputy Surveyor set a wood post for the original corner and referenced it as follows:

9" Lin.	N8°E	8 links (5.28 feet)
30" Pine	N25°W	47 links (31.02 feet)
14" Lin.	S45°W	18 links (11.88 feet)
14" Spruce	S69°E	40 links (26.40 feet)

April 1869 N. Butler GLO Deputy Surveyor, in the notes of the subdivision of Township 134 North Range 30 West, closed 91 links (60.06 feet) east of the original corner.

April 1905 Town road survey of the Pillager and Pine River Road, Cass County Road Calender Book, Page 42, on file at the CCSO.

April 2009 B. Hippen CCSO technician, found no evidence of the corner at the search area, this position falls 50 feet more or less, North of a trail.

Dec. 2010 Craig E. Johnson, LS, CFedS, another search of the area found no evidence of the corner. Johnson set a 1/2 iron pipe capped No. 44530. The corner was established by single proportion, prorating the Government chainage between the SW corner of section 31 and the computed position for the SE corner of Section 32 which falls in a lake, the position for the SE corner of Section 32 was computed by K.L.D. Surveying of Brainerd during a Nov. 2005 survey in Section 33, The position for Johnson's set corner was also corrected for latitudinal curve.

**A000568487**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**02/23/2011 07:53:15 AM**  
**AS DOC #: A000568487**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**