

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

 Patrick A. Trottier

Date: 2-14-2011 License No: 41002

 41002

A000568498
OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON
02/23/2011 07:53:26 AM
AS DOC #: A000568498
PAGES: 2 REC FEES: 0.00
KATHRYN M. NORBY
COUNTY RECORDER



EAST QUARTER Corner of Section 30, Township 138, Range 30, 5th P.M.

On _____ found a _____


left monument as found, lowered monument, removed monument (explain)

On 12-07-2010 placed a 1/2"Ø IRON PIPE W/ CAP#41002

SKETCH OF REFERENCE TIES

Corner Index: **T-5**

Not to Scale

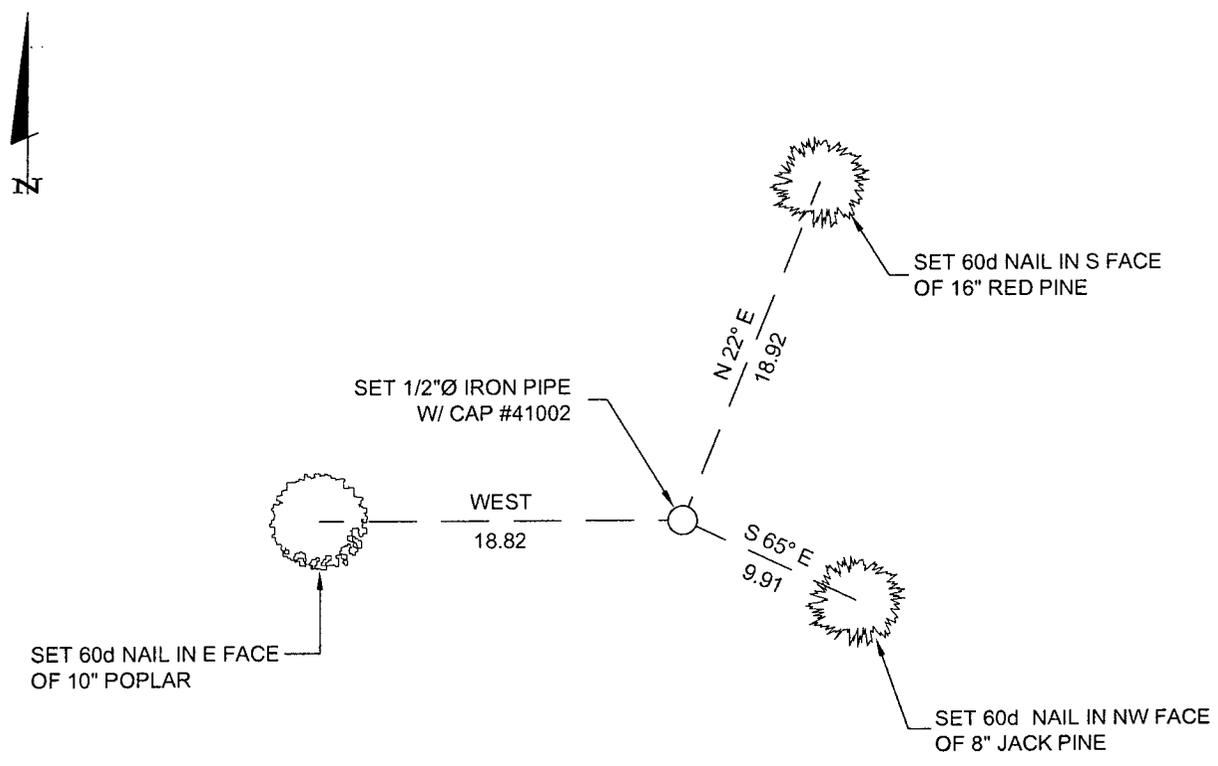

Statement of evidence for this corner position is on the back of this page

Statement of Evidence

**East quarter corner, Section 30, Township 138 North, Range
30 West, 5th Principal Meridian, Cass County, Minnesota**

1865 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

8" N. Pine	N 69° E	63 links
15" N. Pine	S 28° W	85 links

1920 – Lincoln Mackey performed a survey as recorded in County Survey Record Book "C", pages 362-363, and Survey Record No. 440. Mackey first produced SE corner of Section 30 by double proportion, then placed iron at this quarter corner by single proportion between said SE corner and found NE corner of Section 30.

2010 – Patrick Trottier, PLS 41002, performed survey of East line of Section 30. NE and SE corners were found and accepted. A 2" pipe was found 56 feet south of a calculated single proportion position between said NE and SE corners. Distances as measured by 1920 Mackey differ greatly from accepted corners and could not be reconciled. Trottier placed a ½" pipe with plastic cap stamped "RLS 41002" at single proportion position, from which the following witnesses were established:

10" Poplar	West	18.82 feet
16" Red Pine	N 22° E	18.92 feet
8" Jack Pine	S 65° E	9.91 feet