



A000583789

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/6/2012 9:09:56 AM

AS DOC #: A000583789

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER  
BY SR \_\_\_\_\_ Dep


Index Number A-1

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH WEST Corner of Section 6, Township 135, Range 32  
5TH Principal Meridian, State of Minnesota, County of Cass

At the corner location shown on the sketch:

- On 2-15-11 found a 6x6 Concrete Post in Swamp.
- left monument as found       lowered monument       removed monument (explain)
- On 2-15-11 placed on 3.5" Brass cap welded to a 2' rebar.  
Drilled hole through center of Concrete Mon.

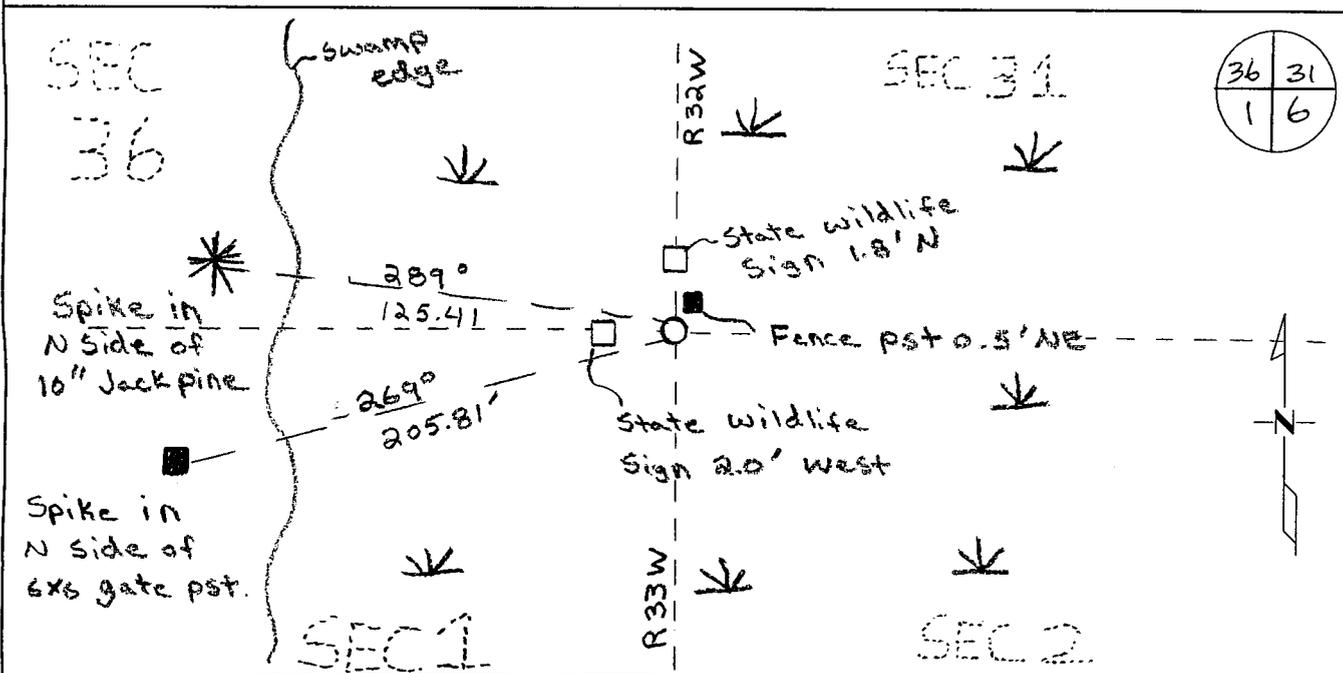

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature Chris Hoglund  
Chris Hoglund, PS  
License No. 43932

Date: 6/13/12

Page 1 of 2 A000583789





**Statement of Evidence:**

Northwest Corner of Section 6, Township 135 North, Range 32 West, Byron Township, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota.

- 1858 It does not appear that the Original US General Land Office set this corner and 2 witness corners were placed. All copies of the GLO notes were not legible but the plat shows mathematical data to the corner.
- 1962 Minnesota DNR conducted survey and found concrete monument, filed in office in St. Paul (engineering).
- 2000 Cass County Surveyors Office found in place; 6"x6" concrete monument in swamp 36' +/- West from monument to dry ground. Two state wildlife refuge signposts sit 2.0' West and 1.8' northerly of monument. No sign of B.T.s.
- 2002 Cass County Surveyors Office found concrete 6"x6" post, 1.8' South & 2.0' East of state signs, down 1.2' located with GPS. Coordinates as follows from Cass County South 1996 adjustment:  
N: 241147.346  
E: 421289.024
- 2011 Westwood Professional Services, Inc. found a concrete monument in place (origin unknown). Drilled hole in center of monument and placed a 24" monument with a 3.5" cap flush with existing grade. Located set monument with a 20 minute static GPS shot and verified coordinates with VRS GPS observation, which agree with the 2002 Cass County Surveyors office position. . Analysis of the recovered data, field evidence and survey measurements, indicates that the monument found by Westwood Professional Services, Inc is the best available evidence for this corner.

Cass County Coordinates North Zone obtained by static GPS (NAD 83, 1996 Adj)  
N: 241147.07  
E: 421289.28

Central State Plane Coordinate  
N: 891178.95  
E: 2491447.21