

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 4
Township 138 N, Range 32 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass



A000591923

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/26/2013 11:00:14 AM

AS DOC #: A000591923

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 10/15/2012, found a(n): MN/DOT Telspar Monument up 0.3' and 1' North of a Fence Post.

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

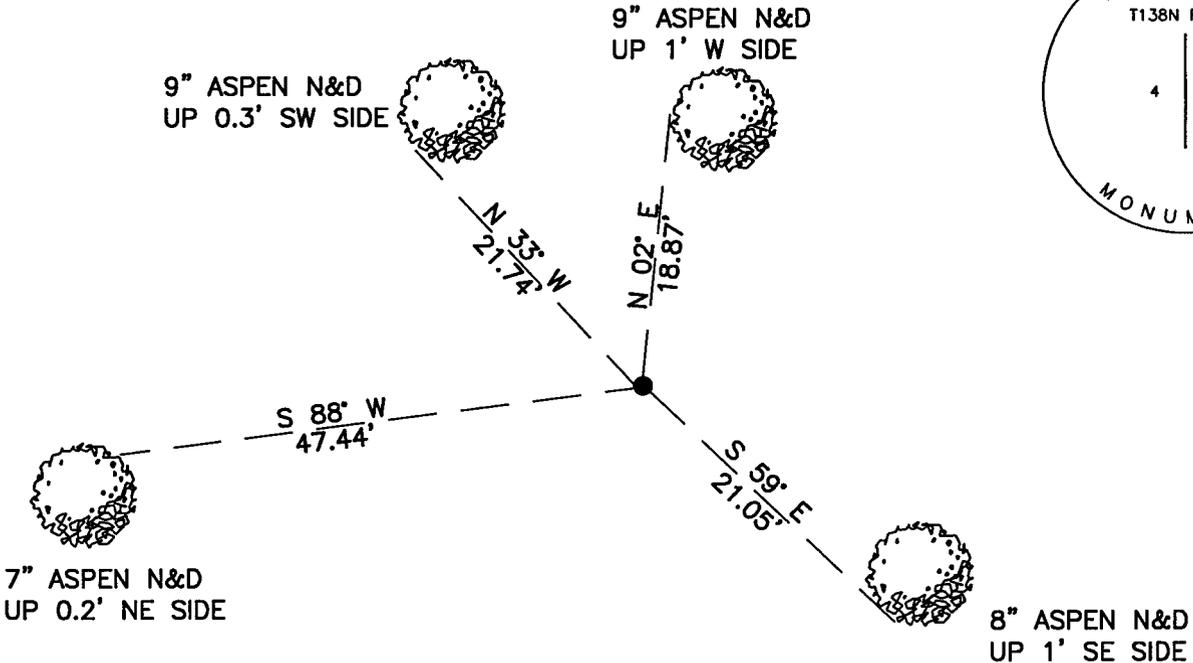

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

CASS COUNTY SOUTH COORDINATES

Northing: 333641.42
Easting: 435674.66

NAD 83/2007 Adjustment.
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Jarrett M. Leas
signature

3-11-13
date

Jarrett M. Leas, Minnesota License No. 42619



Statement of Evidence

East Quarter corner Section 4, Township 138 North, Range 32 West, Cass County Minnesota

- 1860 The Original Survey was run and a post was set to mark the corner with the following accessories: 12" Tamarack S 47 E 4 links and a 10" Tamarack S 87 W 6 links.
- 1997 K. Donaghue, Minnesota Department of Transportation, set an aluminum capped square steel 2" tube at a lost position. A Certificate of Location was filed as Document # 433374. The following ties were made: 4" Aspen N 19 E 25.85', 3" Aspen S 64 E 25.47', 4" Aspen S 88 W 47.44', 4" Aspen N 33 W 21.74', and a steel fence post South 1.0'.
- 2012 Kadrmas Lee & Jackson field crews searched the area and recovered the 2" square steel tube with aluminum cap along with a 9" Aspen N 33 W 21.74' and a 7" Aspen S 88 W 47.44' from the 1997 Certificate of Location. The following ties were also made: 9" Aspen N 02 E 18.87' and a 8" Aspen S 59 E 21.05'.
- 2012 Jarrett Leas, RLS 42619, after analysis of record and survey information accepts this monument as the true location of the corner.

Contacts pertaining to this corner are as follows:

Cass County Surveyor's Office
Cass County Recorder's Office
Cass County Engineer's Office
MN Department of Natural Resources
MN Department of Transportation
Bruce Skipton RLS 17768