

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 9  
Township 138 N, Range 32 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF Cass



A000591928

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/26/2013 11:00:19 AM

AS DOC #: A000591928

PAGES: 2  
REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep




On 10/16/2012, found a(n): MN/DOT Telspar Monument  
0.3' Above the Surface

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

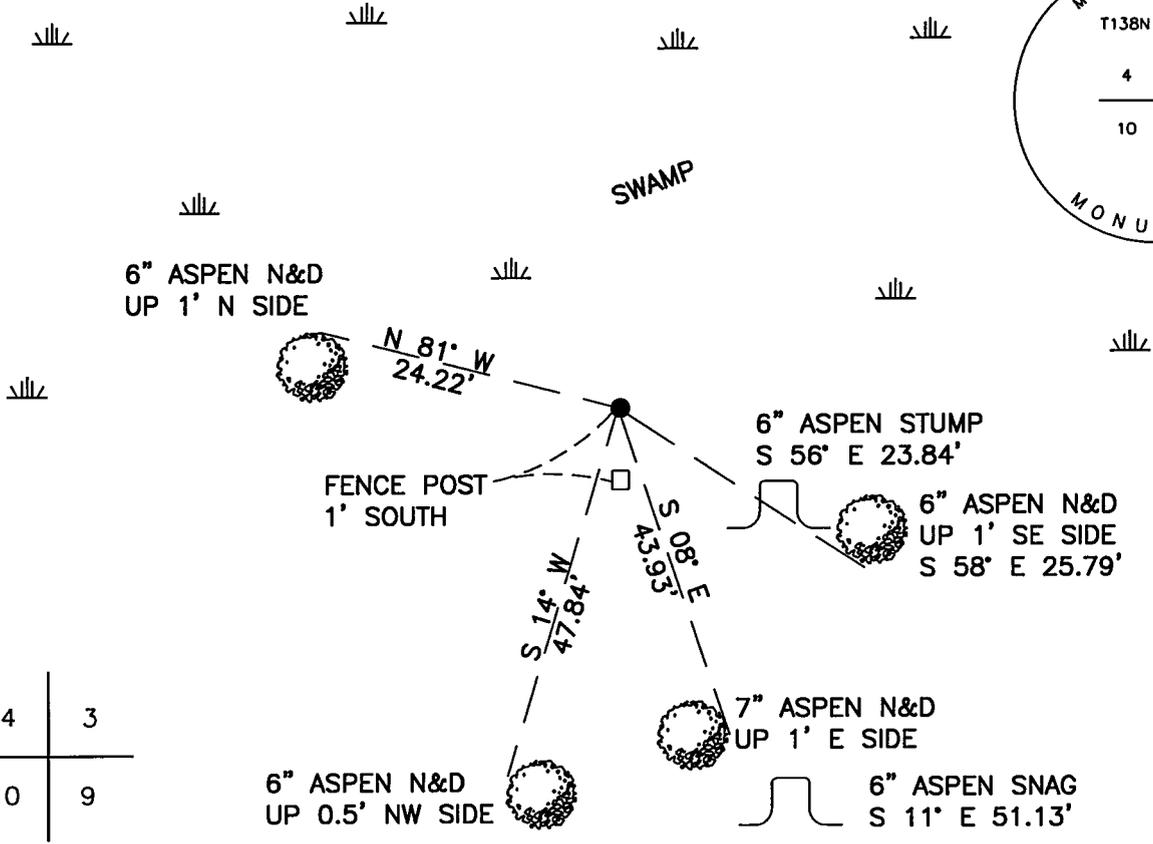

## "SKETCH OF REFERENCE TIES"

(not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

## CASS COUNTY SOUTH COORDINATES

Northing: 336324.15  
Easting: 425115.34

NAD 83/2007 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

signature

3-11-13  
date

Jarrett M. Leas, Minnesota License No. 42619



**Statement of Evidence**

***Northeast corner Section 9, Township 138 North, Range 32 West, Cass County Minnesota***

- 1860 The Original Survey was run and a post was set to mark the corner with the following accessories: 7" Tamarack S 55 W 11 links, 7" Tamarack N 53 ½ E 15 links, 4" Tamarack S 25 ½ E 8 links, and a 7" Tamarack N 28 ½ W 9 links.
- 1997 K. Donaghue, Minnesota Department of Transportation, set a 2" square steel tube with aluminum cap at a lost position and filed a Certificate of Location as Document # 433377. The following ties were made: 4" Aspen S 56 E 23.84', 6" Aspen S 11 E 51.13', 4" Aspen S 14 W 47.84', 3" Aspen N 76 W 24.39' and a steel fence post South 1.0'.
- 2012 Kadrmas Lee & Jackson field crews searched the area and recovered the 2" square steel tube with aluminum cap. The following accessories were also found: 6" Aspen S 14 W 47.84', 6" Aspen snag S 11 E 51.13', and an Aspen stump S 56 E 23.84'. The following ties were also made: 6" Aspen N 81 W 24.22', 6" Aspen S 58 E 25.79', and a 7" Aspen S 08 E 43.93'.
- 2012 Jarrett Leas, RLS 42619, after analysis of record and survey information accepts this monument as the true location of the corner.

Contacts pertaining to this corner are as follows:

Cass County Surveyor's Office  
Cass County Recorder's Office  
Cass County Engineer's Office  
MN Department of Natural Resources  
MN Department of Transportation  
Bruce Skipton RLS 17768