



A000592110

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/2/2013 11:50:41 AM

AS DOC #: A000592110

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Page 1 of 2 A000592110

Index No. _____ J-9

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 17, Township 134, Range 32

5TH Principal Meridian, State of Minnesota, County of CASS


At the corner location shown on the sketch:

On 3/3/11 found a 1/2" INSIDE DIAMETER IRON PIPE WITH ILLEGIBLE PLASTIC CAP DOWN 0.5'
DATE

AT EAST EDGE OF GRAVEL ROAD, 3' EAST OF SOUTHERLY EXTENSION OF CENTERLINE NORTH

left monument as found, lowered monument, removed monument (explain)

On _____ Placed a _____
DATE

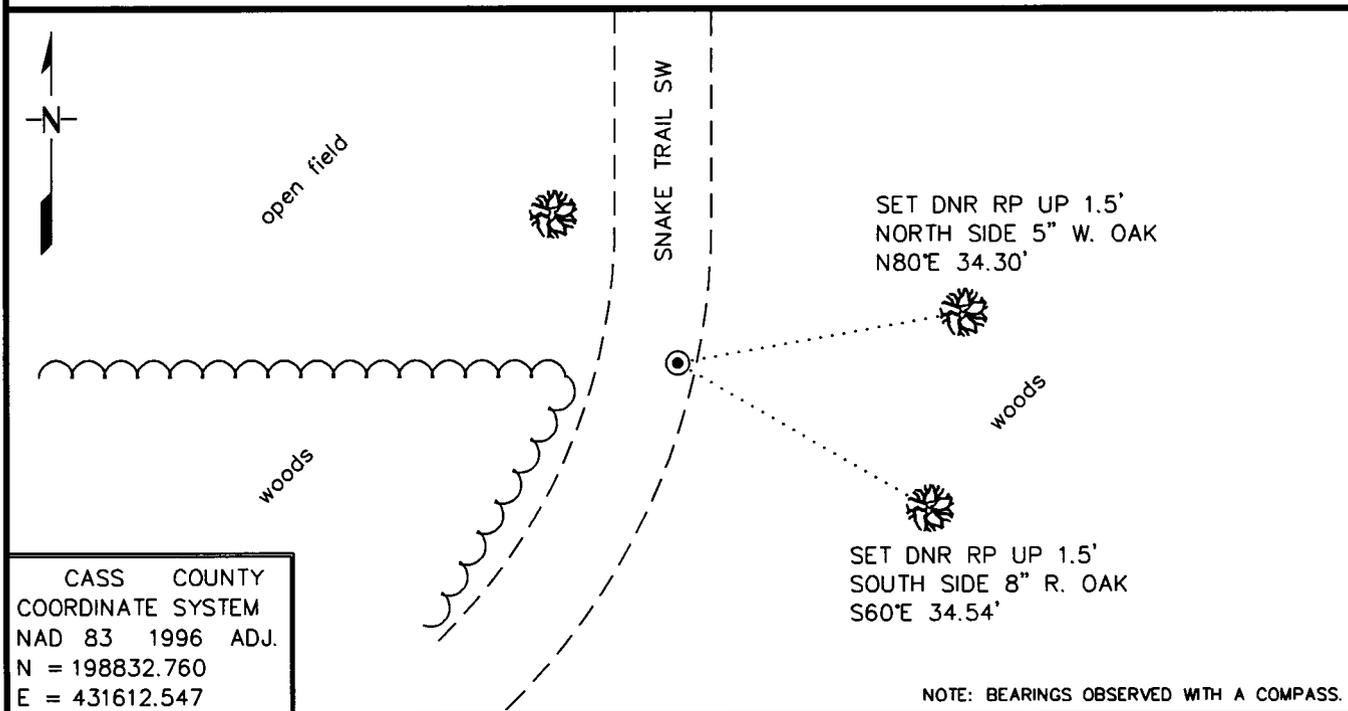

NOTE: BEARINGS OBSERVED WITH A COMPASS.

Statement of evidence for this corner location is on back of this page.

RAL - JUNE 2011
FOM01910.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE Robert J. [Signature] DATE 4/24/13 License Number 47461

Title: Land Surveyor County Surveyor

STATEMENT OF EVIDENCE**Northeast Corner of Section 17, Township 134 North, Range 32 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

Cass County Recorder
 Cass County Surveyor
 Cass County Highway Dept.
 Westwood Professional Services - Brainerd
 Carnell Land Surveying, LLC
 Arro of Park Rapids, LLC
 Nyberg Surveying
 Festler Land Surveying
 Kramer Leas Deleo, PC
 Widseth Smith Nolting - Baxter

1870 This corner was established by the Government Land Office. A post was set to mark the corner and was witnessed by the following bearing trees:

N. Pine	20"	N33°W	36 Links
N. Pine	17"	N23 ½°E	33 Links
N. Pine	24"	S87°W	17 Links
Dead Pine	14"	S44°E	20 Links

2005 A worksheet obtained from Westwood Professional Services of Brainerd show a computed position for this corner on the centerline extension of a road north and proportionally between found iron pipe monuments at the Northeast corner of Section 8 and the Southeast corner of Section 17. They measured 5366.39' north and 5366.42' south.

2011 In March, the DNR survey crew searched for evidence of the corner found a capped ½" iron pipe down 0.5' at the east edge of a township road in a curve, 3' east of the southerly extension of the centerline of the road north. No other evidence of the corner was recovered. The DNR measured 5374.46' to a found capped iron pipe at the northeast corner of Section 8 and 5358.52' to a found capped iron pipe at the southeast corner of Section 17. After analysis, the iron pipe was accepted as marking the corner location and ties were taken.

East Quarter Corner Section 17 bears S00°09'55"W 2679.26'
 East Quarter Corner Section 8 bears N00°19'34"E 2695.29'
 North Quarter Corner Section 16 bears N89°37'07"E 2704.93'

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

