

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner of Section 7, Township 139, Range 31, 5TH P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 09-03-09 placed a 5/8 rebar at the corner with a yellow plastic cap stamped "MN LS 40035."

SKETCH OF REFERENCE TIES

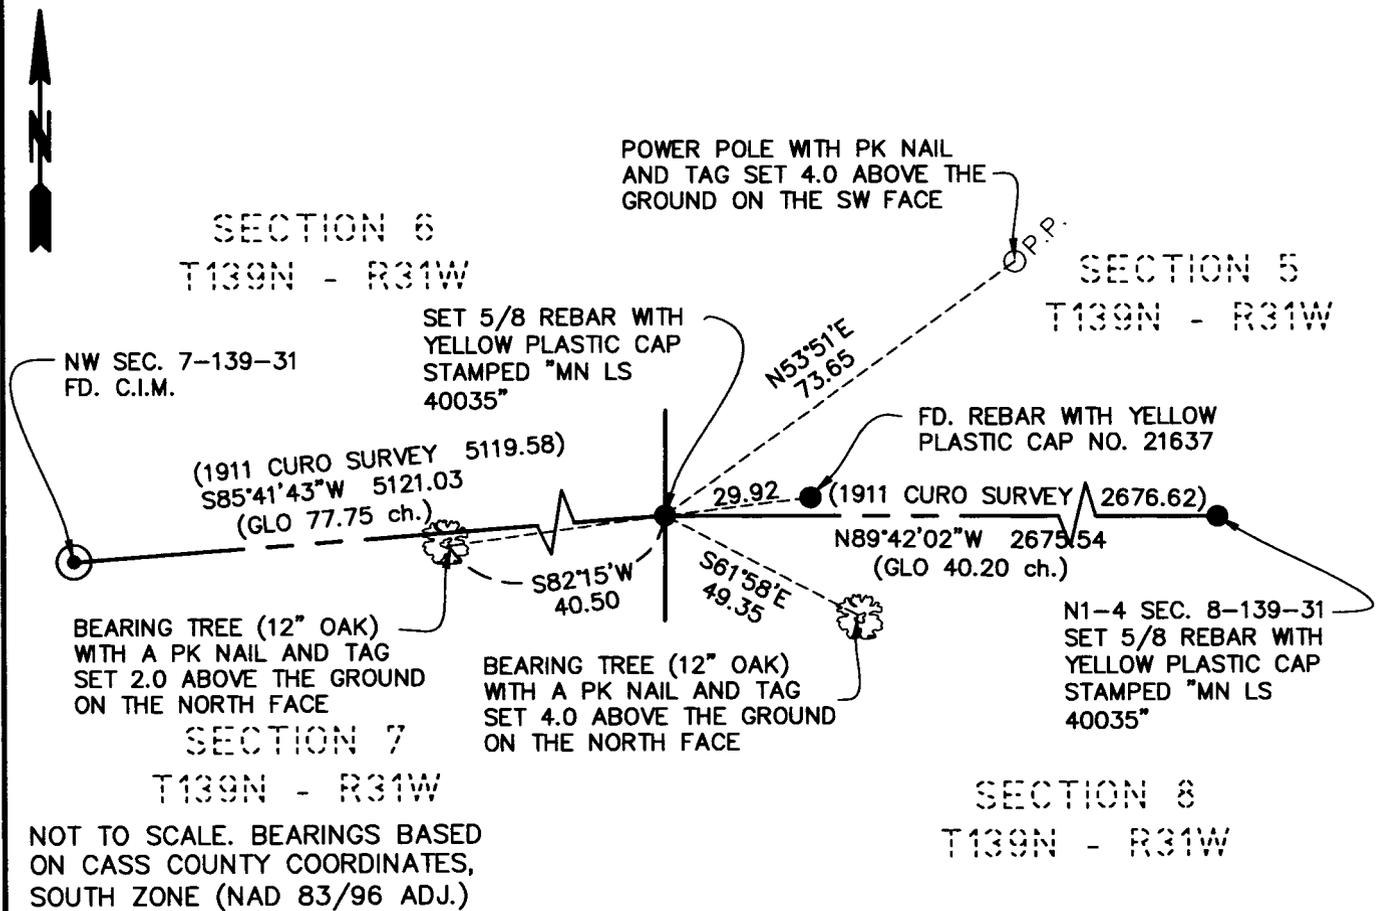

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Muel J. Carr 11-6-09
SIGNATURE DATE

Registration No. 40035

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer



A000592264

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/7/2013 10:39:26 AM

AS DOC #: A000592264

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000592264

STATEMENT OF EVIDENCE

The Northeast Corner of Section 7, Township 139 North, Range 31 West of the 5th Principal Meridian.

This corner was originally a wood post set by the Government Land Office in 1870.

In 1911, Mr. John Curo, Cass County Surveyor, found evidence of the three original bearing trees and set a 2" iron pipe. (Book A of Surveys page 315)

In September 2009, a survey crew from Ulteig Engineers searched for the Curo iron pipe and bearing trees but did not find evidence of either. An iron pipe with a plastic cap stamped "RLS 21367" was found east of our calculated position as shown on Certificate of Location of Government Corner filed under Doc. No. A000515673.

This corner was computed using Curo distances from other found Curo monuments set at the same time. We set a rebar with plastic cap marked "MN LS 40035".

