

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter of Section 33, Township 134 N., Range 31 W., 5th P.M.

State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 4 Sept 2003 found a 2 inch ODIP with plumbers cap, down 0.2 foot,  
4 feet± North of centerline of old grade, 1 foot± East of fence.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_

SKETCH OF REFERENCE TIES  
NOT TO SCALE

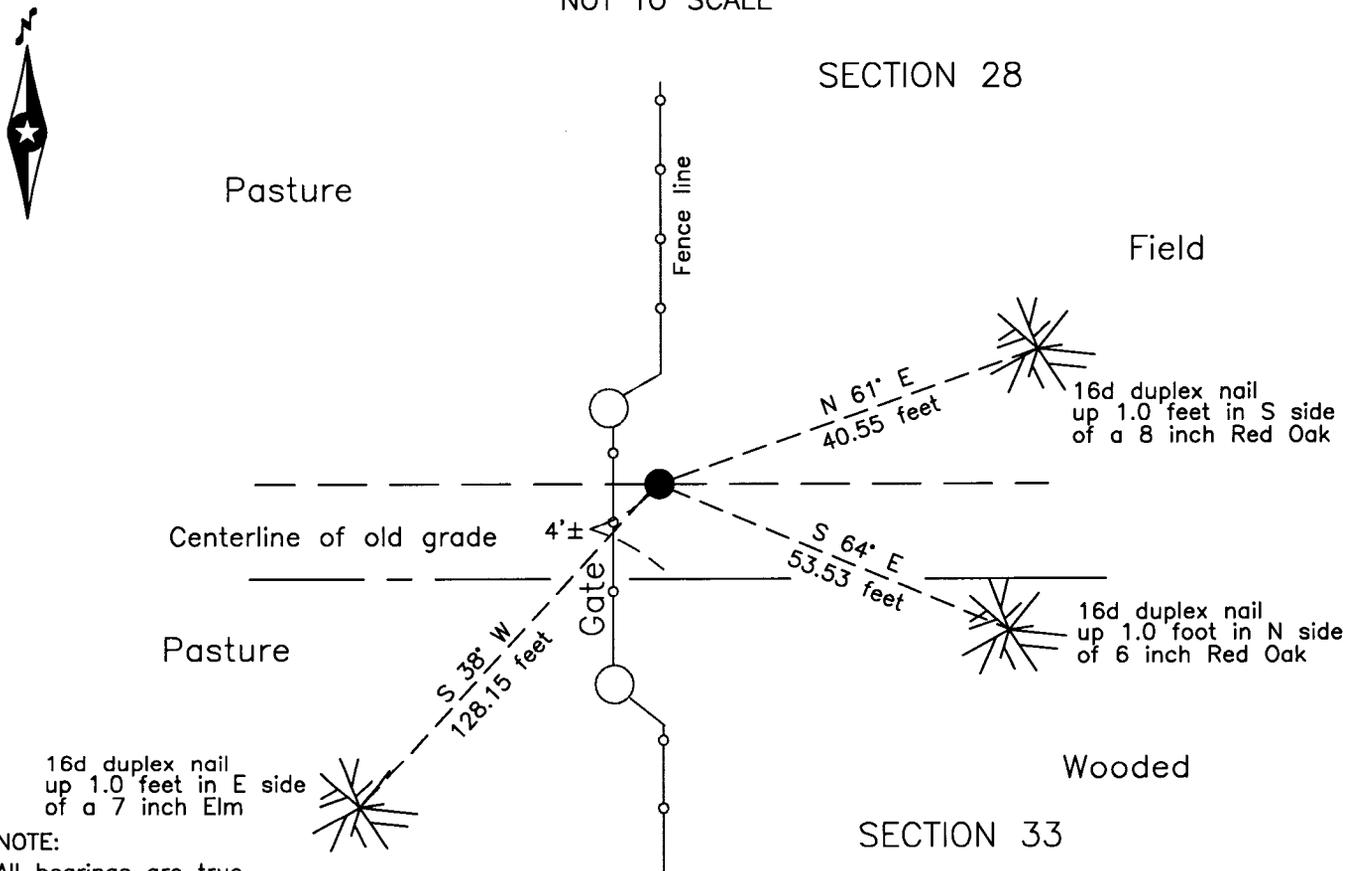

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 8/14/13 MN License No. 21367



**A000595682**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**8/22/2013 9:17:15 AM**

**AS DOC #: A000595682**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY KF Dep

Page 1 of 2 A000595682



**Index No. V.0-11.0**

Statement of Evidence

**North Quarter corner of Section 33, Township 134 North, Range 31 West, 5th Principal Meridian.**

June 1869 T.Walker, General Land Office (GLO) Deputy Surveyor set a post for the original corner in his subdivision of this township and referenced it as follows:  
5" Aspen N 82° E 130 links (85.8 feet) 14" Aspen S 18°30' E 140 links (92.4 feet)  
Said records are on file at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Surveyor's Office (CCSO).

June 1915 N.D.Gorman, Engineer, Survey Record No.335, Book B, page 489, on file in the CCSO, states "To establish ¼ corner between sections 28 & 33, at 7943.62 E, the ¼ corner sets South 23 feet."

Oct. 1986 T.Freeman, technician, CCSO, Land Corner Record, on file in the CCSO, states found a 2" capped iron pipe monument at a distance of about 5' North of the centerline of a trail going East to West. It was up 3". The following witnesses were established:

6" R.Oak	N 60° E	40.82 feet	Corner Fence Post	S 10° W	15.52 feet
12" B.Oak	S 25° E	83.08 feet	Survey Marker Sign	North	1.0 foot

April 1990 W.Curo, LS 11395, Cass County Surveyor, filed a Certificate of Location of Government Corner, on file in the Cass County Recorders Office and the CCSO, pertaining to the 1986 data, as Document Number 319819.

March 1998 D.Landecker, LS 17008, Certificate of Survey, on file in Pequot Lakes Office and the CCSO, indicates a monument found.

Sept. 2003 B.Hippen and T.Anderson, technicians, CCSO, notes on file in the CCSO, found a 2" ODIP, with plumbers cap, up 0.2 foot, 4.5 feet North of centerline of old grade and 1 foot East of fence across grade.

July 2013 B.Hippen, CCSO technician, records of the CCSO, found the monument and witnesses from 2003. The monument, recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCSO in 1986 is the accepted location of this corner.**

**County Coordinates (Cass County South)**

**Northing 182955.29**

**Easting 468609.39**