

Page 1 of 2 A000596601

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 9-03-13 License No: 41002
41002



A000596601

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

9/20/2013 9:22:53 AM

AS DOC #: A000596601

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep

South Quarter Corner of Section 32, Township 139, Range 27, 5th P.M.

On _____ found a _____


left monument as found, lowered monument, removed monument (explain)

On 4-25-2013 placed a 1/2"Ø x 18" iron pipe w/plastic cap stamped "RLS 41002", flush

SKETCH OF REFERENCE TIES

Corner Index: **Z-7**

Not to Scale

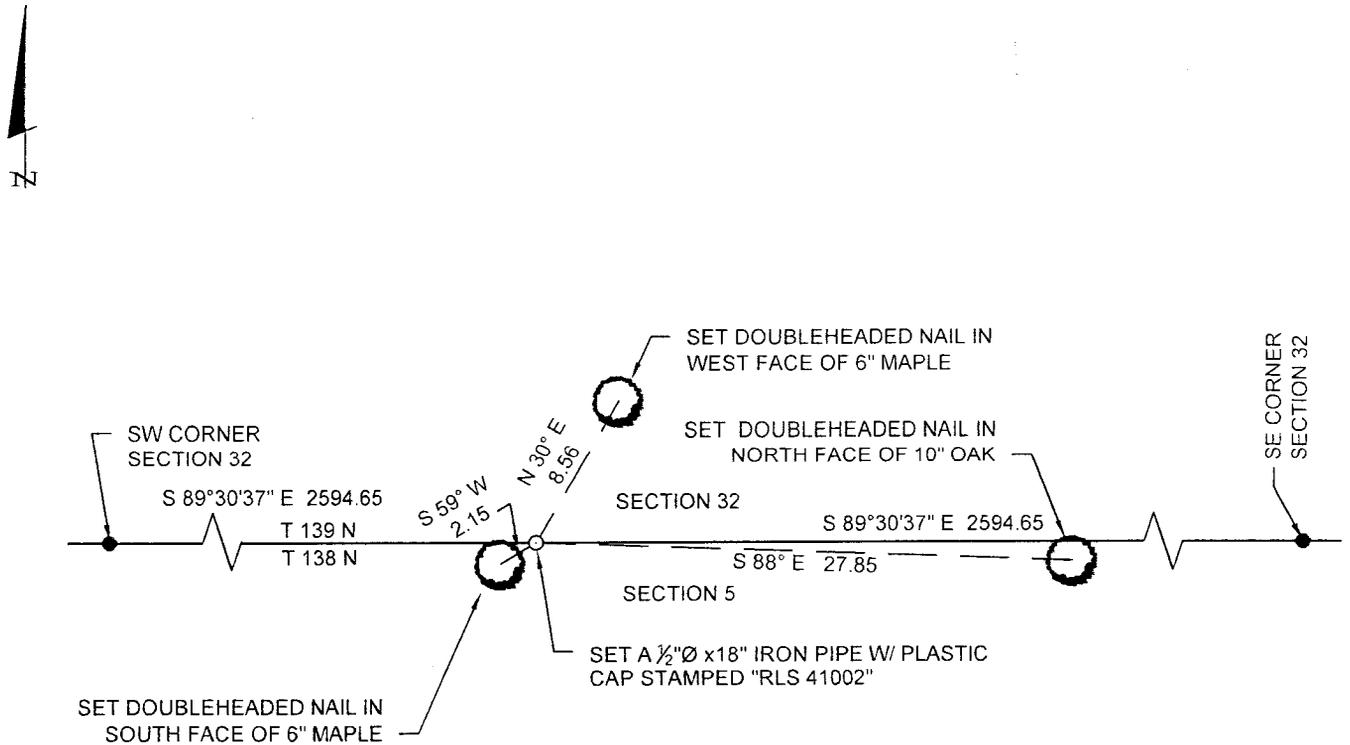

Statement of evidence for this corner position is on the back of this page



Statement of Evidence

South quarter corner, Section 32, Township 139 North, Range 27 West, 5th Principal Meridian, Cass County, Minnesota

1863 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

12" Aspen	N 20° W	20 links
12" Bl. Oak	S 22° W	19 links

1937 – CCC field book 2, page 5 indicates an approximate corner was set at distance of 40 chains from section corner to west.

1937 – CCC field book 10, page 19 indicates an approximate corner was set at distance of 2640 feet from section corner to west.

2013 – Patrick Trottier, PLS 41002, found no evidence of corner. Position was considered lost and established by single proportion method between found and accepted SW and SE corners of said section 32. Set 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" and established the following witnesses:

6" Maple	S 59° W	2.15 feet
10" Oak	S 88° E	27.85 feet
6" Maple	N 30° E	8.56 feet