

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard South Quarter Corner of Section 32  
Township 145 N , Range 26 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000599559

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/9/2014 1:30:09 PM

AS DOC #: A000599559

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep

On 3/1/2012, found a(n): 3.5" Brass Cap on 5' Iron Pipe  
Set In Concrete, 2.5' Above Ground


- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Swampy / Slough

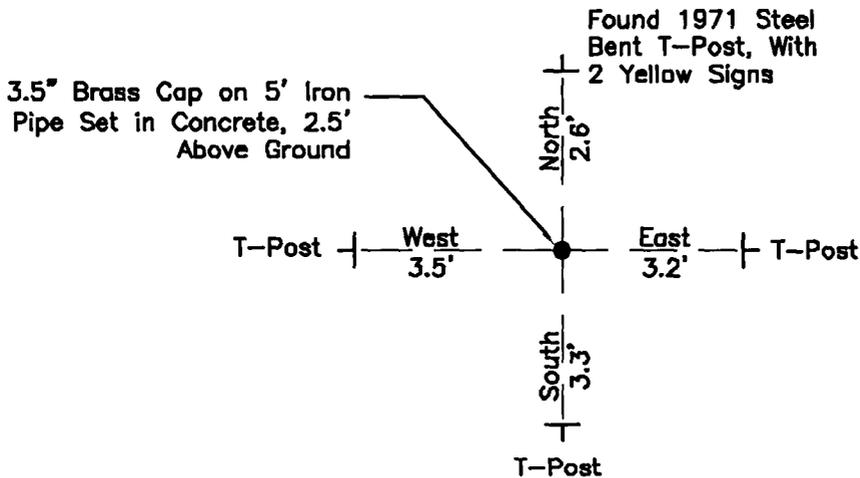


32

SC

NOTE FOR SOUTH TIE: By Looks Of Pipe, Water Is Sometimes Within 1' Of Top Corner Is 12'± North From Pipeline In Berm

## "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17197431.127  
Easting: 1392653.490

NAD 83/1996 Adjustment.  
Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/6/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000599559



**STATEMENT OF EVIDENCE:** Standard South Corner common to Section 32 of Township 145 North,  
Range 26 West of the 5<sup>th</sup> Principal Meridian

**1871;** G.R. Stuntz, for the Government Land Office established this corner and set a post and witnessed by:

Cedar 5" North 4<sup>o</sup> East, 89 Links  
Spruce 5" North 32<sup>o</sup> West, 58 Links

**1953;** Both the USFS 874 form, on file at the USFS office in Cass Lake, MN, and the Resurvey of 1953 notes, USFS notes Book 2 of Township 144 North, Range 26 West, page 25, show that R.W. Fassett, USFS, set a 4" treated post 3½" above the ground scribed "¼ S 32" in a swamp. Established by proportional measurement witnessed by:

Set FSLP tag Tamarack 8" South 20<sup>o</sup> West, 12'

**1971;** Both the USFS notes Book 2 of Township 144 North, Range 26 West, page 25, and the Cass County Certificate of Location of Government Corner Document No. 246279 (filed in 1978 by Milo Stefan, RLS #12261), indicate that Curtis Krause, while working for William Okerman, RLS #6807, found a 4" treated post scribed "¼ S32." He then set a 2" dia. 5' long galvanized steel pipe, filled with concrete and capped with a 3" dia. brass cap stamped "RLS No. 6807" witnessed by:

FSLP on a Tamarack 8" South 20<sup>o</sup> West, 12' (1953 Tie)  
Cedar 6" North 62<sup>o</sup> West, 27.2' scribed SC¼ S32 B.T.  
Cedar 7" North 25<sup>o</sup> West, 26.2' scribed SC¼ S32 B.T.  
Tamarack 7" North 51<sup>o</sup> East, 13.6' scribed SC¼ S32 B.T.  
Set 72" Steel Post East, 2.2' FS 54-2 and 54-4 signs attached  
Treated Post 4" North, 1.9' FS 54-2 sign attached

**2012;** Kadrmas, Lee & Jackson survey crew found a 3-1/2" brass cap on a 5' iron pipe set in concrete, 2.5' above ground, witnesses found and established as shown on the face of this certificate. Existing ties may have been destroyed by the pipeline construction.

**2012;** Ross Wamre, PLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office