

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 26
Township 145 N, Range 29 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000600797

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/6/2014 11:51:25 AM

AS DOC #: A000600797

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

On _____, found a(n): _____
DATE




- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 7/19/2012, set a(n): 5/8" x 4' Rebar with a 3.5" Aluminum Cap, 0.8' above ground with a fence post on the North side
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

Note: All Trees Blazed

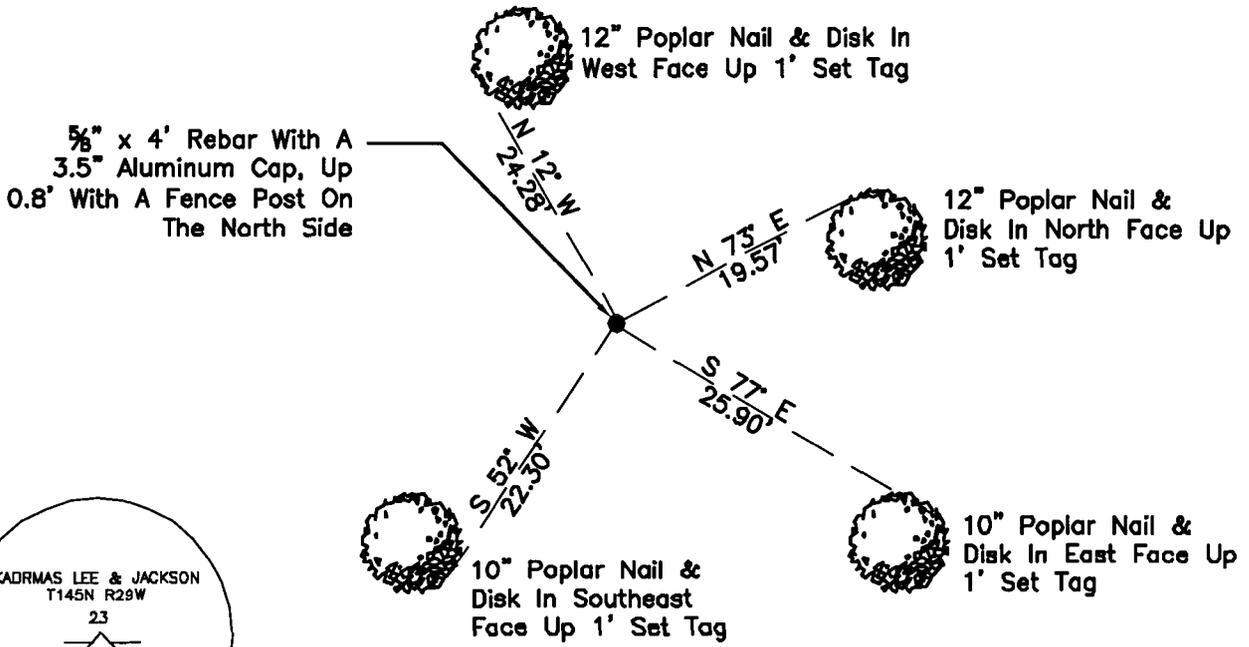

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17209034.610

Easting: 1313102.900

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/24/13
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 23 and 26 of Township 145 North, Range 29 West of the 5th Principal Meridian.

1874; This corner was originally established by P. H. Conger, his field notes indicate that this corner was marked by a post and witnessed by:

Black Pine 8" North 10° West, 13 Links
Yellow Pine 4" South 6° West, 7 Links

1974; GLO Dependent Resurvey of a portion of the East Boundary and Sub divisional Lines and the Survey of the Subdivisions in Section 25, Township 145 North, Range 29 West shows the north line of Section 26 recovered between Meander Corner No. 3 and the Northeast Corner of Section 26. However no reference is made to this corner location being recovered or searched for.

2010; A Kadrmas, Lee & Jackson survey crew found no evidence of this corner location

2012; Ross Wamre, RLS# 45334, set a 5/8" x 4' Rebar with a 3 1/2" Aluminum Cap up 1.0' at a location calculated from the Dependent resurvey plat using the angle from the recovered east lines of Sections 23 and 26, GLO distance westerly. Meander Corner # 3 to the west was not recovered in field search. Witnesses found and established as shown on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office