

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31  
Township 145 N, Range 27 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000600929

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

3/13/2014 11:37:32 AM

AS DOC #: A000600929

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


On 10-30-2012, found a(n): 3" Brass Cap On 2-1/2" Galvanized Pipe Up 2' In Swamp

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument


On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

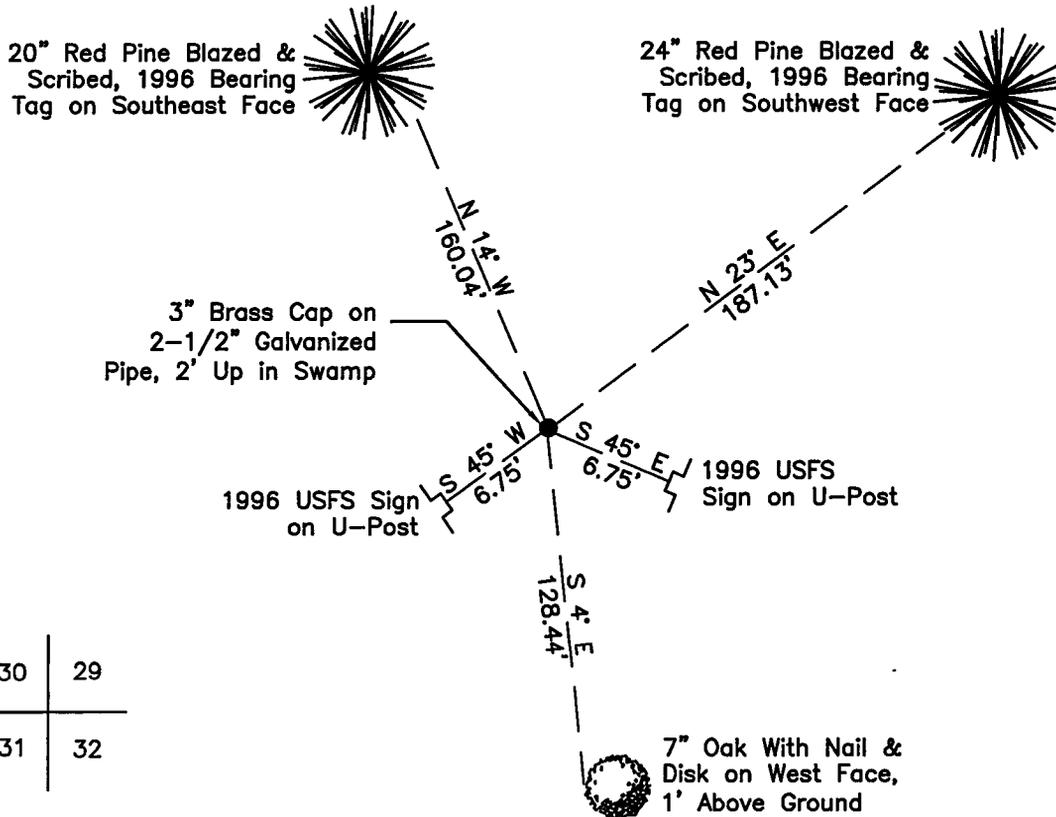

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17203481.170

Easting: 1358515.476

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/26/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600929



**STATEMENT OF EVIDENCE:** Corner common to Sections 29, 30, 31 and 32 of Township 145 North,  
Range 27 West of the 5<sup>th</sup> Principal Meridian

**1873;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

White Pine 8" South 14° East, 260 links  
Norway Pine 10" South 27° West, 268 links  
Jack Pine 12" North 3° West, 245 links

**1929;** Both the USFS 874 form, on file at the USFS office in Cass Lake, MN, and the USFS notes Book 2 of Township 145 North, Range 27 West, page 36, indicate that Edward Iverson, Estimator, and Earl M. Handy, Chief of Party, found a squared stake 4" x 4" x 24" in the middle of a small grass swamp/meadow 4 chains wide x 4 chains long. No Scribe. Witnessed by:

Placed a FSLP on a Norway Pine 10" South 60° East, 2 chains  
FSLP on Highway #8 North, 4 chains

**1942;** CCC Book No. 17, Page 32 show that a 4" X 60" post was set at the approximate corner witnessed by:

FSLP on Norway Pine 14" South 52° East, 130.7'

**1946;** State of Minnesota Department of Highways Right-of-Way Map Index file 13-12 shows a squared wood post in place at this corner location. Information is on file with the Minnesota Department of Transportation.

**1996;** USFS notes Book 2 of Township 145 North, Range 27 West, page 36, indicate that Rob Main, Gary Brama and Curt Krause found a 4" x 24" post. They also found a very rusted tag at the base of a Stump. They set a 2 ½" x 5' Iron Pipe 1.6' above ground with brass cap marked "USFS 1996" in place of 4" pine post witnessed by:

Norway Pine 13" North 14° West, 160.04' – mkd. S30 BT  
Norway Pine 19" North 23° East, 187.13' – mkd. S29 BT  
Set 8' Steel Post South 45° East, 6.75' 36" High  
Set 8' Steel Post South 45° West, 6.70' 36" High  
Set a 4" pine post at North side of monument  
Set a 3" x 5' aspen post at East side of monument  
Set a 3" x 3½' aspen post at South side of monument

Woods Trail NW-SE is 180' north of corner. Corner is in grass marsh.

**2010;** A Kadrmas, Lee & Jackson survey crew, found a USFS 3 ½" Brass Cap 23 ½" above the ground, witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office