

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 32  
Township 145 N , Range 27 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000600932

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

3/13/2014 11:37:35 AM

AS DOC #: A000600932

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep


On 05/19/2010, found a(n): 2.5" Iron Pipe with 3" Brass Cap,  
DATE  
2.5' above ground stamped RLS# 3628 Set in 1962

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

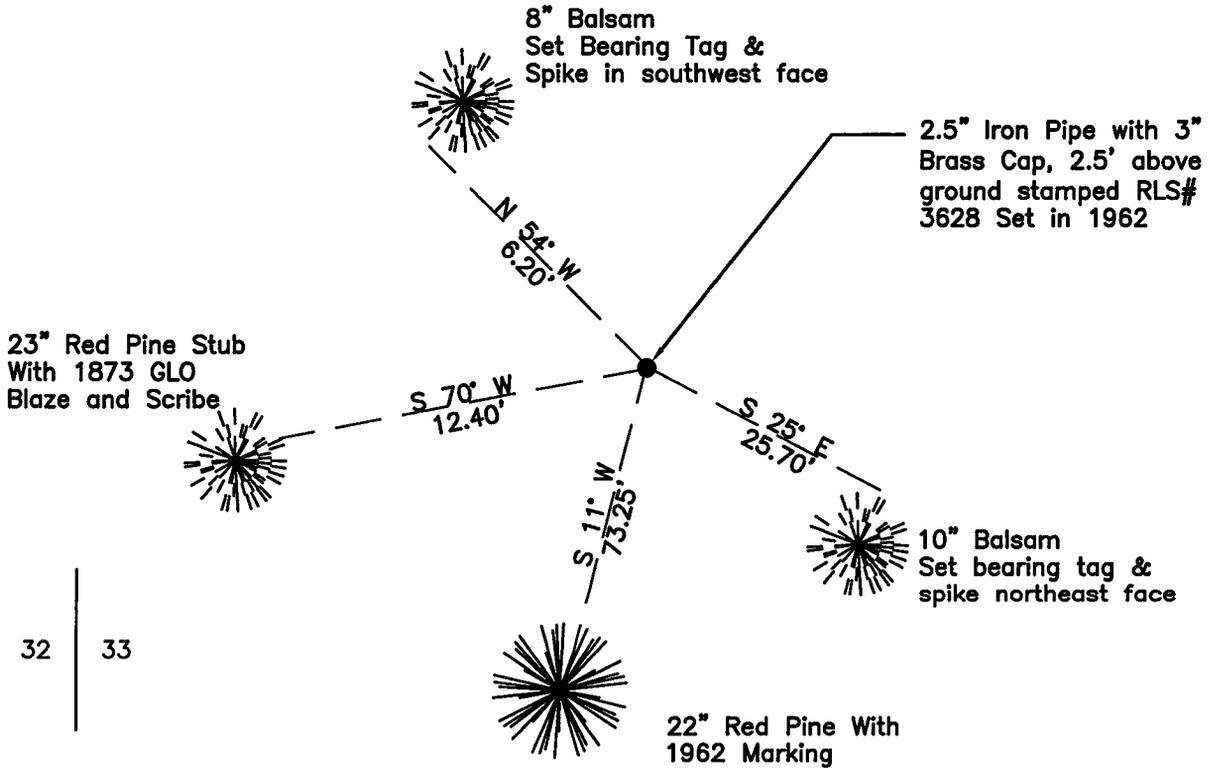

32 | 33



### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17200548.350

Easting: 1363736.043

NAD 83/1996 HARN Adjustment.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

6/27/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000600932



**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 32 and 33 of Township 145 North,  
Range 27 West of the 5<sup>th</sup> Principal Meridian

**1873;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

Norway Pine 18" South 65° West, 20 links  
Poplar 12" South 10° East, 19 links

**1924;** H.A. Brills, Chief of Party, USFS 874 forms, recovery a wooden stake in good condition witnessed. Information on file with the USFS office in Cass Lake.

Norway Pine 27" South 66° West, 25 links (1873 tie)  
Spruce 12" South 23° West, 60 links

Brills notes that the Norway Pine bearing tree recovered is the GLO BT, but the stake is not original.

**1928;** Leadbeater and Kirkmire, Book 1 of Township 145 North, Range 27 West, page 35, recovery a wooden stake in good condition with blazed lines to the south and north, witnessed.

Norway Pine 22" visible scribe "¼ S"  
Dead tree 27" South 66° West, 25 links (1873 tie)  
Spruce 12" South 23° West, 60 links

**1962;** R.H. McDonald, Pete Meyer, RLS# 3628, USFS Book 1 of Township 145 North, Range 27 West, page 35, found 1873 Red Pine stub and set new monument at record bearing and distance. Set a 2" inside diameter 5' long galvanized wrought iron pipe filled with concrete and capped with a 3" diameter stamped bronze tablet witnessed. An affidavit as to the location of the Government Corner is on file with Cass County Surveyor's Office.

Norway Pine 23" South 65° West, 13.2' (1873 Tie)  
Cedar 15" North 35° East, 134.3' - mkd. ¼ S33 BT  
Cedar 12" South 81° East, 68.6' - mkd. ¼ S33 BT  
Red Pine 20" South 10° West, 74.3' - mkd ¼ S32 BT  
Steel sign post 72" long set 24" in ground with signs 54-2 and 54-4, North 5.6'

**1966;** S.M. Morrison, USFS Book 1 of Township 145 North, Range 27 West, page 35, recovered iron pipe with brass cap witnessed by:

Cedar 12" South 81° East, 68.6' (1962 tie)  
Cedar 14" North 35° West, 134.3' (1962 tie)  
Red Pine 22" South 10° West, 74.3' (1962 tie)  
Birch 9" South West, 14.0' with location poster

**1982;** Glenn P. Kasenko, USFS Book 2 of Township 145 North, Range 27 West, page 2, recovered 2 ½" iron pipe with a brass cap, 1.8' above ground witnessed by:



1873 Red Pine Stub 23" South 70° West, 12.40' - scribe ¼ S BT visible  
1962 Cedar 20" North 37° East, 133.24' - scribe visible  
1962 Cedar 16" South 81° East, 67.90' - scar visible  
1962 Red Pine 22" South 11° West, 73.25' - scribe visible  
Sign post, North, 5.7' mon. sign attached

Placed nail in the side of each BT except the original red pine stub to measure from. Also 60d spike in base blaze of each BT.

**2010;** A Kadrmas, Lee & Jackson survey crew, found a 2.5" Iron Pipe with a 3" Brass cap and two previous bearing trees. Witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Engineers Office  
Cass County Surveyors Office  
Northern Engineering and Consulting Inc.  
United States Forest Service  
MnDOT – District Office 2  
Bureau of Indians Affairs – Bemidji  
Bureau of Land Management's (BLM) Northeastern States Field Office