



A000600934

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

3/13/2014 11:37:37 AM

AS DOC #: A000600934

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 36
 Township 145 N, Range 27 W, 5th P.M.
 STATE OF MINNESOTA, COUNTY OF CASS


On _____, found a(n): _____
DATE

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 2/22/2012, set a(n): 3-1/2" Brass Cap On 3/4"x 4' Iron
DATE
Pipe, 2" Out Of Ground On South Facing Slope 40'± North Of Swamp In
Red Pine Plantation

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

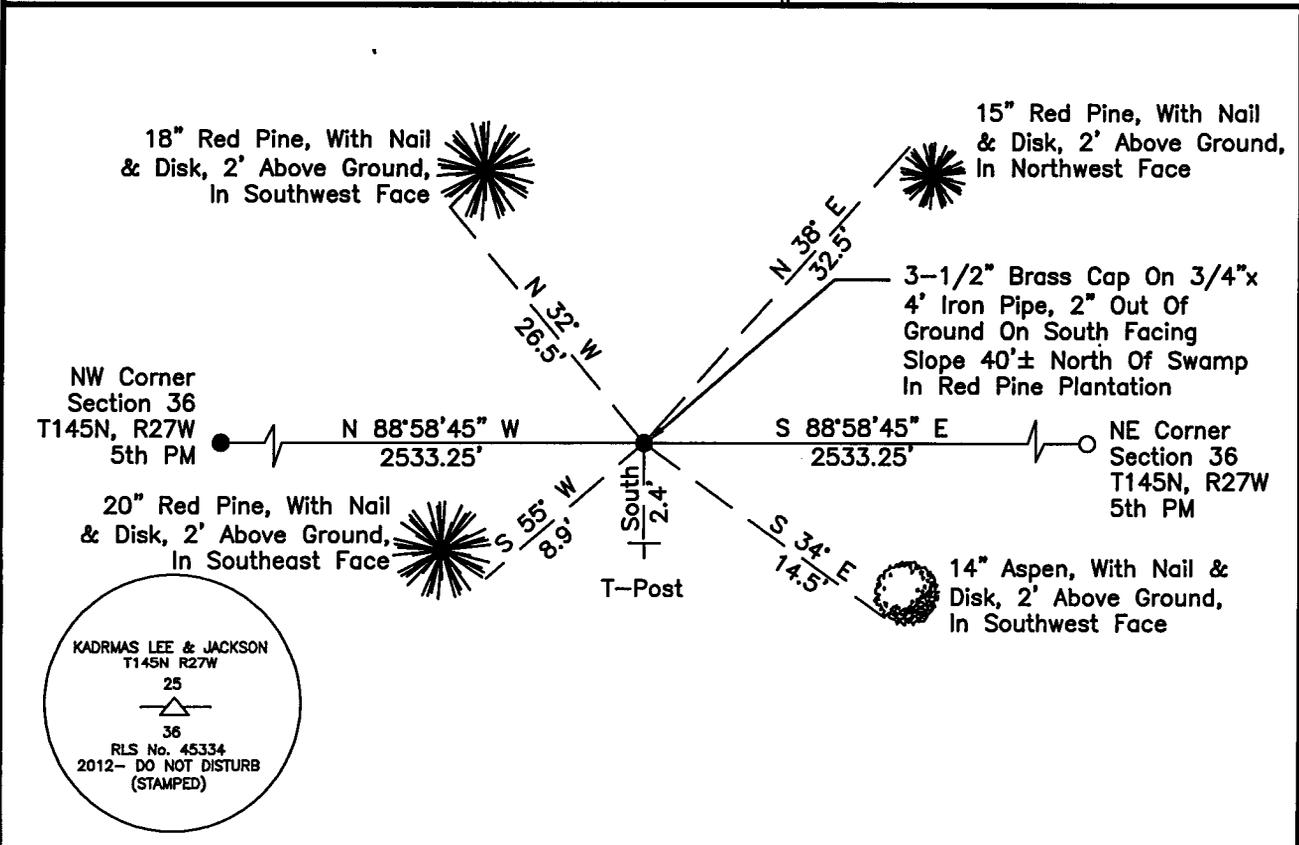

"SKETCH OF REFERENCE TIES"
 (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15
 Northing: 17202900.700
 Easting: 1382113.814

NAD 83/1996 Adjustment.
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre signature 6/25/13 date
 Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 25 and 36 of Township 145 North,
Range 27 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

Jack Pine 4" North 48° West, 12 links
Jack Pine 4" South 42° East, 10 links

1924; CCC notes of the National Forest in Township 145 North, Range 27 West, on file with the USFS show that Hiram K. Wright, Forest Ranger, found a jack pine stake 4' high, marked ¼ sec witnessed by:

Jack Pine 8" in Sec 25
Jack Pine 6" in Sec 36

1936; USFS 874 form on file at the USFS office in Cass Lake, MN, shows a found old corner with one big poplar near corner. No other information given.

2010; A Kadrmas, Lee & Jackson Survey crew completed a field search for this corner position and found no evidence of this corner.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information set a 3 ½" Brass Cap on a ¾"x 4' Iron pipe, 2" above ground at a lost single proportionate measurement location between the reestablished Northeast Corner of Section 36 and the recovered Northwest Corner of Section 36. Witnesses established as shown on face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office