



A000600963

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/13/2014 2:50:10 PM

AS DOC #: A000600963

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER
BY SR _____ Dep

Page 1 of 2
A000600963

Index No. MN-25

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner #4 Corner of Section 13
Township 145 N, Range 31 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF Cass


On 4/12/2010, found a(n): 6" Concrete Monument With A
3.5" Brass Cap

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

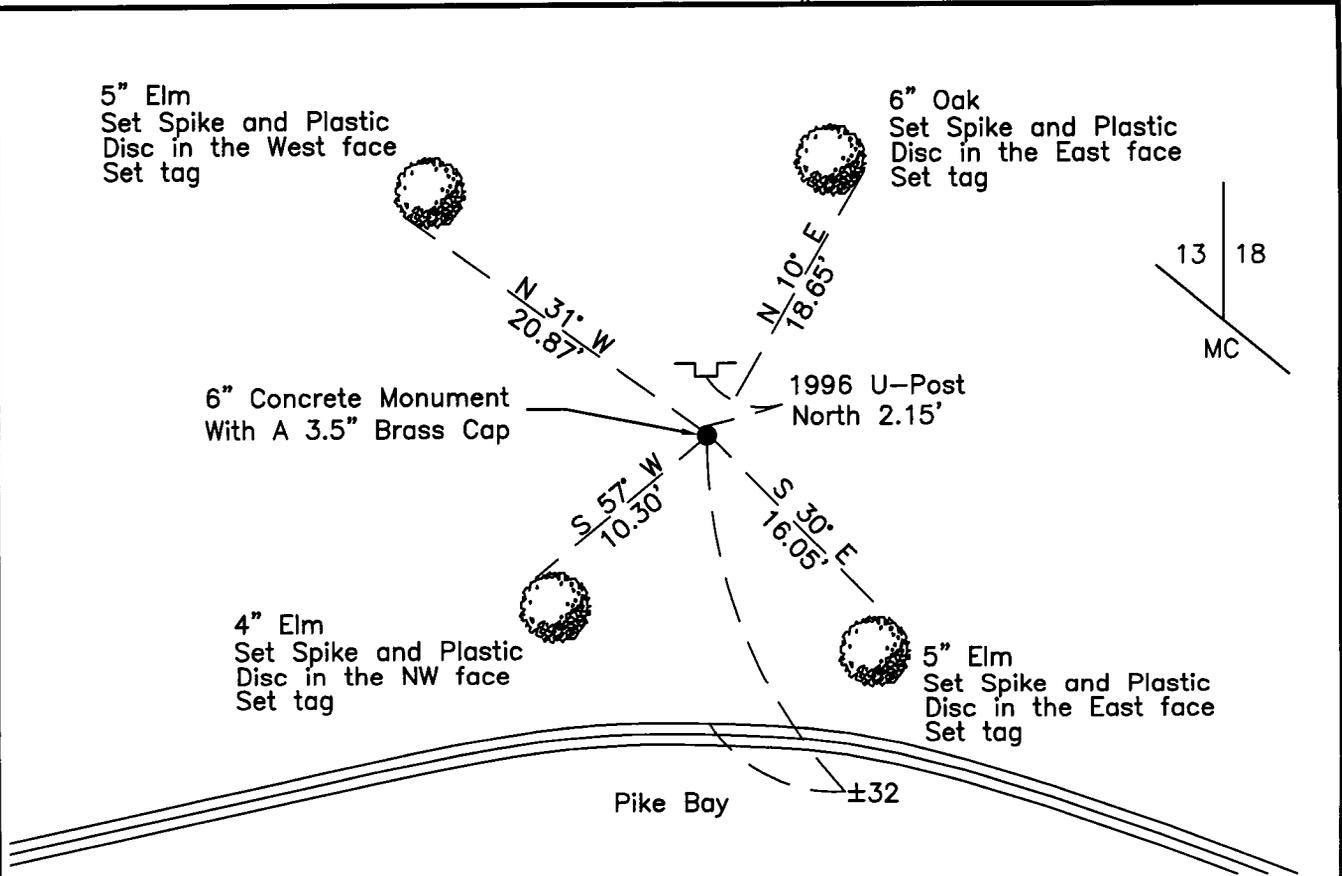

"SKETCH OF REFERENCE TIES"
(not to scale - bearings are magnetic)

Ties are measured to center of monument
unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15
 Northing: 17216404.620
 Easting: 1258064.191

NAD 83/1996 Adjustment.
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre signature
 Ross Wamre, Minnesota License No. 45334

3/1/14 date



STATEMENT OF EVIDENCE: Meander Corner #4 common to Section 13 of Township 145 North, Range 31 West and Section 18 of Township 145 North, Range 30 West of the 5th Principal Meridian

1875; This corner was originally established by Patrick H. Conger his field notes indicate a post set at this corner position witnessed by:

Poplar 8" North 1° West, 36 Links
White Oak 10" North 85° East, 40 Links

Information on file in the Secretary of State Office and copies at the Cass County Highway Department.

1900; US Army Corps of Engineers map of the Leech Lake & Lake Winnibigoshish Reservoirs shows this corner as found. Map is on file at the USFS office in Cass Lake, MN.

1933; GLO notes of the Resurvey of 1933 show that Willis W. Bandy found no evidence of the original corner. He set a 2' long, 6" diameter concrete monument with stamped 3" diameter Brass Cap and witnessed by:

Burr Oak 4" South 45° East, 38 Links
Burr Oak 5" North 35½° West, 23 Links

Information on file in the Secretary of State Office and copies at the Cass County Highway Department.

1934; USFS 874 form, on file at the USFS office in Cass Lake, MN, shows that J.A. Gjelhaug, RLS# 1337, found a Brass Capped Monument set in 5" dia. of Concrete. 5" above the ground witnessed by:

White Oak 5" North 34° West, 22½ Links – mkd: M.C. T145N R30W S13 B.T. (1933 Tie)
White Oak 4" South 47° East, 37½ Links – mkd: M.C. T145N R30W S18 B.T. (1933 Tie)

Information on file in USFS office in Cass Lake

1946; State of Minnesota Department of Transportation Right-of-Way Plats No. 32-86 shows a Brass Cap Set in Concrete at this meander corner location. Information is on file with the Minnesota Department of Transportation.

1996; USFS notes Book 1 of Township 145 North, Range 30 West, Page 20, show that R. Main, USFS, found the GLO monument in place ±30' North of Lake Edge witnessed by:

White Oak 6" North 47° East, 14.85' to a spike
White Oak 11" North 28° West 14.99' to a spike, scribe overgrown (1933 Tie)
Placed an 8' Steel Sign Post 2.25' North

Information on file in USFS office in Cass Lake

2010; A Kadmas, Lee & Jackson survey crew found 6" concrete monument with a 3.5" brass cap, witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji