

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 15
Township 145 N , Range 30 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601385

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:29:56 AM

AS DOC #: A000601385

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/21/2010, found a(n): 1" Iron Pipe with a 2" Brass
Cap stamped 1933, 1.2' Above Ground

- left monument as found lowered monument
 removed monument (explain) raised monument


On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

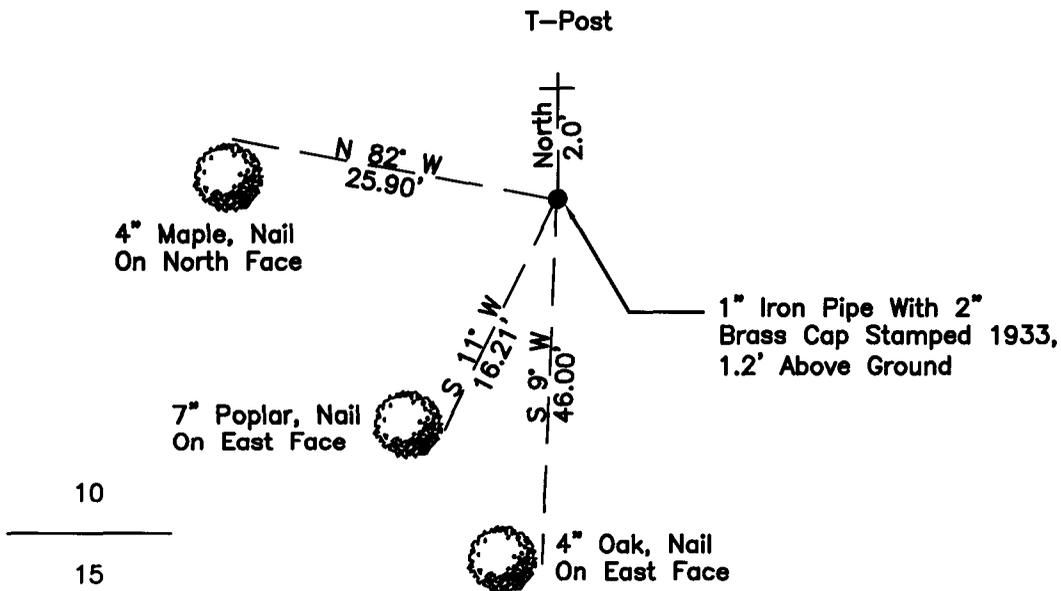

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17219834.490

Easting: 1276805.027

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 10 and 15 of Township 145 North,
Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a wood post set at this corner position, witnessed by:

Black Pine 10" North 73° West, 93 links
Black Pine 8" South 18° West, 37 links

1928; J.A. Donery, USFS 874 forms, found no stake but found a dead Jack Pine Scribed ¼ S.
Information on file with the USFS office in Cass Lake.

1933; Resurvey by GLO, Willis W. Bandy, from remains of original bearing trees set an iron post, 3' long, 1" diameter 27" in the ground with brass cap witnessed by:

Jack Pine 12" stump, North 71° West, 93 links (1874 tie)
Jack Pine 12" snag, South 20 ½ ° West, 37 links (1874 tie)

New BTs

Jack Pine 3" North 39 ¼° East, 31 links - mkd BT
Norway Pine 19" South 49 ½° West, 78 links - mkd ¼ S15 BT

2010; A Kadrmas, Lee & Jackson survey crew found a 1" Iron Pipe with a 2" brass cap stamped 1933, 1.2' above ground. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office