

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 24
Township 145 N, Range 30 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601402

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

4/3/2014 11:30:13 AM

AS DOC #: A000601402

PAGES: 3

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep


On 04/21/2010, found a(n): 1" Iron Pipe with a 2" Brass
Cap stamped 1933, 0.4' Above Ground

- left monument as found lowered monument
 removed monument (explain) raised monument

On _____, set a(n): _____

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

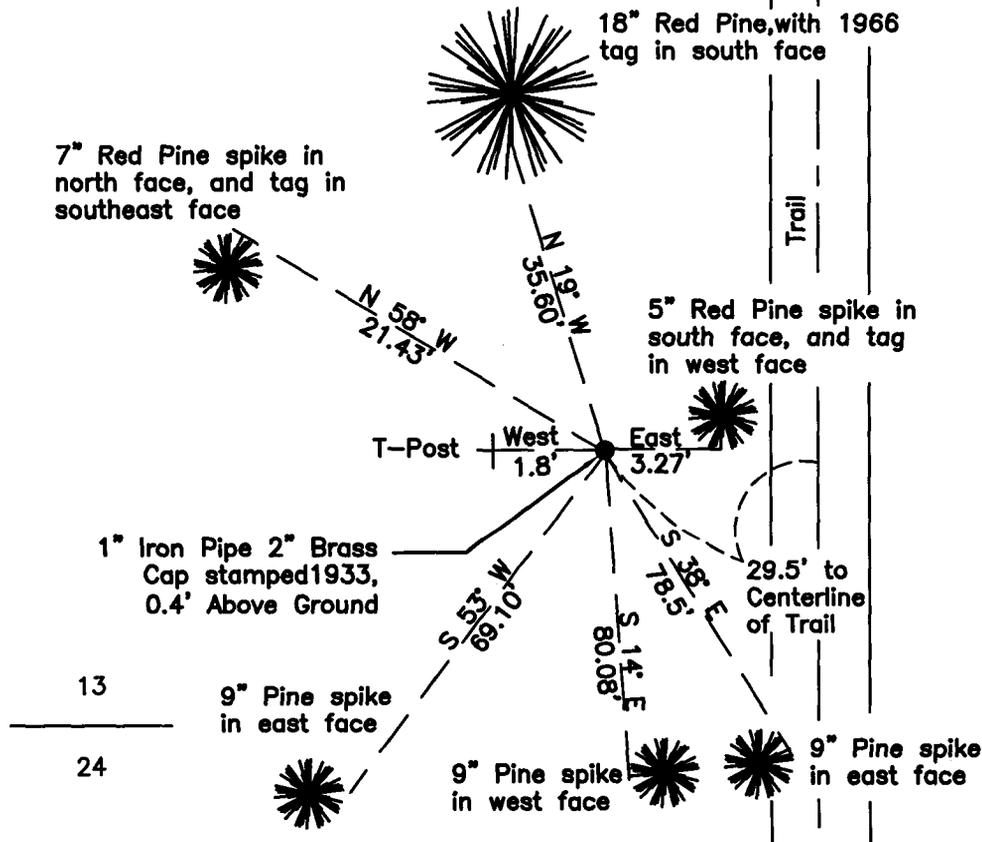

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17214432.040

Easting: 1286999.540

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

7/8/13
date

Ross Wamre, Minnesota License No. 45334





STATEMENT OF EVIDENCE: Quarter Corner common to Sections 13 and 24 of Township 145 North,
Range 30 West of the 5th Principal Meridian

1874; This corner was originally established by P.H. Conger for GLO. His field notes indicate a wood post set at this corner position, witnessed by:

Fir 4" South 86° East, 25 links
Blk Pine 8" North 2° East, 100 links

1903; U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 30 W flowage map for the Leech Lake and Lake Winnibigoshish Reservoirs. Map is on file at the USFS office in Cass Lake, MN.

1915; The GLO supplemental plat showing the subdivisions of lot 4, section 24, T 145 N, R 30 W, 5th P.M. shows a section breakdown for section 24

1933; Resurvey by GLO, Willis W. Bandy, found no evidence of post or bearing trees. Set by lost proportionate measurement, an iron post, 3' long, 1" diameter, 28" in the ground with a stamped brass cap, witnessed by:

Spruce 10" North 74° West, 12 links – 7.92 ft. mkd. ¼ S13 BT
N. Pine 8" South 21 ¾° West, 18 links – 11.88 ft. mkd. ¼ S24 BT

1936; Harold Hannes, USFS 874 forms, found a Capped Metal Pipe 6" above ground. Information on file with the USFS office in Cass Lake. Corner is witnessed by:

White Spruce 12" North 75° West, 13 Links scribed (1933 Tie)
Norway Pine 10" South 22° West, 18 Links scribed (1933 Tie)

1966; William H. Okerman, RLS #6807 and James Ebstrom, USFS Book 2, Township 145 North, Range 30 West, page 8, found monument in place along with 1933 BTs. An Affidavit as to Location of Government Corner is on file at the Cass County Office of Register of Deeds. Corner is witnessed by:

Spruce 15" North 74° West, 7.92 ft. (1933 tie) re-scribed
N. Pine 13" South 21° West, 11.88 ft. (1933 tie) re-scribed
New BT:
N. Pine 10" North 19° West, 35.6 ft. scribed

1976; Curtis Krause, USFS Book 2, Township 145 North, Range 30 West, page 8, found iron and cap, in place, in good condition 5" above ground. Corner is 35' west of woods road SW-E-NE.

N. Pine 14" South 21° West, 11.88 ft. (1933 tie) with 1936 USFS Sign 54-4
N. Pine 11" North 19° West, 35.6 ft. (1966 tie)

2010; A Kadrmas, Lee & Jackson survey crew found a 1" Iron Pipe with a 2" Brass cap standard GLO monument stamped 1933, 0.4' above ground. Witnesses found and established as shown on the face of this certificate.



2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office