



A000607944

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/4/2014 1:17:39 PM

AS DOC #: A000607944

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Twp 143 Rge 27 Index No. A.0-21.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 2, Township 143 N., Range 27 W., 5th P.M.


State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 28 Jan 2009 found a 6 inch concrete cylinder with brass cap, up 0.5 feet.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

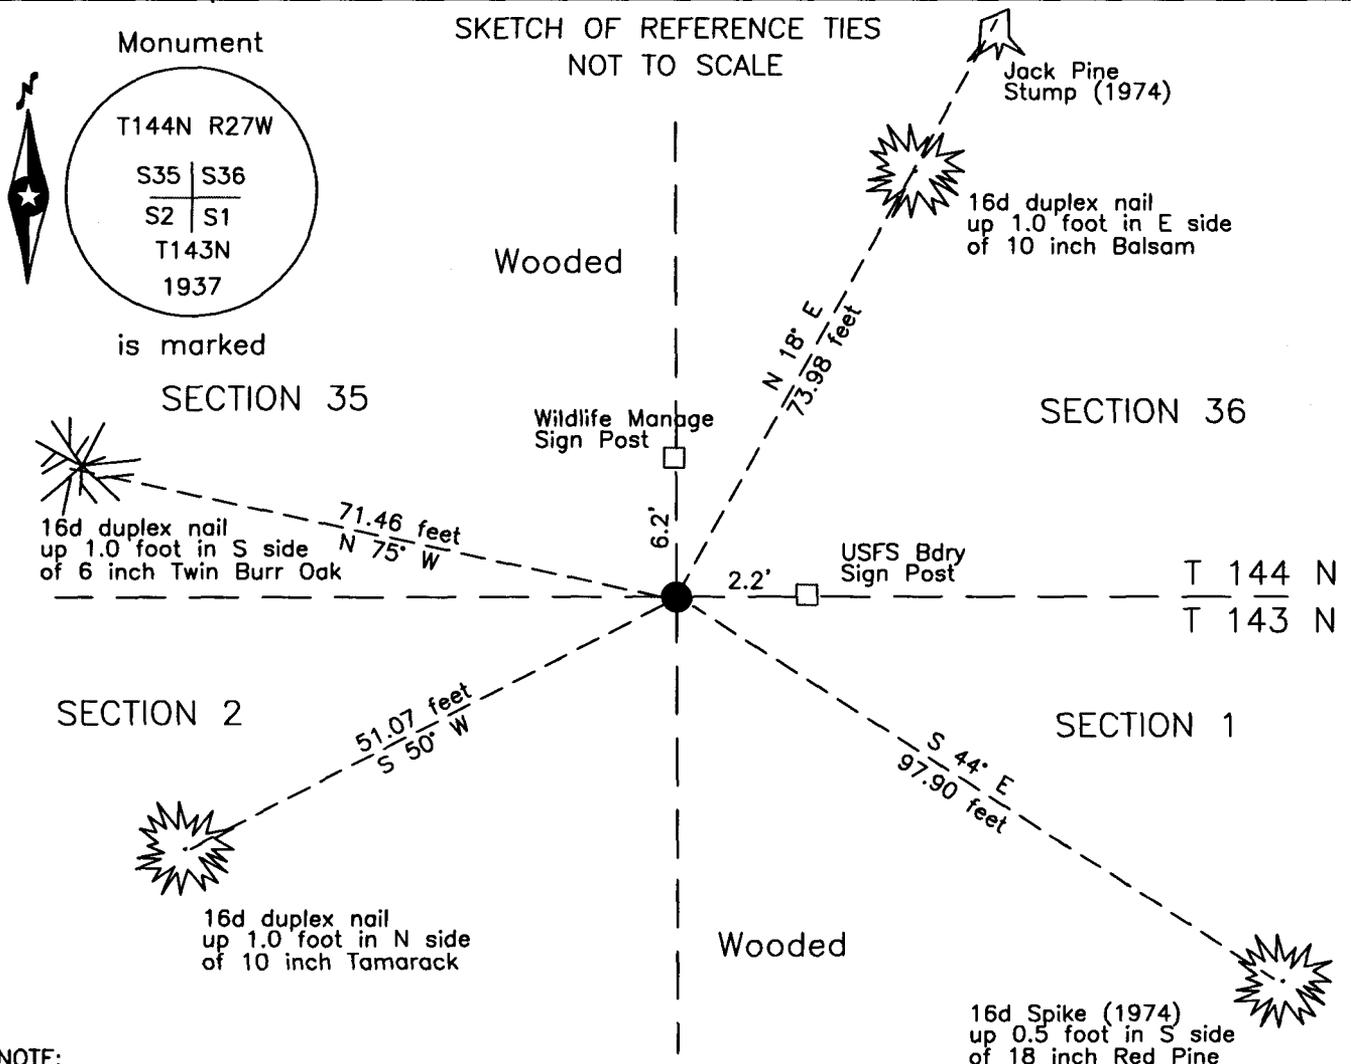

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 12/3/14 MN License No. 21367

**Index No. A.0-21.0**Statement of Evidence**Northeast corner of Section 2, Township 143 North, Range 27 West, 5th Principal Meridian.**

- July 1873 P.H. Conger, General Land Office (GLO) Deputy Surveyor notes of the subdivision of Township 143 North, Range 27 West, set a post for the original corner and referenced it as follows:
 12" N. Pine S 20° W 17 links (11.22 feet) 16" N. Pine N 60° W 20 links (13.20 feet)
 7" Blk. Pine S 45° E 14 links (9.24 feet) 6" Blk. Pine N 40° E 13 links (8.58 feet)
 The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- April 1900 F.V. Abbot, Major, United States Army, Corps of Engineers (COE), Lake Pokegama Reservoir Map 143-27, on file with the United States Department of Agriculture, Forest Service (USFS) offices in Cass Lake, MN, by symbol indicates this to be a known corner. Book A1-233, page 41, indicates found stumps of all BT's.
- July 1937 H.D. Craig, U. S. Surveyor, GLO, Dependent Resurvey of Township 144 North, Range 27 West, on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the CCHD/SO, states "Set a concrete monument, 2 ft. long, 6 ins. diam., 20 ins. in the ground, for cor. of secs. 1, 2, 35 and 36, with a brass tablet" and lists the original witnesses as follows:
 12" Jack Pine stp. N 40° E 13 links (8.58 feet) Pine stump. S 45° E 14 links (9.24 feet)
 Pine stump S 20° W 17 links (11.22 feet)
 He lists the following new witnesses:
 7" Jack Pine S 53° E 76 links (50.16 feet) 10" Jack Pine N 31 1/4° E 74 links (48.84 feet)
 6" Tamarack. S 1° W 113 links (74.58 feet) 12" Jack Pine N 73 3/4° W 188 links (124.08 feet)
- 1960 USFS, Field Book #2, page 42, on file in the offices in Cass Lake, MN, notes only indicates the original GLO and 1937 GLO witnesses.
- April 1974 C.R. Krause, USFS, T144N-R27N, Field Book #1, page 71, on file in the offices in Cass Lake, MN, states "Found 6" con. Mon. in place 5" above grd. In good condition." List the following witnesses:
 12" burned J. Pine stump (chop marks) N 40° E 8.6 feet (1873)
 Fallen Jack Pine snag N 31° E 48.8 feet (1937) 13" Tamarack. S 1° W 74.6 feet (1937)
 8" Jack Pine snag S 53° E 50.2 feet (1937) 20" Jack Pine N 74° W 124.1 feet (1937)
 New witnesses as follows:
 15" N. Pine S 44° E 97.9 feet 7" J. Pine N 18° E 94.0 feet
 6" J. Pine N 43° W 79.9 feet 7" J. Pine S 71° W 57.1 feet
 Steel Sign Post East 2.2 feet
- Feb. 1980 M.E. Stefan, LS 12261, filed a Certificate of Location of Government Corner, on the 1974 information in the Cass County Recorders Office as Document Number 258576.
- Jan. 2009 B. Hippen, technician, records of the CCHD/SO, found the 1937 GLO 6 inch concrete cylinder with brass cap, up 0.5 foot and witnessed it as follows:
 J. Pine stump N 18° E 94.0 feet (1974) 18" N. Pine S 44° E 97.90 feet (1974)
 10" Balsam N 18° E 73.98 feet 6" Twin B. Oak N 75° W 71.46 feet
 10" Tamarack S 50° W 51.07 feet Steel Sign Post North 6.2 feet
 Steel Sign Post East 2.3 feet (1974)

The recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by the CCHD/SO in 2009 is the correct perpetuation for this corner.

County Coordinates (Cass County North)

Northing 259608.42

Easting 541224.95