



A000611516

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/7/2015 10:09:32 AM

AS DOC #: A000611516

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 122603

Page 1 of 2 A000611516

Twp 137 Rge 32 Index No. G.0-25.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 12, Township 137 N., Range 32 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found \_\_\_\_\_

left monument as found     lowered monument     removed monument (explain)

On 20 Mar 2015 placed a 1.25 inch iron pipe with plastic cap RLS 21367,  
up 0.5 foot, on a side slope.

#### SKETCH OF REFERENCE TIES NOT TO SCALE

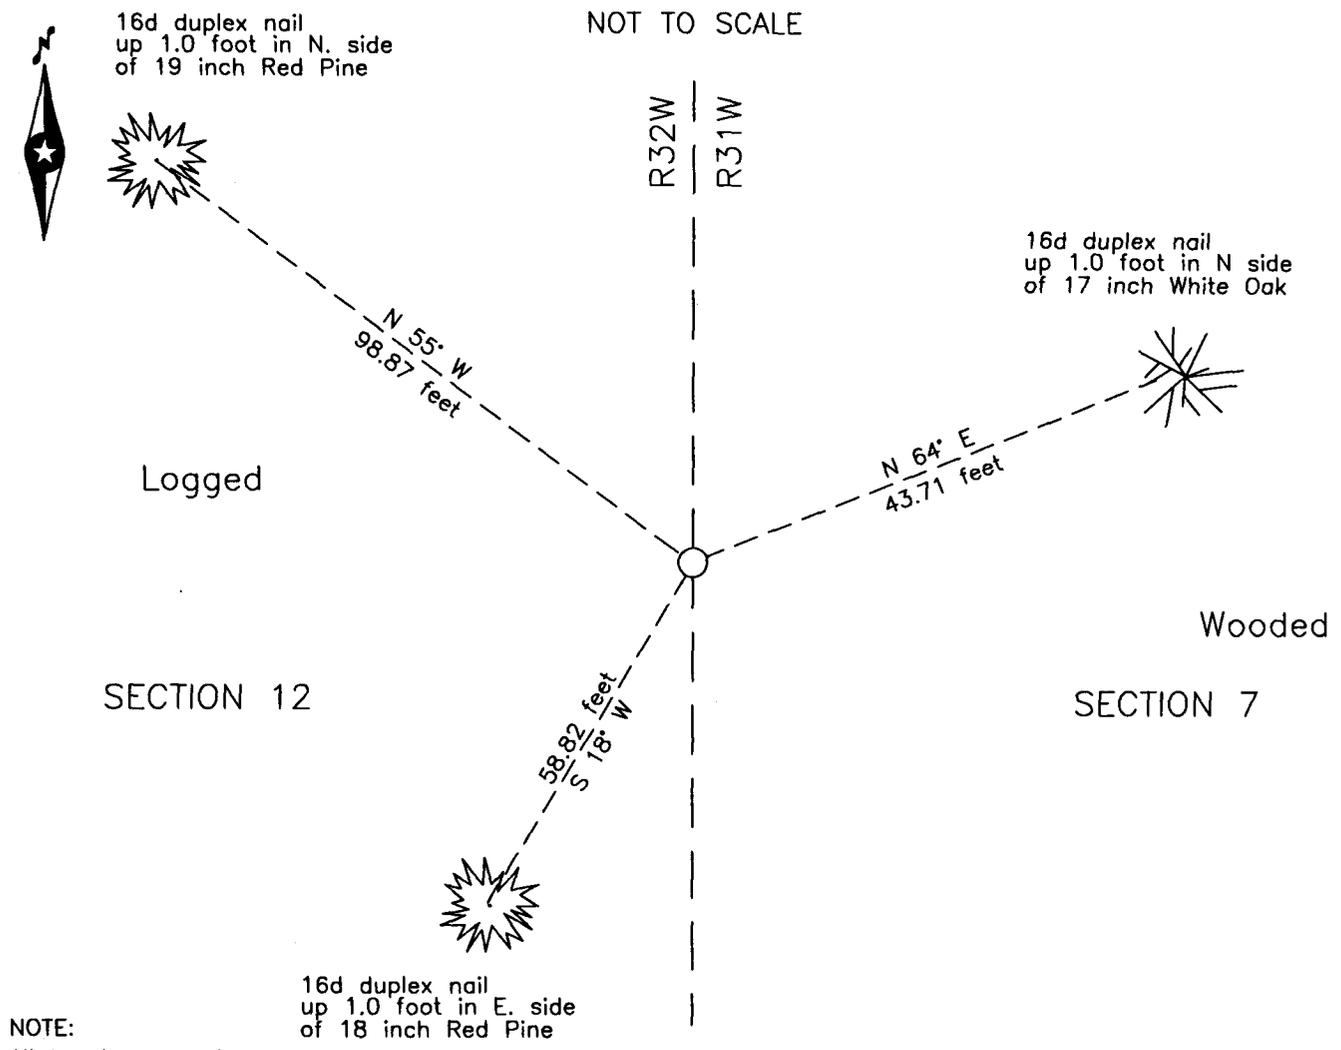

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 5/6/15 MN License No. 21367

Statement of Evidence**East corner Section 12, Township 137 North, Range 32 West, 5th Principal Meridian.**

July, 1860 J.W. Myers, General Land Office (GLO) Deputy Surveyor, notes for the survey of the 4<sup>th</sup> Guide Meridian set a post for the original corner and referenced it as follows:  
4" Aspen N 84° W 7 links (4.62 feet) 12" Pine N 27° E 45 links (29.70 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

March 2015 B. Hippen, technician, records of the CCHD/SO, set 1.25 inch outside diameter iron pipe, up 0.5 foot, at lost position, midway and on line between the Northeast and Southeast corner of Section 12 and witnessed as follows:  
19" N. Pine N 55° W 98.87 feet 17" White Oak N 64° E 43.71 feet  
18" N. Pine S 18° W 58.82 feet  
The recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCHD/SO in 2015 is the accepted location of this corner.**

**County Coordinates (Cass County South)**

Northing 296453.97

Easting 451449.18