



A000616454

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

10/20/2015 10:54:16 AM

AS DOC #: A000616454

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 126556

Index No. E.0-13.0


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 9, Township 137 N, Range 31 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 04/14/2015 Set 1/2" x 16" iron pipe with cap marked "Clark 44530"  
DATE

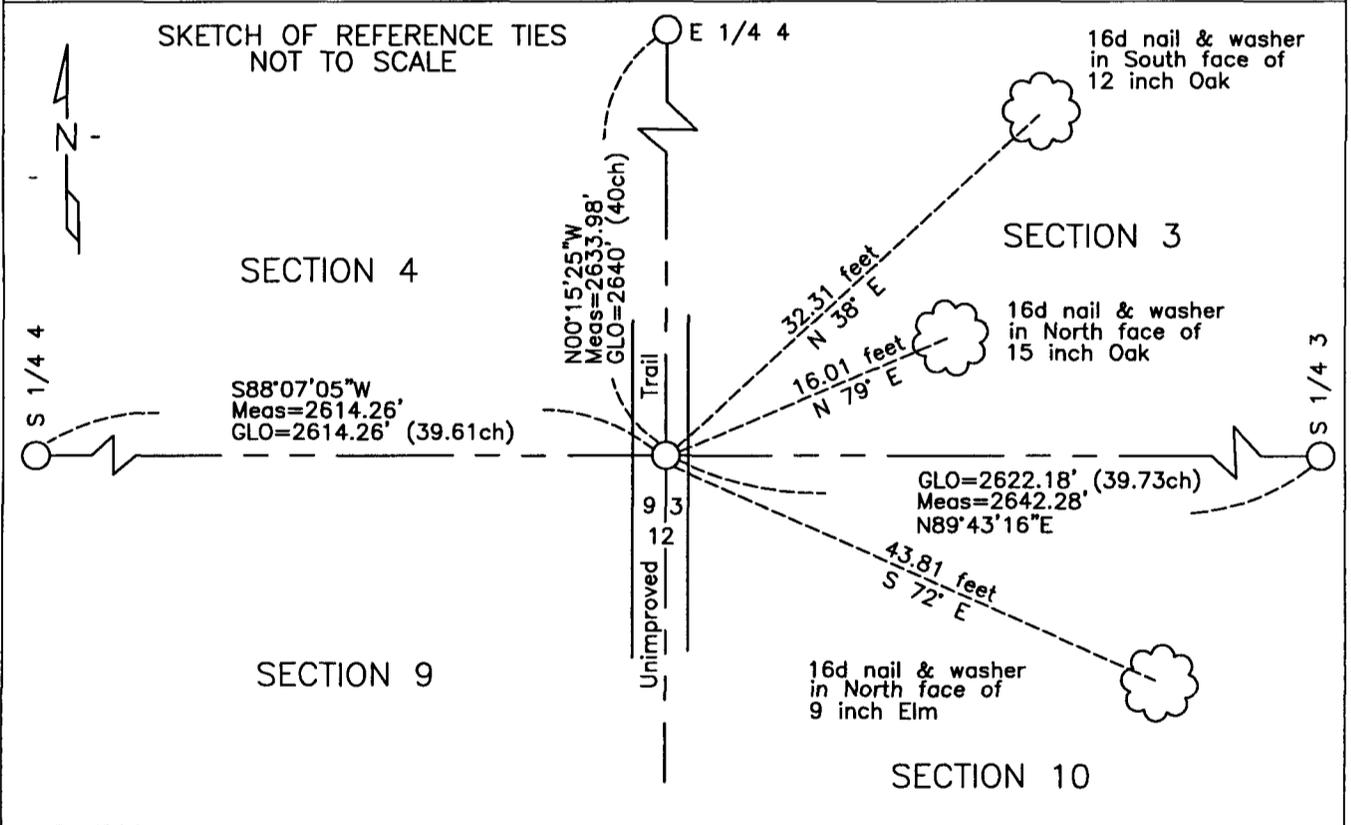

NAD83 (1996 ADJUSTMENT)  
CASS COUNTY SOUTH DATUM

N= 299,559.458  
E= 466,854.308

Statement of evidence relative to this corner is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Craig E. Johnson* 10/06/2015  
Craig E. Johnson DATE

Registration No. 44530

- Land surveyor,
- County Surveyor,

Page 1 of 2  
A000616454



**Index No. E.0-13.0**

Statement of Evidence

**Northeast corner of Section 9, Township 137 North, Range 31 West, 5th Principal Meridian.**

Nov/Dec 1870 Richard Cronk, Deputy Surveyor, General Land Office (GLO), set a post for the original corner and referenced it as follows:  
12" W.Pine N 30° E 24 links (15.8 feet) 10" W.Pine N 6° W 30 links (19.8 feet)  
10" W.Pine S 73° E 20 links (13.2 feet) 6" W. Birch S 76° W 34 links (22.4 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

April 2004 Kevin Metz, LS 40343, during the course of a survey of the southeast quarter of the northwest quarter of Section 3, Township 137 North, Range 31 West, Cass County Minnesota, established a position for the Northeast corner of Section 9. Mr. Metz provided coordinates for the corner and other supporting documentation to Clark Engineering on 6/22/2015. In a phone conversation on 6/22/2015, Mr. Metz indicated he used his position for the Northeast corner of Section 9 to prorate the North quarter corner of Section 10 and the East quarter corner of Section 4. No indication of monument set at corner.

April 2015 Craig Johnson, LS 44530, and Cody Johnson, technician, found no evidence of corner. Set a ½" x 16" iron pipe with cap marked "Clark 44530" at position established by Kevin Metz's April 2004 survey. New witnesses established as follows:  
12" Oak N 38° E 32.31 feet 15" Oak N 79° E 16.01 feet  
9" Elm S 72° E 43.81 feet

**County Coordinates (Cass County South)**

**Northing 299,559.458**  
**Easting 466,854.308**